


Death From Above Owner's Manual

SKAA® Pro Speakers 2-PACK

Designed by an
irreverent cadre
of Canucks who
live by the
mantra: " 2 > 1 "

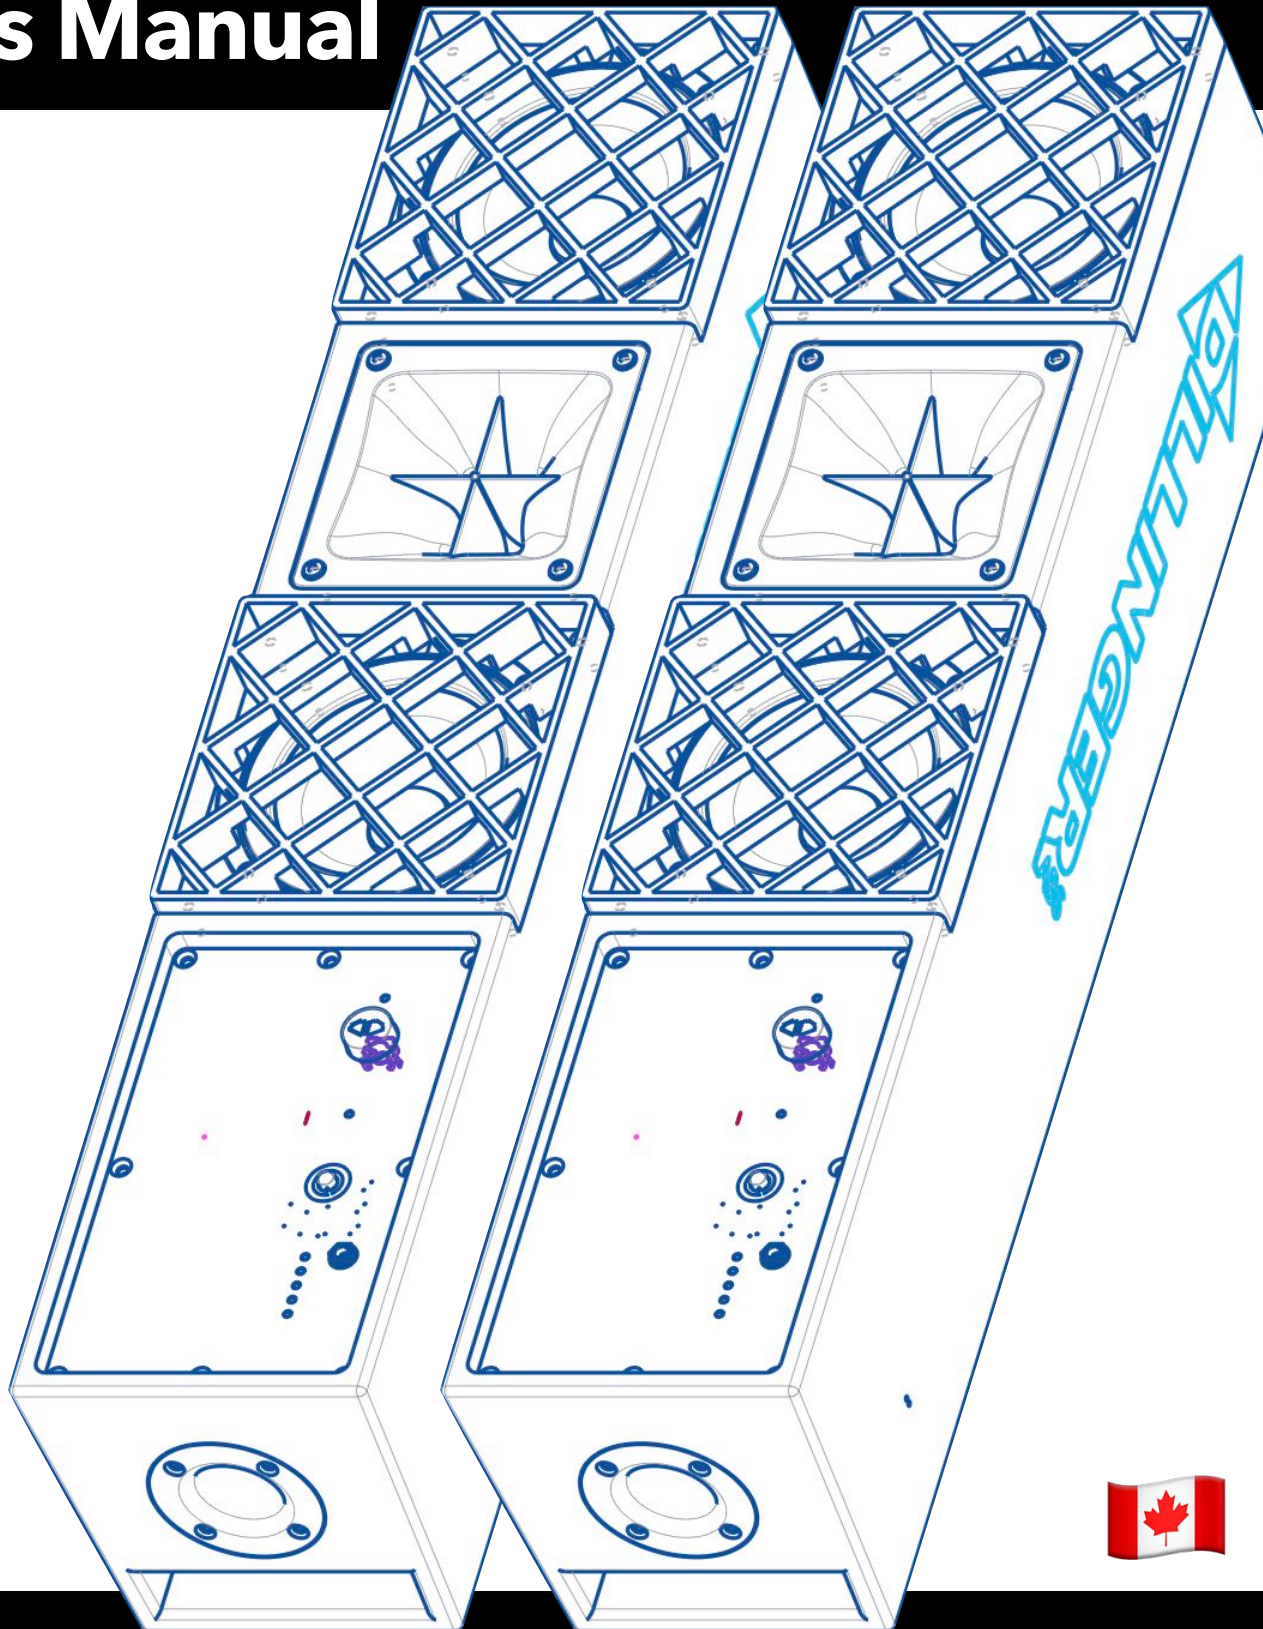

DILLINGER LABS

Introduction

Thank you for choosing Death from Above ("DFA") by Dillinger Labs. DFA speakers are fully-compliant SKAA / SKAA Pro Receivers. Feed DFA from a Dani, Cassandra or any other SKAA or SKAA Pro Transmitter, or a SKAA / SKAA Pro Hub speaker like Wet Sounds Portable (WS-L), Soundboks 3, 4, Go or Electrotec Stage One. Or even from a SKAA Pro mixer such as those from Cerwin Vega. Check SKAAstore.com for more SKAA transmit options.

- Pro-grade SKAA wireless audio. 100% Bluetooth-free. 100% WiFi free.
- Use up to 4 SKAA Receivers (any combination of Death from Above and any other SKAA Receivers) at the same time with any one SKAA Transmitter
- Remembers up to 10 of your favorite sources
- Low latency – great for live performance
- Choose from 6 EQ presets
- Configure DFA's audio routing from the front panel. Select from LEFT, RIGHT or MONO MIX audio. Easily set up two DFAs as a stereo pair.
- DFA remembers your EQ and audio routing setups – they'll be active until you change them again
- Pole mount your DFA on a DFB (Death from Below) subwoofer – they are made for each other
- Time Align function includes a selection of delays you can choose from
- Phase Flip function lets you invert the polarity of the driver to amp connection
- Tuned port extends DFA's bass response to 75 Hz
- Designed primarily to be used with subwoofers like DFB Mk2, DFA focuses on accurately reproducing 75 Hz to 20 kHz. DFA sounds fantastic, in part because it doesn't try to do what the subwoofer's good at.
- Dual crossover, true tri-amped 3-way speaker (ported with 3 separate acoustic chambers)
- Steel grilles shield radio frequencies and hence very significantly reduce the range of wireless speakers. And steel is heavy, too. DFA solves both of these problems by using glass fibre-reinforced PC grilles.
- Check out the Custom Shop at SKAAstore.com for alternative grille geometries plus white grilles you can paint and decal to make DFA uniquely your own

For the intrepid few who always wondered what this meant but were too busy kicking butt to ask ...



The SKAA® standard for wireless audio guarantees compatibility between all products bearing the SKAA Compatible Badge. It also guarantees product antenna performance by verifying reliable operating distance minimums have been met. SKAA Transmitters work with iOS & Android mobile devices, Mac & Windows computers, televisions and any product having a line output, S/PDIF output or a headphone jack.

SKAA semiconductor components enable SKAA to be embedded in consumer audio and pro audio products. Not based on Bluetooth or WiFi, SKAA is a global standard built from the ground up specifically for audio. Learn more at www.SKAA.com

- DFA runs for 16 hours at full volume from a fully charged battery (or over 50 hours at normal listening level). Its internal battery charges in 2.5 hours (from empty); charging brick power supply included.
- Charge the internal battery while playing DFA at full volume
- Or, use the included Y cable and charge both your DFAs at the same time
- Battery fuel gauge LED stack displays battery life remaining
- A pair of DFAs pole mounted atop two DFB subwoofers is an ideal setup for the gigging mobile DJ
- Works with the (optional) SKAA cmd app

We like to make our products easy to use and DFA is no exception !

Yes, it's time to peel the paint. You're chomping at the bit to catalyze a visit from the local 5-0. Still, we recommend you read this Owner's Manual sometime soon. Its pages are brimming with invaluable insights, irreverent commentary, and other assorted nuggets of reality-warping revelation. We really put our foot in this one and hope you love your Death from Above SKAA Pro speaker as much as we do!

QUICKSTART GUIDE

1. Power ON your SKAA source. This can be your phone/tablet plus a SKAA Transmitter (such as Cassandra or Diz), or a SKAA pro Transmitter (such as Dani) plugged into a DJ deck, iPod or mixer, or a SKAA Hub like Soundboks (3, 4 or Go), Wetsounds Portable or Electrotec Stage One (in Hub mode).
2. Play some music through your SKAA source device and power ON your DFAs. If you don't hear your music playing through your DFAs, double click their Bond Buttons.
3. Turn up DFAs' volumes and check out the EQ options later in this manual
4. Have donuts ready for the cops

Getting Started


- Power DFA ON/OFF by holding the power button down for a few seconds
- A bright Green Power LED means DFA is on
- A dim Green Power LED means DFA is sleeping
- A bright Red Power LED means DFA is on and Bonded to a SKAA Pro Transmitter
- DFA auto switches to SKAA or SKAA Pro mode, following the mode of the Transmitter DFA is Bonded to
- The Bond Button is used to connect to audio sources (SKAA Transmitters or SKAA Hub speakers) and it also doubles as the volume knob
- Turn the volume knob clockwise to increase the volume and counter clockwise to decrease it – 30 steps (clicks on the knob) will take you from zero volume to max
- Watch the Bond Indicator as you turn DFA's volume knob – it will flash once for every one of the 30 steps - when it stops flashing, you've arrived at one extreme or the other
- Remember, the output level of DFA depends on both its Local Volume (DFA's volume knob) and the Global Volume set by the SKAA Transmitter (for example, Dani's volume knob)
- Global and Local volume example: say your SKAA Transmitter is set to 50% and DFA is set to 80% then the net output level will be $0.5 \times 0.8 = 0.4 = 40\%$
- Bond Button: Triple click (click 3 times, fast) to mute DFA's output. Triple click again to unmute.
- Bond Button: Double click to search for a new Transmitter; one that's not on your DFA's Green List (favorites list). Once DFA has Bonded to a new Transmitter, its Bond Indicator will glow bright Amber.
- Bond Button: Press and hold the Bond Button for a few seconds to add an Amber-Bonded Transmitter to the Green List. The Bond Indicator will glow bright Green; DFA memorizes the Transmitter as a "favorite" and will look for it specifically the next time you power on.
- See the SKAA Receiver User's Guide later in this manual for more Bond Button / Bond Indicator functions
- Just add a Dillinger Labs Streetheart Receiver to any powered speaker (Mackie, QSC, EV, etc.) to make it SKAA and SKAA Pro compatible & add it to your setup
- DFA natively supports the professional Dani SKAA/ SKAA Pro Transmitter as well as all other SKAA and SKAA Pro wireless audio Transmitters and sources
- Check out **Sweet Hookups**; a collection of use case diagrams at the end of this manual. They're just the tip of the iceberg but we bet at least a few of them will inspire you to try some crazy-ass stuff with your DFAs.

Bond Indicator: shows SKAA's Bond status

Bond Button – it's also the Volume Knob

Power LED is bright green (or red) when DFA is on

Power ON/OFF by holding down this button for a few seconds

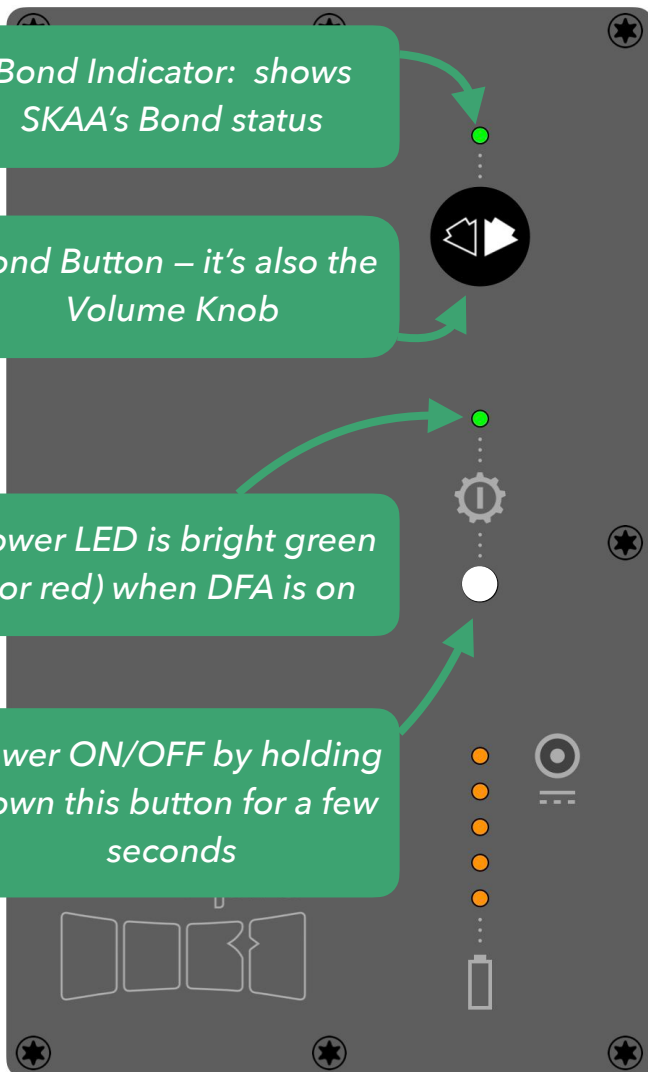

What if we ditched all the crap features you didn't want anyway?

My previous clothes washing machine had WiFi. Oh yeah, it had bags of features, but many of them felt contrived. It stopped washing clothes after less than 2 years due to mechanical failure. Sound familiar? Today I own a washer that's focused on getting clothes clean and staying reliable for 20 years. I'm happy; I smile every time I look at it. This is exactly the idea behind DFA.

Spoiler ... we used the money we saved to build you a 2nd DFA speaker.

Ok, DFA is lean –so what's missing??

- *Bluetooth. DFA is a SKAA speaker. Bluetooth audio is janky enough if you're running sound for a party and **really** freakin' janky if you're a pro DJ. So we disappeared it.*
- *Wired inputs and outputs. DFA has none. Audio inputs, for example, belong on your SKAA Transmitter or SKAA Hub speaker. There are lots of options for feeding audio to your DFA, including the Dani SKAA Pro Transmitter from Dillinger Labs plus Hub speakers from many brands.*
- *Battery Cartridge. Remember way back when mobile phones had swappable battery cartridges? But then battery life dramatically increased and swapping the battery was no longer needed. It's like that.*

All will be immaterial when you set your DFAs up as a Left/Right STEREO PAIR and drop the needle. The stereo imaging will make the hairs stand up on your arms and like magic, the list of missing features will no longer matter.

A huge THANK YOU for your purchase! Please contact us and let us know how we did! And send us a pic of you and your DFA and we'll post it on our SM. dillingerlabs.com/contact. XOXOXO


... the DFA dev team

- **It's a 2-PACK; you can set them up as a stereo pair**
- **50 hour battery life**
- **Stunning sound, stunning look**
- **3-way acoustics, dual crossover in DSP & they're tri-amped**
- **Perfect top for your DFB subwoofer**
- **1 knob operation**
- **SKAA and SKAA Pro wireless Receiver**
- **EQ, Phase and Time Align settings**
- **There's an app, but you won't need it**
- **Only 6.5 kg per speaker**

Battery & Charging

You may either:

1. Charge 2 DFAs at the same time (with neither playing) by using the included Y cable, or,
2. Charge 1 DFA and, at the same time, play that same DFA at max volume

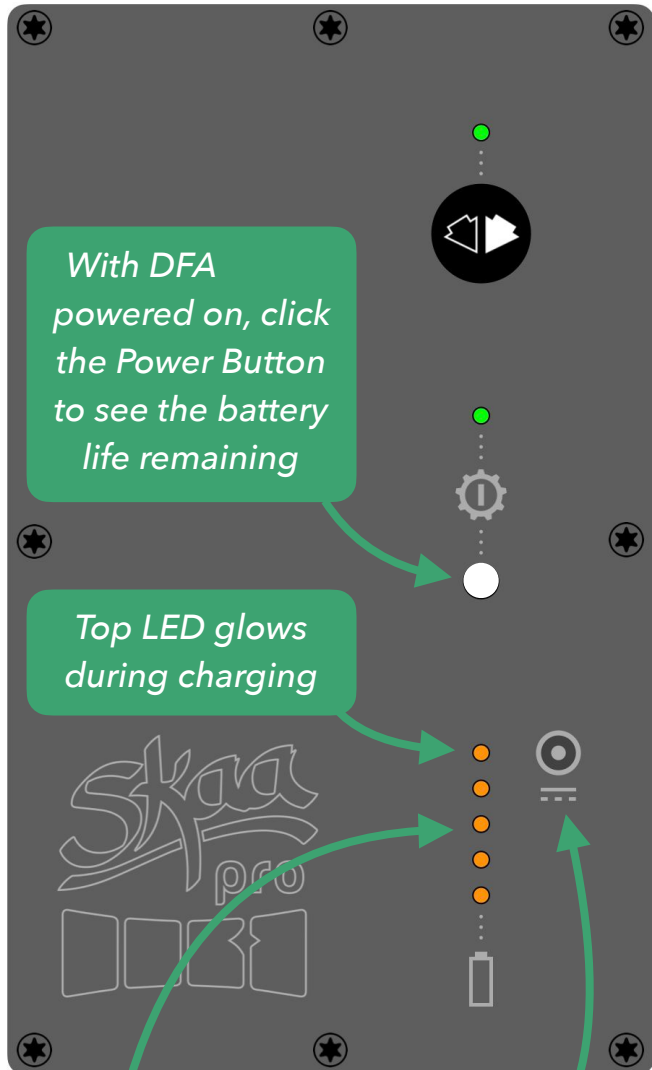

With DFA powered on, click the Power Button to see the battery life remaining

Top LED glows during charging

Power Jack - Use only the included 125W Brick Power Supply to charge your DFAs

This stylin' stack of orange LEDs is the Battery Fuel Gauge

- Death From Above runs for up to 50 hours at normal listening levels, and up to 16 hours at max volume
- Some battery speakers from well-known brands waste up to 20% of their battery energy in a voltage conversion process – we think that's nuts, so we don't do it that way. We chose DFA's audio amplifiers specifically so wasteful boost conversion isn't needed.
- Use only the included Brick Power Supply for charging
- The battery will charge to full in about 2.5 hours (from fully depleted)
- You can use DFA (even at max volume) while charging. In this case make sure you are charging one speaker only.
- The Battery Fuel Gauge (LED stack) gives you a visual indication of the amount of energy remaining in the battery. When activated, it stays on for a few seconds and then automatically shuts off.
- To activate the Battery Fuel Gauge while DFA is powered on, click the power button once –this feature is disabled if external power is being supplied to DFA by the Brick Power Supply
- You will see the Battery Fuel Gauge activate whenever you power on DFA (so long as the Brick Power Supply is not connected)
- When about 3% battery capacity remains, the bottom LED in the Fuel Gauge stack will start to flash –no click on the power button is needed to get this “low battery” (flashing) alert
- DFA will power itself OFF when its battery is empty
- When DFA's battery is charging, the top LED in the stack (the one right beside the power jack) will glow, even if DFA is powered OFF
- Once charging has finished, the top LED in the stack will turn off, letting you know that DFA's battery is now fully charged
- If DFA remains not Bonded to a SKAA Transmitter for an extended period of time, it will enter a power saving **sleep** mode (DFA's power LED will be dim Green during sleep)
- If the Brick Power Supply is plugged in, DFA will stay in sleep perpetually until Bond is restored, but if the Brick Power Supply is NOT supplying external power, DFA will eventually automatically power itself OFF
- Keep in mind that DFA's cascade into sleep and possibly auto OFF is triggered solely by loss of Bond
- Years down the road, your DFA may benefit from a new battery pack. We'll have replacement packs available on SKAAstore.com along with a helpful video on how to swap them.


The Details ... Sweated

3-Way & Tri-Amped

a 36W amp
for the mid
woofer



a 36W amp
for the tweeter



a 72W amp for
the bass woofer




one-knob
control

6 EQ presets



negative weight
monkey-grip handle



auto switches between
SKAA and SKAA Pro

downward firing bass
reflex port



steel bushing for pole and
tripod mounting




Power User Features:

It's best to use these Power User Features while NOT charging; charging also uses the LED stack.

While in EQ Select mode, turn the volume knob to select one of six available EQ presets

Double click the power / gear button to enter EQ Select mode

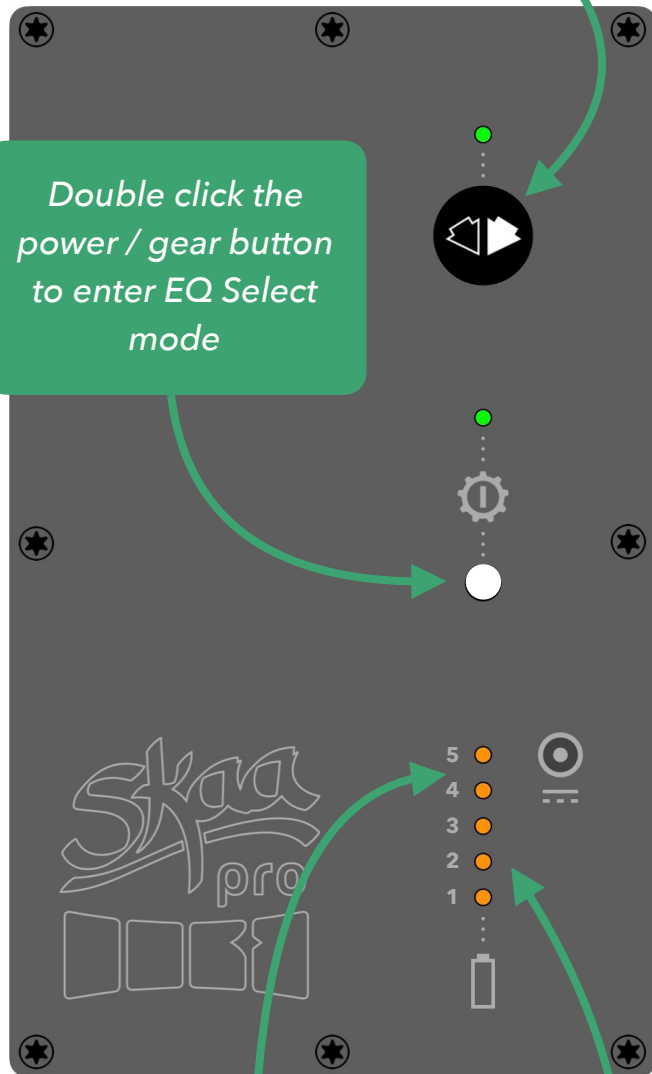

The top 2 LEDs in the stack will flash to let you know you've successfully "2x clicked" and entered EQ Select mode

Watch the LED stack change as you turn the volume knob

EQ Select

- EQ Select mode lets you pick from 6 different filter and equalization presets so you can customize the crossover point with your subwoofer as well as sculpt the overall character of your DFA's sound
- Double click the Power/Gear button to enter EQ Select mode (press and release twice, quickly)
- The top 2 LEDs in the LED stack will flash to let you know that your 2x click command was recognized and you're now in EQ Select mode
- Turn the Volume Knob while watching the LED stack to rotate through DFA's six EQ presets

LED	EQ	DESCRIPTION
5	OUTSHINED	Like OUTSIDER, but with a brighter top end for huge, wide-open outdoor venues
4	OUTSIDER	Great for most outdoor gigs.
3	INSIDE SCOOP	Similar to INSIDER, but with some lower mids scooped out
2	INSIDER	This is DFA's factory default setting. Use indoors when you want a flat response.
1	UNFATHOMABLE	Similar to BOTTOMLESS, but with EQ applied to sculpt the bottom end
OFF	BOTTOMLESS	For indoor use when you DON'T have a DFB (or other) subwoofer


- Each EQ preset also includes a high-pass filter; see the **Specifications** page for the filter details, including exact cutoff frequencies
- Experiment with all 6 EQ settings and trust your ears – remember, if it sounds good, it **is** good
- If you're using DFA with a subwoofer such as DFB (recommended), be sure to use EQs 2 to 5 in order to help avoid comb filtering artifacts
- 10 seconds after you stop turning the volume knob, DFA will exit EQ Select mode and return to normal operation
- DFA will remember your chosen EQ preset. Even if you power your speaker off and on, your selected EQ preset will remain active until you use this function to select another one.
- New out of the box, your DFA is set to INSIDER (EQ 2)
- Doing a Factory Reset on your DFA (6x click on the Bond Button) will reset the EQ to its Factory Default (INSIDER = EQ 2)

Power User Features:

It's best to use these Power User Features while NOT charging; charging also uses the LED stack.

While in Phase Flip mode, turn the volume knob to select one of two available settings

3x click the power / gear button to enter Phase Flip mode

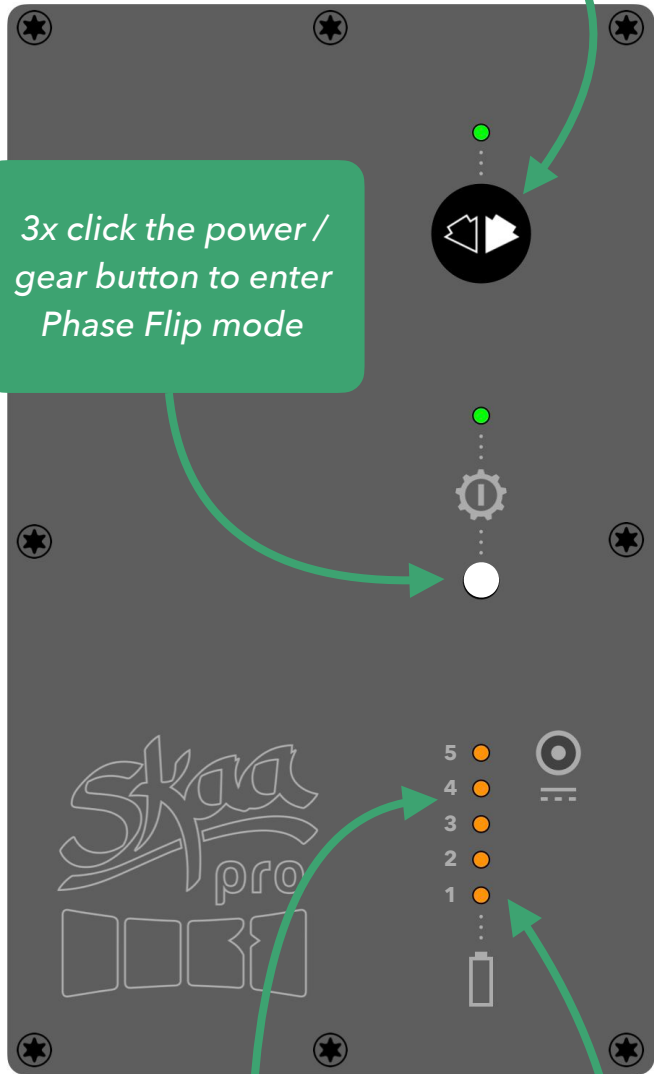

The top 3 LEDs in the stack will flash to let you know you've successfully "3x clicked" and entered Phase Flip mode

Watch the LED stack change as you turn the volume knob

Phase Flip

- Phase Flip mode lets you invert the polarity of DFA's output
- Set your desired EQ and Time Align first, then play music through all your DFAs and subwoofers and have a buddy stand in the typical listening area and give you feedback. Try both Phase Flip settings and ask your listener buddy which setting sounds "fuller".
- 3x click the Power/Gear button to enter Phase Flip mode (press & release 3 times, quickly)
- The top 3 LEDs in the LED stack will flash to confirm your 3x click command was recognized and you're now in Phase Flip mode
- Turn the Volume Knob while watching the orange LED stack to rotate through DFA's two Phase Flip options:

LED	Phase	DESCRIPTION
5	-	NOT USED
4	-	NOT USED
3	-	NOT USED
2	-	NOT USED
1	FLIP	Invert Polarity 180°
OFF	NO FLIP	Don't Invert Polarity

- Normally, you'll want to keep your DFAs set to NO FLIP (all orange LEDs off)
- 10 seconds after you stop turning the volume knob, DFA will exit Phase Flip mode and return to normal operation
- DFA will remember your Phase Flip setting. Even if you power your speaker off and on, your selected Phase Flip setting will remain active until you change it by using this function again.
- New out of the box, your DFAs are set to NO FLIP.
- Doing a Factory Reset on your DFA (6x click on the Bond Button) will reset Phase Flip to its Factory Default setting (NO FLIP)

Power User Features:

It's best to use these Power User Features while NOT charging; charging also uses the LED stack.

While in Audio Routing mode, turn the volume knob to select one of three available routings

4x click the power / gear button to enter Audio Routing mode

The top 4 LEDs in the stack will flash to let you know you've successfully "4x clicked" and entered Audio Routing mode

Watch the LED stack change as you turn the volume knob

Audio Routing

- Audio Routing mode lets you pick from 3 different Audio Routing options
- 4x click the Power/Gear button to enter Audio Routing mode (press & release 4 times, quickly)
- The top 4 LEDs in the LED stack will flash to confirm your 4x click command was recognized and you're now in Audio Routing mode
- Turn the Volume Knob while watching the orange LED stack to rotate through DFA's three Audio Routing options

LED	ROUTING	DESCRIPTION
5	-	NOT USED
4	LEFT	SKAA channel 1 (LEFT) is routed to DFA's amplifiers and output
3	RIGHT	SKAA channel 2 (RIGHT) is routed to DFA's amplifiers and output
2	MONO	SKAA channels 1 & 2 (L & R) are mixed together, sent to DFA's amps and output
1	-	NOT USED IN DFA. In stereo devices like Streetheart, the lowest LED means STEREO.


- Since DFAs come in a 2-pack, try setting up a stereo pair (set one of your DFA's Audio Routing to LEFT and set the other one to RIGHT).
- Try this with 2 towers (2x DFA pole mounted atop 2x DFBs, for example). And for fun, set the DFBs up as a stereo pair, too. Just be sure you have a clean pair of underwear handy.
- Another reason you may want to set your DFAs to LEFT and RIGHT is if you're transmitting 2 different audio programs on SKAA's 2 channels (for example, 2 different music playlists for 2 different rooms)
- 10 seconds after you stop turning the volume knob, DFA will exit Audio Routing mode and return to normal operation
- DFA will remember your Audio Routing setting. Even if you power your speaker off and on, your selected Audio Routing will remain active until you use this function to select another one.
- New out of the box, your DFA is set to MONO (indicated by LED 2 being on).
- Doing a Factory Reset on your DFA (6x click on the Bond Button) will reset Audio Routing to its Factory Default (MONO = LED 2)
- The SKAA cmd app can also set Audio Routing

Power User Features:

It's best to use these Power User Features while NOT charging; charging also uses the LED stack.

while in Time Align mode, turn the volume knob to select one of six available settings

5x click the power / gear button to enter Time Align mode

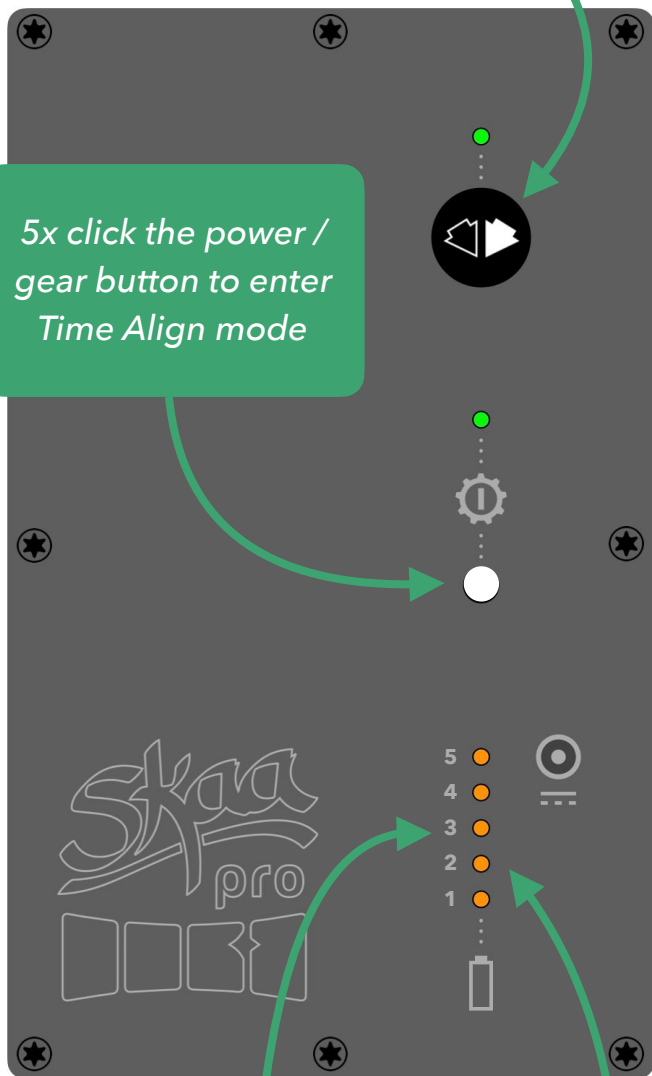

all 5 LEDs in the stack will flash to let you know you've successfully "5x clicked" and entered Time Align mode

watch the LED stack change as you turn the knob


Time Align

- Time Align mode lets you pick from 6 different delay settings, including OFF (no delay added)
- 5x click the Power/Gear button to enter Time Align mode (press & release 5 times, quickly)
- All 5 LEDs in the LED stack will flash to confirm your 5x click command was recognized and you're now in Time Align mode
- Turn the Volume Knob while watching the orange LED stack to rotate through DFA's six Time Align settings

LED	TIME ALIGN SETTING
5	add 11 milliseconds delay
4	add 7 milliseconds delay
3	add 4 milliseconds delay
2	add 2 milliseconds delay
1	add 1 millisecond delay
OFF	NO DELAY ADDED

- Experiment with different settings to find what sounds good in your situation. Align with your other speakers bang on, or try DFA ahead or behind the others by a few ms for an epic "huge" sound. Trust your ears. As a general rule, top speakers like DFA should be ahead (delayed less) versus subwoofers.
- Generally, you'll want your 2 DFAs to have the same Time Align setting. Having said that, setting them a 1 or 2 ms apart can be used to create a Phased Array which can be used to "beam" audio in a particular direction. It's fairly easy to search for and find videos on the internet for how to do this.
- When you use DFA with a DFB sub, try setting DFA to time align 0 and DFB to preset 2, 3 or 4 to get the treble arriving just ahead of the bass
- When using DFA alongside Soundboks 3, 4 or Go, try setting DFA to Time Align 2, 3, 4 or 5. Use whichever setting sounds the most "sync'd up".
- 10 seconds after you stop turning the knob, DFA will exit Time Align mode and return to normal operation
- Even if you power your speaker OFF and ON, your selected Time Align setting will remain active until you use this function to select another one.
- New out of the box, your DFAs are set to NONE
- Doing a Factory Reset on your DFA (6x click on the Bond Button) will reset the Time Align setting to its Factory Default (OFF)

The Cabinet

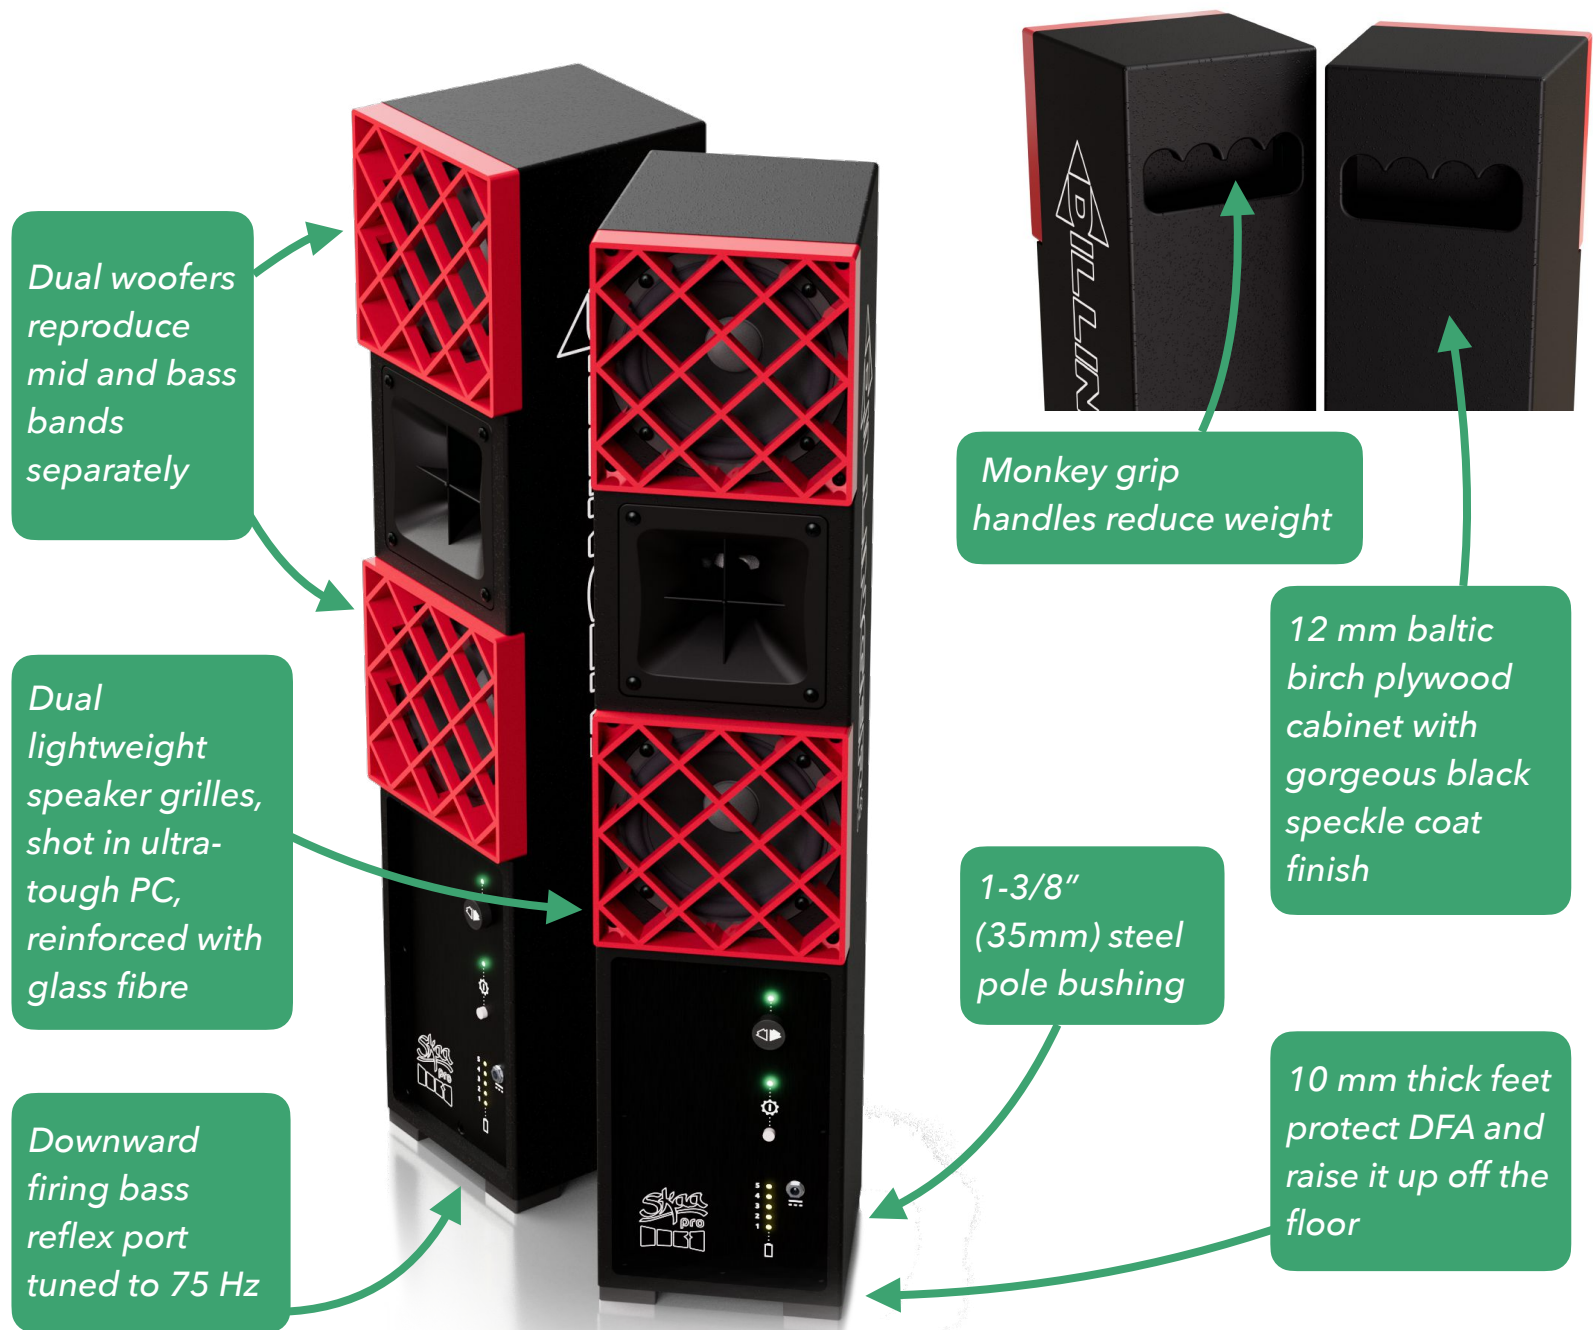

- DFA's cabinet is built from high-grade 12mm birch plywood making it both tough and light weight.
- 5 of 6 of DFA's walls are featureless and very resilient to impacts. DFA's front is protected by two robust grilles and an inset, 3mm thick aluminum user panel.
- Gorgeous and robust speckle-paint matte black finish – yes, the classy one – it's beautiful, tough and LIGHTWEIGHT
- DFA's large L-shaped rubber feet help protect it during transport and also provide an air gap for the port to be able to breathe, in a pinch, if you're playing DFA while it's sitting on the floor.
- But we *really* recommend using DFA on a pole, tripod or short stand to get the best sound. See SKAAstore.com for great options for getting your DFAs "up off the floor"

- Pop DFA up on just about any industry-standard 1 3/8" (35mm) speaker tripod (not included) to get it up off the ground
- Or even better, use a speaker pole (available at most music shops and at SKAAstore.com) atop of DFB (or almost any subwoofer)
- Your DFAs' monkey grip handles enable serious manhandling while literally reducing DFA's weight at the same time – these handles are designed to let you easily carry 2 DFAs; one in each hand
- Weather resistant – DFA is good to go, regardless of where and when your gig is happening – we put the port exit on the bottom for a reason!
- Gorgeous 3mm-thick anodized aluminum control panel. It's hefty to make DFA tough, and it doubles as a massive heat sink for DFA's multiple audio amplifiers. With a heat sink this big, DFA can actually deliver the full rated amplifier wattage to your cottage.

SKAA cmd

SKAA cmd ("SKAA command") is The App You Don't Really Need. If you never download it, never install it, and never launch it, your DFA will still work just hunky dunky. But once you learn about what SKAA cmd can do, you might just *want* it...

SKAA cmd adds a long list of features to your SKAA setup. Use it with Cassandra, Diz and Ursula Transmitters. Add custom names to Receivers, easily mute any or all of your Receivers, adjust individual volumes, see which Receivers are Bonded to your Transmitter and more.

The SKAA cmd App is available for iOS, Android, Mac, and Windows. Download it from Apple's App Store, Google Play, and at SKAA.com/TLC.

Check out the SKAA cmd App User's Guide, also on

1. Each Transmitter has 4 bays – you can Bond a single Receiver or a Cluster into each bay

2. Slide a fader to change the volume of a Receiver – its volume is also affected by No. 4.

3. Click the "i" ball to see the SKAA cmd app version and the Transmitter firmware version

4. Global volume control. This fader affects volume on all Bonded Receivers.

5. Mute Macro: clicking this triangle is a quick way to mute all Bonded Receivers. Click each Receiver's speaker icon individually to unmute and get audio playing again.


6. Transmitter Power Mode
RED: Always ON
GREY: Always OFF
WHITE: ON only when there is audio

7. Click to edit the name of your Transmitter

8. Audio Routing: The Green Bond Block lets you choose whether a Receiver is playing Left, Right, Mono Mix or Stereo audio. Since DFA is a single-channel device, the stereo option is hatched out (disabled in DFA). From the factory, DFA is configured for Mono Mix audio (that's the icon with a downward firing speaker). Make one DFA Left and another DFA Right if you want a stereo pair.

9. Click to mute this Receiver. Click again to unmute.

10. Click to edit the name of your Receiver

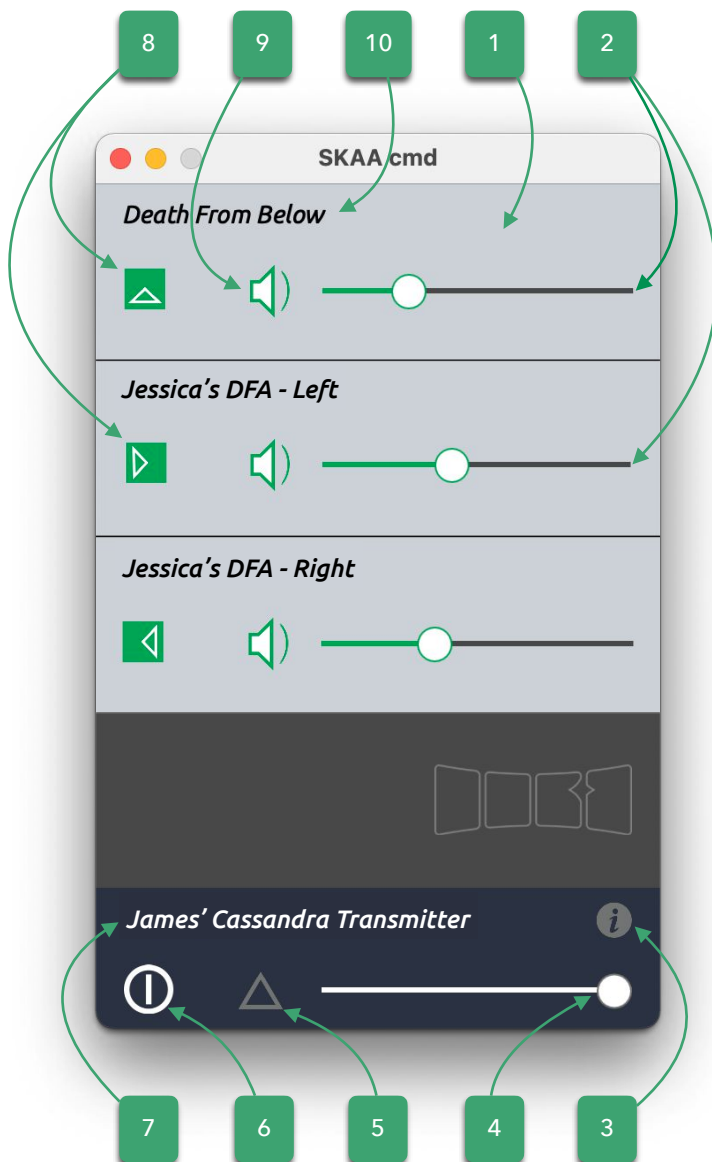

Specifications

Parameter	Conditions	Value
Cabinet Construction		12mm birch plywood, black speckle finish, candy apple red ABS grilles, large L-shaped rubber feet
General Topology	Crossover, all EQs and filters implemented in Analog Devices DSP	144W RMS, 3-way mono speaker, 3 acoustic chambers, ported, dual DSP crossover, tri-amp'd
Battery Capacity	Built-in battery pack, lifetime 750 charge/discharge cycles	Li-ION 6S 2P pack, 21.9VDC nominal LMC: 99.65 Wh
Run Time	Normal listening	Up to 50 hours
Run Time	Full Volume	Up to 16 Hours
Charge Time	From Empty	2.5 Hours
Amplifier Power	Bass channel (DFA is tri-amp'd)	72 W RMS (1 x 72W Infineon Amplifier)
Amplifier Power	Mid channel (DFA is tri-amp'd)	36 W RMS (1/2 x 72W Infineon Amplifier)
Amplifier Power	Horn channel (DFA is tri-amp'd)	36 W RMS (1/2 x 72W Infineon Amplifier)
Amplifier Type		3-channel, Multi-rail Class D, I2S input, I2C gain
Heat Sink	Direct connected by aluminum block	215 x 130 x 3 mm aluminum plate to amp heat sink
Bass Woofer		40W RMS 60W Peak, 4Ω, 138mm, 55Hz to 2kHz
Mid Woofer		30W RMS 60W Peak, 4Ω, 138mm, 200Hz to 4kHz
Horn Tweeter		20W RMS 60W Peak, 4Ω, 25mm, 2 kHz to 20 kHz
Port		1 bass reflex port, downward firing, tuned to 75 Hz
Crossover	Implemented in Analog Devices DSP	500 Hz (bass / mid) and 4000 Hz (mid / treble). Linkwitz-Riley 24 dB/octave LPF and HPF filters
Acoustic Max Output	Music program at 1m, A-weighted	122 dB SPL
Frequency Response	EQ 2, Ref: 997Hz @ 1W, AES17 LPF	55 Hz - 20 kHz +/- 3dB
THD+N	55 Hz - 20 kHz	< 0.15%
SNR	A-weighted, Ref: 997Hz @ 1W	83 dB
Digital Resolution	Each of 2 available SKAA channels	48 kSamples/s, 16 bit
Antenna Type		FE Model B0
RF Power	Maximum	+18 dBm
Wireless Range	Actual range depends also on the antenna performance of Transmitter	Up to 50 meter reliable range
Inputs	SKAA OS 2.1 and later	Any SKAA or SKAA Pro wireless audio source
Standard Compatibility	SKAA OS 2.1 and later	Any SKAA or SKAA Pro Transmitter, any Nadja Hub
Transport Latency	I2S Digital to I2S Digital, SKAA	36.71ms +/- 1.5 samples
(cont.)	I2S Digital to I2S Digital, SKAA Pro	19.39ms +/- 1.5 samples
Max Receivers	Concurrent DFAs per Transmitter	4 (SKAA Transmitter) or 2 (SKAA Pro Transmitter)
Dimensions With Feet (HxWxD)	1 DFA speaker, including feet	685 x 149 x 158 mm
Dimensions W/O Feet (HxWxD)	1 DFA speaker, not including feet	675 x 149 x 158 mm
Mass	1 DFA speaker, no power supply	6.54 kg
Weight	1 DFA speaker, no power supply	14.4 lbs
Power Supply Rating	External floor brick type	Input: 100-240 VAC, 50/60Hz, Output: 26V 125W

Specifications (continued)

EQ Preset	High-pass filter	Contour Shape Description
5 Outshined	90 Hz Chebyshev Type 1	Like Preset 4 but with boosted highs for very large wide-open spaces
4 Outsider	90 Hz Chebyshev Type 1	For outdoor use
3 Inside Scoop	70 Hz Chebyshev Type 1	Like Preset 2 but with EQ applied to carve out some midrange
2 Insider	70 Hz Chebyshev Type 1	DEFAULT setting – a flat, balanced response for indoor venues
1 Unfathomable	55 Hz Chebyshev Type 1	Like Preset 0 but with EQ applied to contour the bass
0 Bottomless	55 Hz Chebyshev Type 1	When you want to use your DFAs without a subwoofer

Power/Gear Button Function Summary

User Action	Function	LED Stack Feedback upon Entering Mode	Turn Volume Knob to make Selection	Display
Hold	Power on/off	None	No	Power LED turns on/off
Click	Fuel Gauge	None	No	LED stack shows battery energy remaining User can also Click to exit below 4 modes (confirm selection and exit)
2x Click	EQ Select *	Top 2 LEDs flash twice	Yes	LED 5 = Outshined LED 4 = Outsider LED 3 = Inside Scoop LED 2 = Insider LED 1 = Unfathomable None = Bottomless
3x Click	Phase Flip *	Top 3 LEDs flash twice	Yes	LED 1 = Invert Output Polarity No LED = Don't Invert Output Polarity
4x Click	Audio Routing *	Top 4 LEDs flash twice	Yes	LED 4 = Left (output SKAA ch1 only) LED 3 = Right (output SKAA ch2 only) LED 2 = Mono (output sum ch1+ch2)
5x Click	Time Align *	All 5 LEDs flash twice	Yes	LED 5 = Add 11 ms Delay LED 4 = Add 7 ms Delay LED 3 = Add 4 ms Delay LED 2 = Add 2 ms Delay LED 1 = Add 1 ms Delay None = No Delay Added

* See the associated **Power User** page earlier in this manual for detailed information about this function.

SKAA® RECEIVER USER'S GUIDE

Each SKAA receiver uses a *Green List* to remember your *favourite* audio sources (SKAA transmitters). A Green glowing Indicator on your receiver means you are listening to a favourite, or hunting for one. You can also *explore* to find new transmitters—an Amber Indicator means you are *exploring* for transmitters which are not on your Green List. The  Bond Button on your receiver lets you select which audio source (SKAA transmitter) you're listening to.

Essentials

 Button	Command	Indicator
Hold a few seconds	<u>Add / Delete</u> Manually add / delete the current transmitter to / from your Green List	 to  = Added  (flash) = Deleted
-	<u>Auto Add</u> SKAA will automatically add the current Amber transmitter to your Green List if you listen to it for 30 minutes	 to  = Added
1 Click	<u>Green Mode</u> Rotate through your list of <i>favourite</i> transmitters (Green List) — when a favourite transmitter is found, the search stops and audio plays from that transmitter	 (dim) = Hunting  (flash) = Next one  (bright) = Bonded
2 Clicks	<u>Amber Mode</u> <i>Explore</i> for new, unknown transmitters (ones which are not already on your Green List)	 (dim) = Hunting  (bright) = Bonded

More Commands

 Button	Command	Indicator
3 Clicks	<u>Mute</u> do again to Unmute; any Click command will first Unmute and then do its function	 ,  or  = Muted (slow flash)
4 Clicks	<u>Red Mode</u> If you have 2 or more transmitters on your Green List, power on just the one you want to hear and it plays automatically.	 (dim) = Hunting  (bright) = Bonded
6 Clicks	<u>Factory Reset</u> Clear Green List. Start Over!	 (flash) = Reset Done
Hold during power on	<u>Make a Cluster of Receivers:</u> 1. Power off all transmitters and receivers 2. Power on the Master receiver while holding down its Bond Button—hold the button down until the Indicator begins to flash Red 3. With the remaining receivers within 3 meters of the Master receiver, power on the first one, wait for its Indicator to flash Red and then power on the second one; continue until all of them are powered on 4. Once all of the Indicators stop flashing (turn solid Red), power off all of the receivers	 (flash) = Receiver has entered 'Cluster Up' mode  (bright) = The Cluster has been successfully made

QUESTIONS AND ANSWERS

Question	Answer
How does the Green List work?	You can store up to 10 SKAA transmitters on your Green List. These are your “favourite” audio sources. Every time you add a transmitter, it is assigned the first open spot on the Green List. When you single click the  Bond Button, the receiver hunts through the Green List much like a car radio hunts for radio stations when you press seek. If the Indicator is dim Green and flashes every few seconds, this tells you the receiver is hunting through the Green List. Say you have 5 transmitters on your Green List; your receiver will hunt through the list one by one: 1, 2, 3, 4, 5 and then back to 1 and so on. The dim Green Indicator flashes every time the receiver moves to the next spot on the list. This hunting goes on for up to 1 minute. If your receiver doesn't find any of your favourite transmitters, it stops hunting and just waits for the last bonded favourite. If your receiver does find one of your favourite transmitters, the hunting stops, the Indicator turns bright green, and your receiver starts playing audio from that favourite. A dim Green Indicator that is NOT flashing means the receiver is just sitting on one spot, waiting for a specific favourite transmitter to show up.
How do I bond with a specific Green transmitter?	Play audio from your source device and ensure it has a SKAA transmitter connected. Click the  Bond Button on your receiver. The receiver hunts through the Green List, flashing the Indicator as it goes. Once your receiver finds one of your favourite transmitters, it bonds to it and plays audio from that transmitter. If that isn't the transmitter you wanted, click the Bond Button once more. Repeat until your receiver bonds with the transmitter you want and you're hearing the correct audio playing.
How do I select transmitters if I can't reach my Bond Button?	Say you want to put your receiver on a high shelf where you can't reach the Bond Button easily. First, set up your Green List: add all of the transmitters you'll want to use. Then 4-click the  Bond Button to enter Red Mode. Now put the receiver up on the high shelf. Power on just one of your transmitters and power off all others. The receiver automatically bonds to the transmitter that's on.
How do I delete a transmitter from my Green List?	Factory Reset (6 Clicks of the Bond Button) clears the Green List and lets you start over from scratch. If however, you'd like to delete just one transmitter from your Green List, first bond your receiver to the transmitter you wish to delete. See the section above: How do I bond with a specific Green transmitter? . Once you are bonded to it, hold down the  Bond Button for a few seconds until you see the Indicator flash Red –this Red flash means the transmitter has been deleted.
What is a Cluster?	Clusters are an optional convenience for “power users”. A Cluster is several SKAA receivers behaving as one product. A left & right speaker pair, for example, or a sound bar and subwoofer.
What is the Master receiver?	In any Cluster, there is a single Master receiver, and all of the other receivers in the Cluster follow its behaviour. You can control the entire Cluster by operating the  Bond Button of the Master. A receiver must have a physical Bond Button in order to become the Master.
How do I “uncluster” several receivers?	Do the Make a Cluster of Receivers procedure once for each receiver, but omit Step 3. Do them one at a time. This gives each of the receivers a functioning  Bond Button, and each of them will thereafter operate independently.
What are some tips for making Clusters?	Each step in the Make a Cluster of Receivers procedure has a 10-second time limit. When you see the Master's Indicator start to flash Red, you have 10 seconds to power on the next receiver. When that receiver's Indicator starts to flash Red, you have 10 more seconds to power on the next one, and so on.
Why does only one of my Bond Buttons work?	When you make a Cluster from several receivers, the first one powered on in the Make a Cluster of Receivers procedure becomes the Master of the Cluster. Only the Master's  Bond Button works because a Cluster uses just one Green List –the Master's Green List. The Bond Button of each of the other receivers will work only for the Mute / Unmute function (3-Click of the Bond Button).
Can any group of receivers be made into a Cluster?	No. The receivers must be members of the same product family. If they are not, the Make a Cluster of Receivers procedure won't work. This is because only receivers which were designed to work together (as a single product) can be made into a Cluster.

Important Information

Read the following information carefully. Failure to follow these safety guidelines may result in personal injury or user dissatisfaction.

1. Use the monkey grip handles cut into the top/rear plywood wall to lift your DFA safely.
2. Do NOT poke the woofers. They don't like it.
3. Never place anything into DFA's tuned port.
4. Only use the provided Brick Power Supply for charging your DFAs. If you're charging both DFAs at the same time using the included Y cable, do so with the DFAs turned off (not playing audio).
5. Never store or operate DFAs near a heat source.
6. Do not charge DFAs during electrical storms.
7. If you're always using a DFA with its Brick Power Supply plugged in, make a point of running it on its battery at least once a month. Down to 3 LEDs on the fuel gauge is enough. This will extend battery life.
8. Listening to one or more DFAs at maximum volume may lead to hearing loss or partial hearing loss. We do not recommend listening with volume over 80% within 4 meters of your DFA(s).
9. Not for use by children under the age of 12.
10. Any disassembly of your Death from Above speaker will void your warranty.
11. When using DFA with poles and tripods, use only 1-3/8" steel poles from a brand you trust. Dillinger Labs has a really nice pole for a good price. See SKAAstore.com for details.

This Owner's Manual is being continuously improved with the most up-to-date and accurate information on DFA. Please check our [website](#) for the most recent version.

Have questions or comments about Dillinger Labs products? We want to hear from you! Reach out to us [here](#).

Check out SKAA's [YouTube channel](#) for great how-to vids.

Setting up a Soundboks Hub with DFA Satellites

Hub speaker

Click the  button to set Soundboks' mode to:

Host

In this mode the Soundboks will act as a SKAA Transmitter (what we call a Hub speaker) relaying its own audio to up to 4 additional Satellite Speakers (for a total of up to 5 speakers)

Double click the  Bond Button on your DFA speakers to Bond them to the Soundboks Hub. The DFAs are now satellites to the Soundboks Hub.

SKAA or SKAA Pro operation

- Use the Soundboks App on your phone to set your Hub speaker (Soundboks speaker in Host mode) to SKAA or SKAA Pro mode (all downstream Bonded speakers will automatically follow the mode of the Hub)
- SKAA mode – Bond up to 4 more speakers at standard low latency (for a total of 5 speakers in the SKAA cell)
- SKAA Pro mode – Bond up to 2 more speakers at ultra-low latency (for a total of 3 speakers in the SKAA cell)

Soundboks speaker models

- All of the following Soundboks speakers will work for the use cases described in "The Sweet Hookups" section of this manual:
- Soundboks 3
- Soundboks Go (will support all those use cases that do not depend on combo [XLR/TRS] jacks)
- Soundboks 4
- Soundboks speakers support all use cases except those involving K mode


Setting up a Wet Sounds Portable Hub (model WS-L) with DFA Satellites

Hub speaker



Click the  button on your WS-L to set its mode to Bluetooth Relay (WS-L has 3 modes, so this may take more than one click);

both the Bluetooth icon and the Relay icon must be lit up:



In this mode the WS-L acts as a SKAA Transmitter (what we call a Hub speaker) relaying its own audio to up to 4 additional Satellite Speakers (for a total of up to 5 speakers)

Double click the  Bond Button on your DFA speakers to Bond them to the WS-L Hub. Your DFAs are now Satellites to the WS-L Hub.

Supported Use Cases

- The Wet Sounds Portable model WS-L speaker supports all uses cases shown in this manual which do not require wired audio input to the Hub speaker
- The Wet Sounds Portable model WS-L speaker supports all uses cases which do not require the Hub speaker transmitting in SKAA Pro mode (note the WS-L *does* support SKAA Pro mode when it is operating as a SKAA Receiver)
- The Wet Sounds Portable model WS-L speaker supports all K-mode use cases

Setting up an Electrotec Stage One with DFA Satellites

Hub speaker

Click the  power/gear button on your Electrotec Stage One speaker to set its mode to Bluetooth Relay or Aux Relay mode (Stage One has 4 operating modes so this may take more than one click):



The Relay icon to the left of these LEDs means that in these two modes, the Stage One speaker acts as a SKAA Transmitter (making the Stage One into we call a Hub speaker) relaying its own audio to up to 4 additional Satellite Speakers (for a total of up to 5 speakers)

Double click the  Bond Button on your DFA speakers to Bond them to the Stage One Hub. Your DFAs are now Satellites to the Stage One Hub.


SKAA or SKAA Pro operation

- Triple click the Power/Gear button on Stage One to change between SKAA (power LED = white) and SKAA Pro (power LED = red)
- SKAA mode – Bond up to 4 more speakers at standard low latency (for a total of 5 speakers in the SKAA cell)
- SKAA Pro mode – Bond up to 2 more speakers at ultra-low latency (for a total of 3 speakers in the SKAA cell)

Supported Use Cases

- Stage One supports all use cases shown in “The Sweet Hookups”


Hub speakers have SKAA Transmitters built in

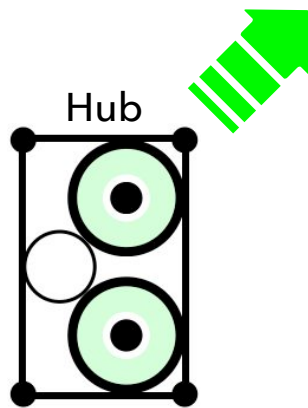

For example:

- Soundboks 3 (in Host mode)
- Soundboks 4 (in Host mode)
- Soundboks Go (in Host mode)
- Wet Sounds Portable (in Bluetooth Relay mode)
- Electrotec Stage One (in Bluetooth Relay mode)
- Electrotec Stage One (in Aux Relay mode)
- Plus others
- Check models to find out what inputs are supported


and you can always cook your own Hub ...

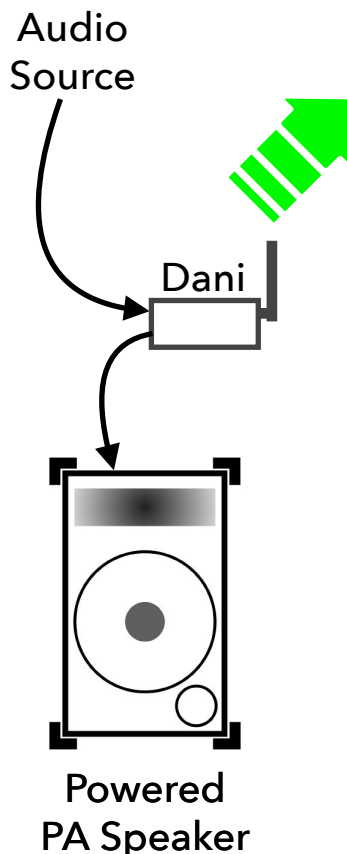

The do-it-yourself Hub:

- Use any powered PA speaker (Mackie, EV, QSC, JBL, etc.)
- Add a Dani SKAA/SKAA Pro Transmitter
- Daisy chain your audio source into Dani's inputs and then out from Dani's thrus to the PA speaker (use TRS patch cables)
- Enables you to both hear the audio and transmit it to up to 4 Satellites
- Not as good as a speaker with SKAA Hub function built in (Soundboks 3, 4 and Go all have it built in) because:
- Bluetooth input not supported
- There's no latency compensation to exactly time align the wired speaker with the wireless ones

Satellite speakers have SKAA Receivers built in

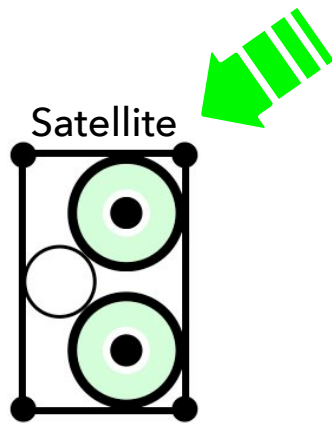


For example:

- Soundboks 3 (in Join mode)
- Soundboks 4 (in Join mode)
- Soundboks Go (in Join mode)
- DFA is a satellite speaker (always a SKAA Receiver)
- DFB is a satellite speaker (always a SKAA Receiver)
- Electrotec Stage One (in SKAA mode)
- Wet Sounds Portable (model WS-L in SKAA mode)

- And many others

and you can always grow your own Satellite ...

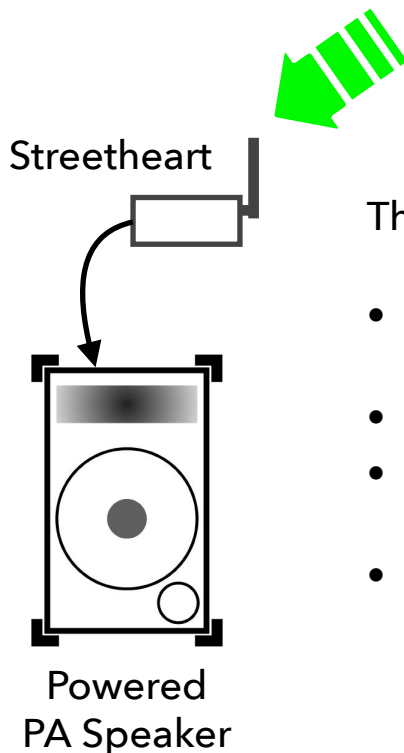

The do-it-yourself Satellite:

- Use any powered PA speaker (Mackie, EV, QSC, JBL, etc.)
- Add a Streetheart SKAA/SKAA Pro Receiver
- Connect Streetheart's outputs to the PA speaker using 2 TRS patch cables
- Not quite as slick as a speaker with SKAA receive capability built in (Soundboks 3, 4 and Go all have this built in)

The Sweet Hookups


- Here are a few ideas for how you can use your new DFAs and how they can network seamlessly with the rapidly growing ecosystem of SKAA-based products from Dillinger Labs, Soundboks, Wet Sounds, Electrotec, Cerwin Vega, Trulli and other great brands
- Think of each of these as an idea; some inspiration, or a starting point you can add to or subtract from as you wish

Legend


- SKAA
- SKAA Pro
- bluetooth
- wire

Mode	Receivers	Latency
SKAA	4	36 ms
SKAA Pro	2	19 ms


DFA: always a SKAA Receiver (ie. a Satellite)




SKAA Speaker
(Hub or Satellite)



SKAA Speaker
(Hub or Satellite)




any powered
speaker

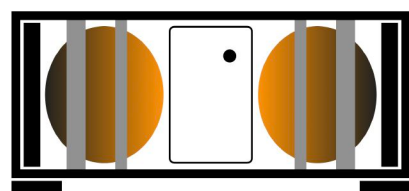


SKAA
subwoofer
(DFB or other)

SKAA Transmitter

SKAA Pro
Transmitter or
Receiver



any
mixer



SKAA
mixer




Sweet Hookups ... Contents

Hookups	Category
1 - 26	Pro DJ
27 - 48	Music & Party
49 - 58	Deckless DJ
59 - 72	Studio & Recording
73 - 94	PA & Live Sound
95 - 130	Movies, TV, Social Media & Games
131 - 152	Talk and Sing with Mics
153 - 190	Instruments & Jams
191 - 200	Creator
201 - 214	Yard & Pool

Pro DJ


1

running ceremony music...

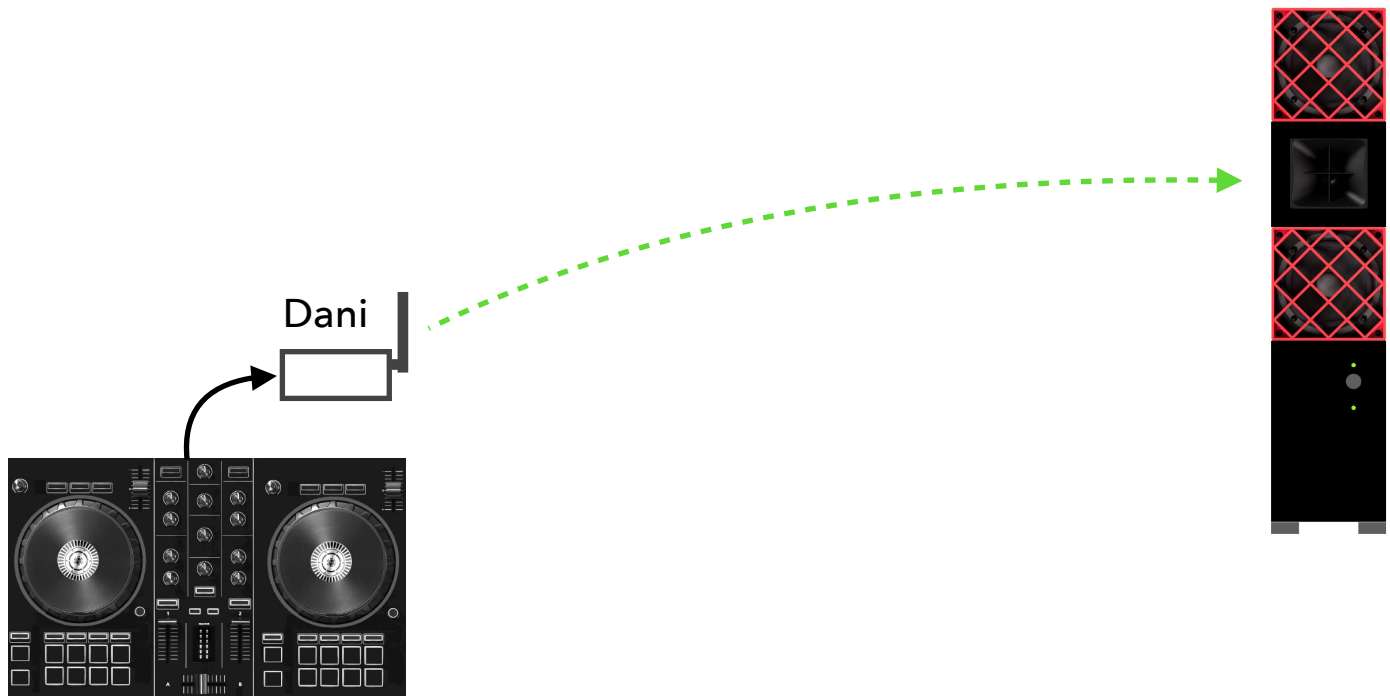


2

... and if that walkway is REALLY long

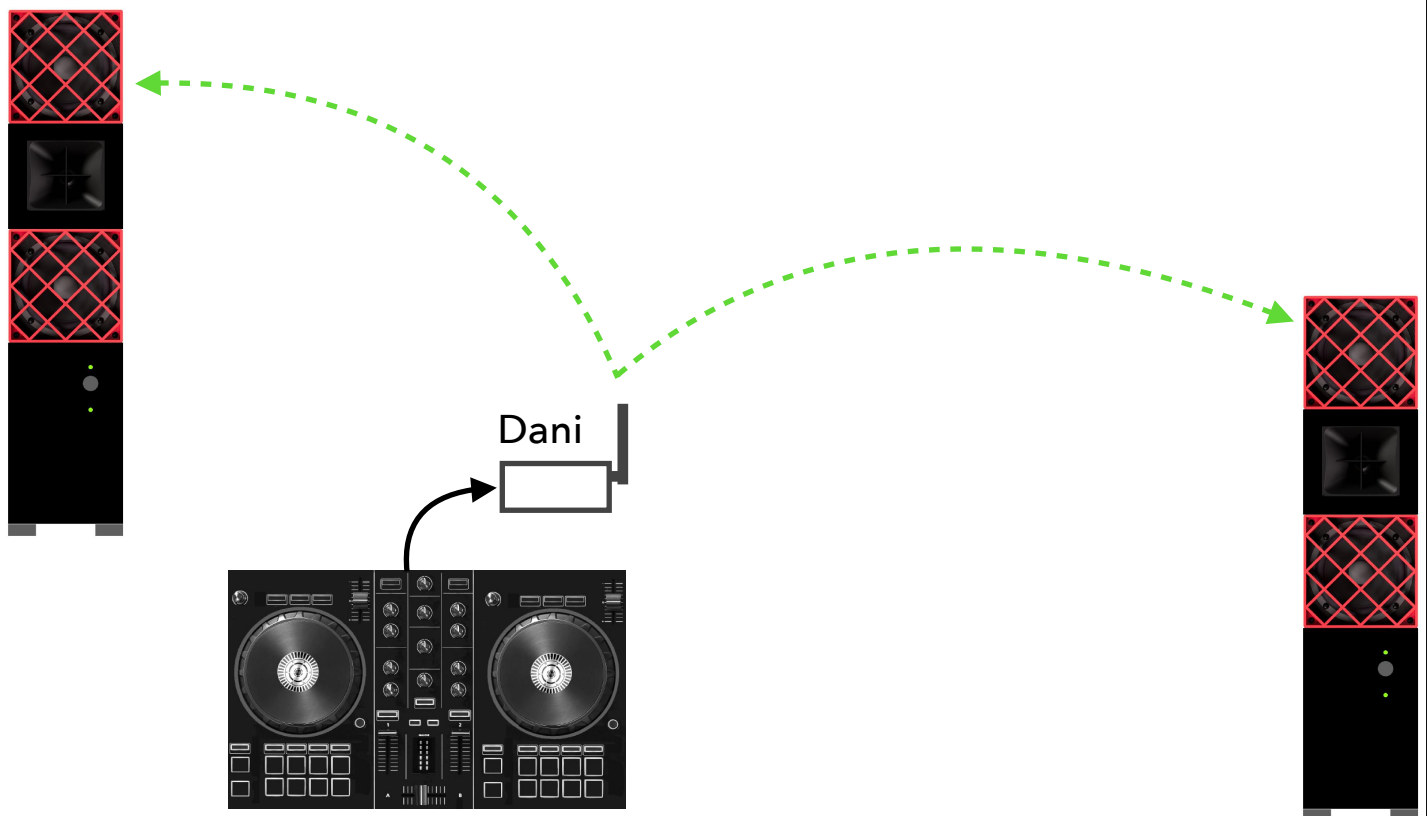


3

ultra low latency DJ

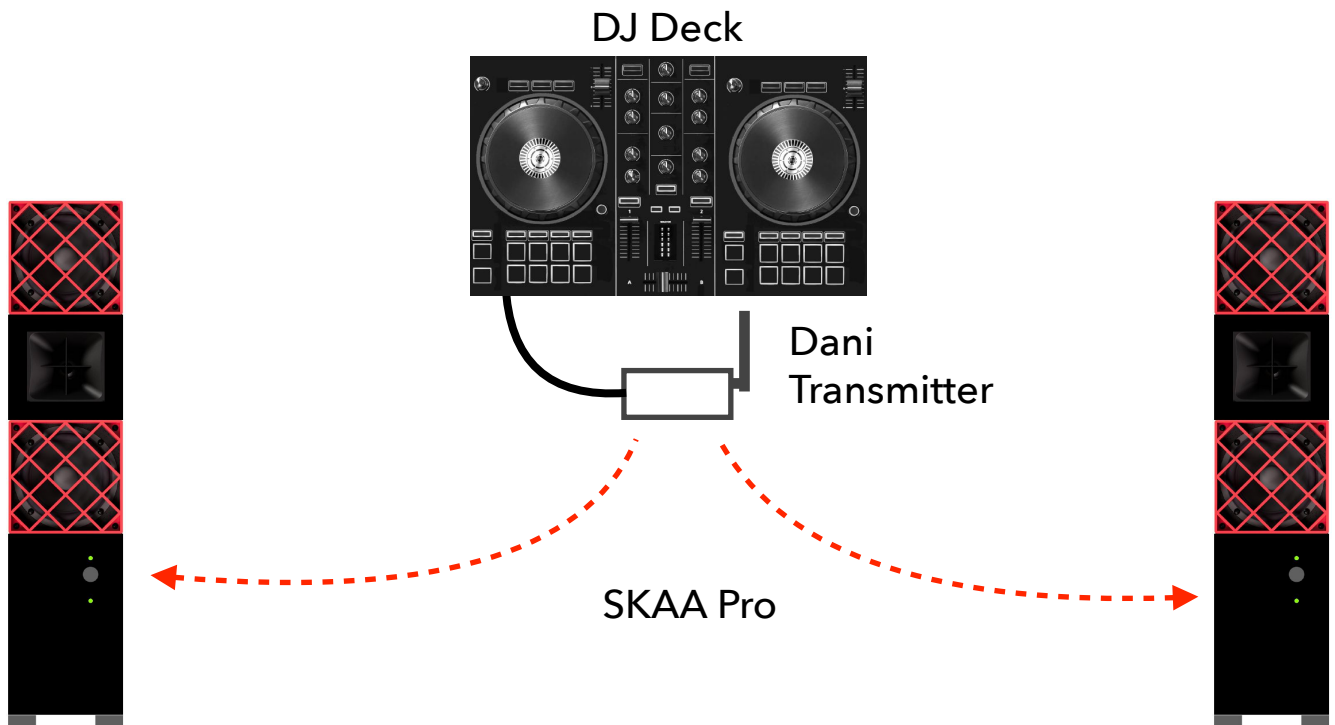


4

four tower DJ

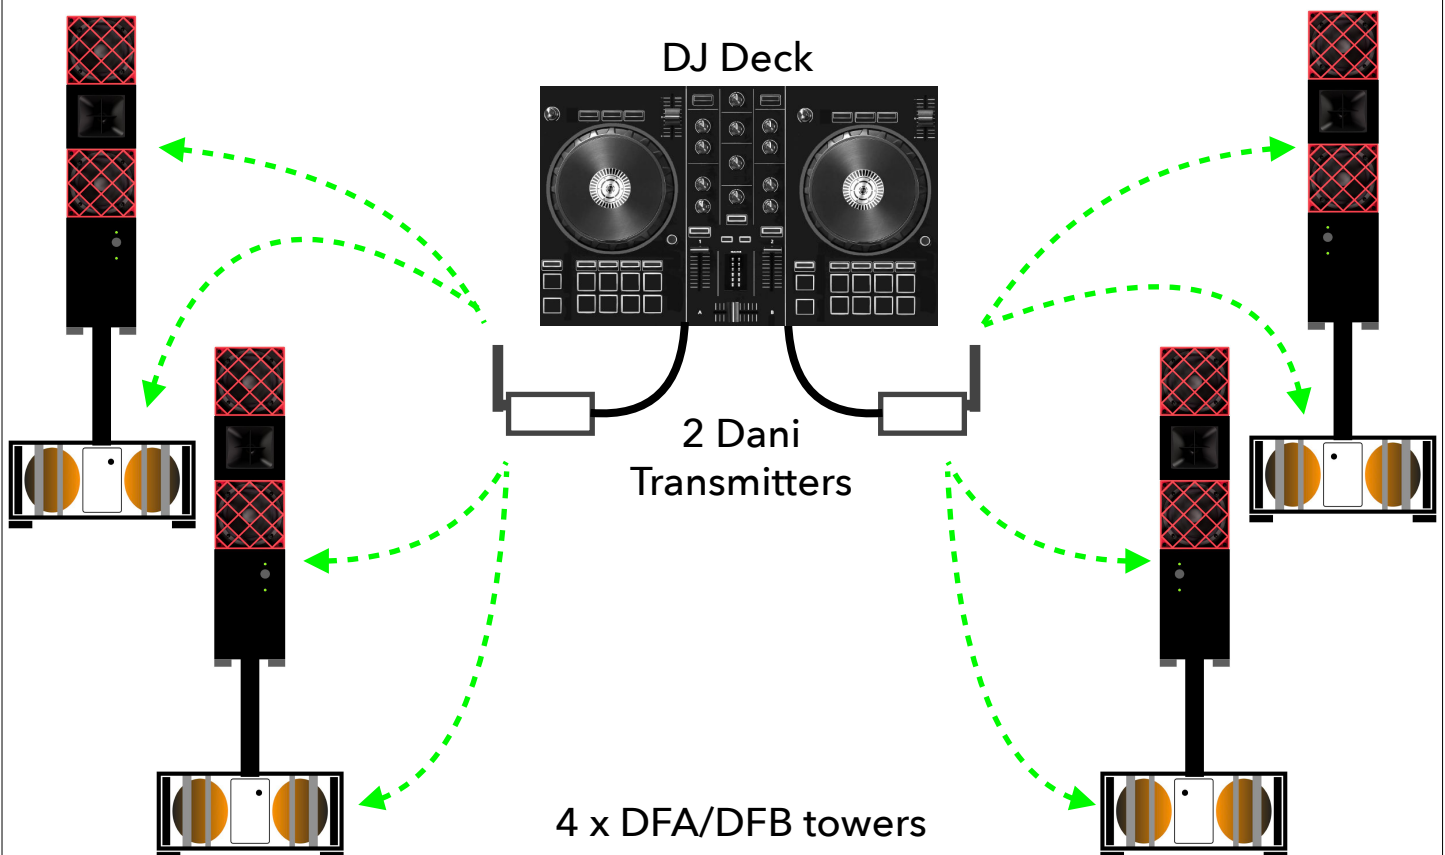

5


pro wireless DJ

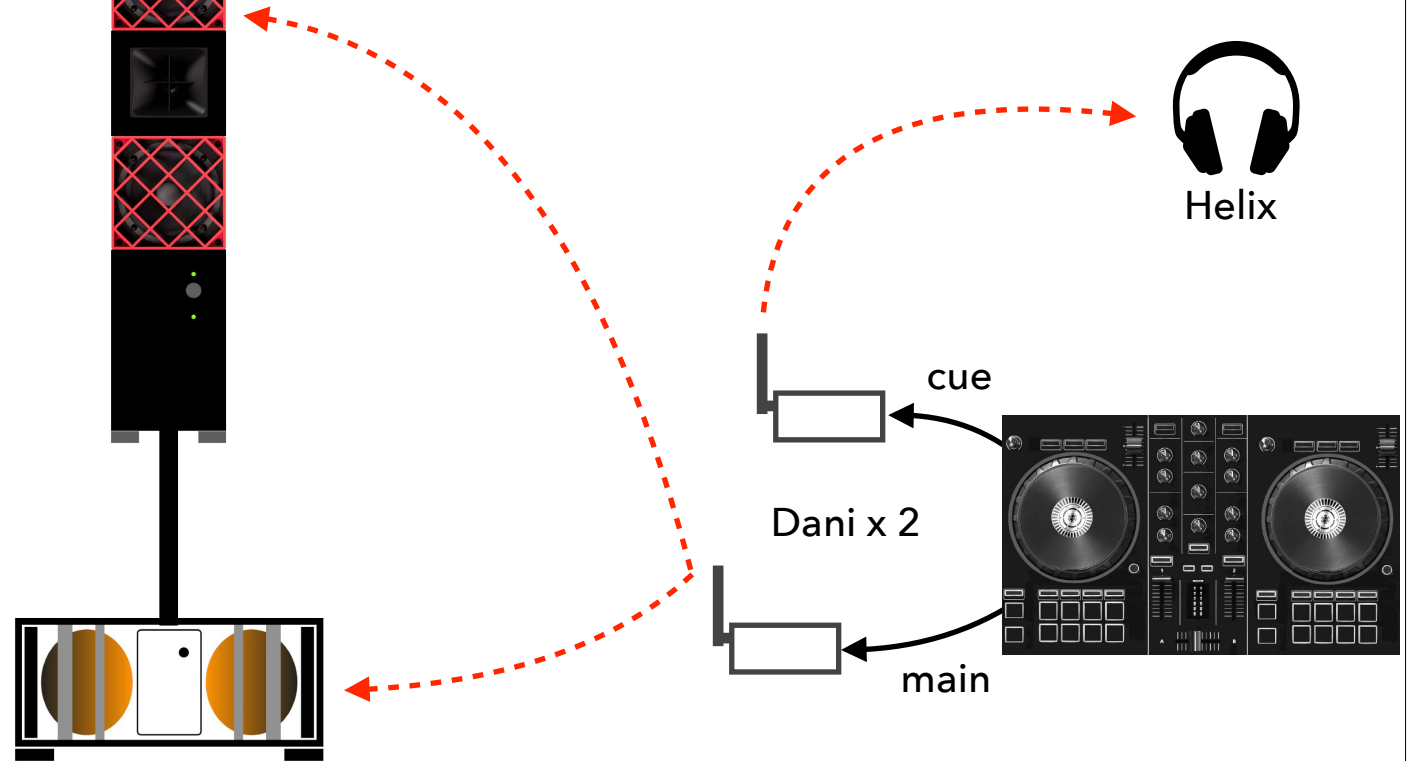

Death from Below


6

dude, I brought my flash drive

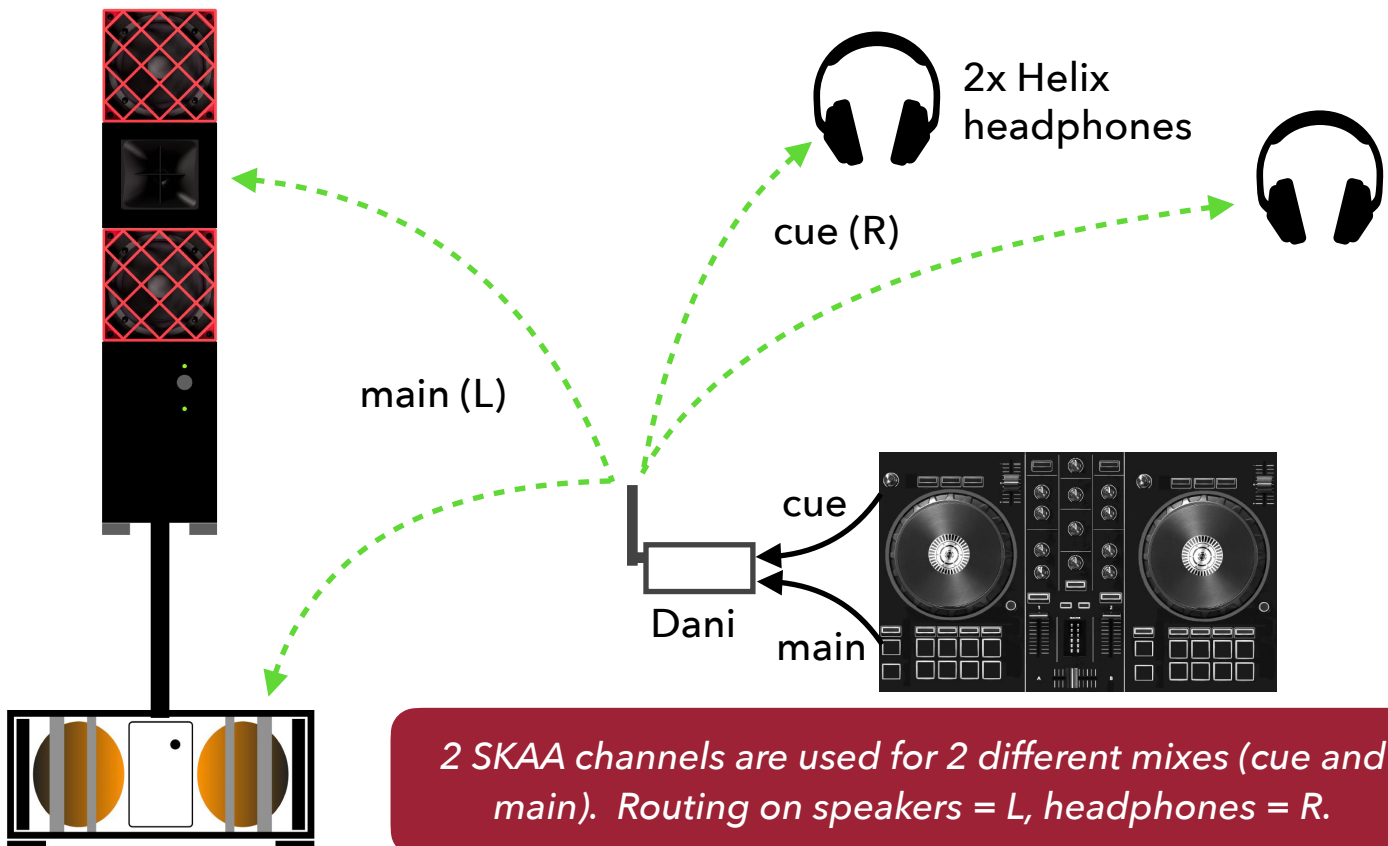


2 SKAA channels are used for 2 different mixes (cue and main). Routing on speakers = L, headphones = R.

7

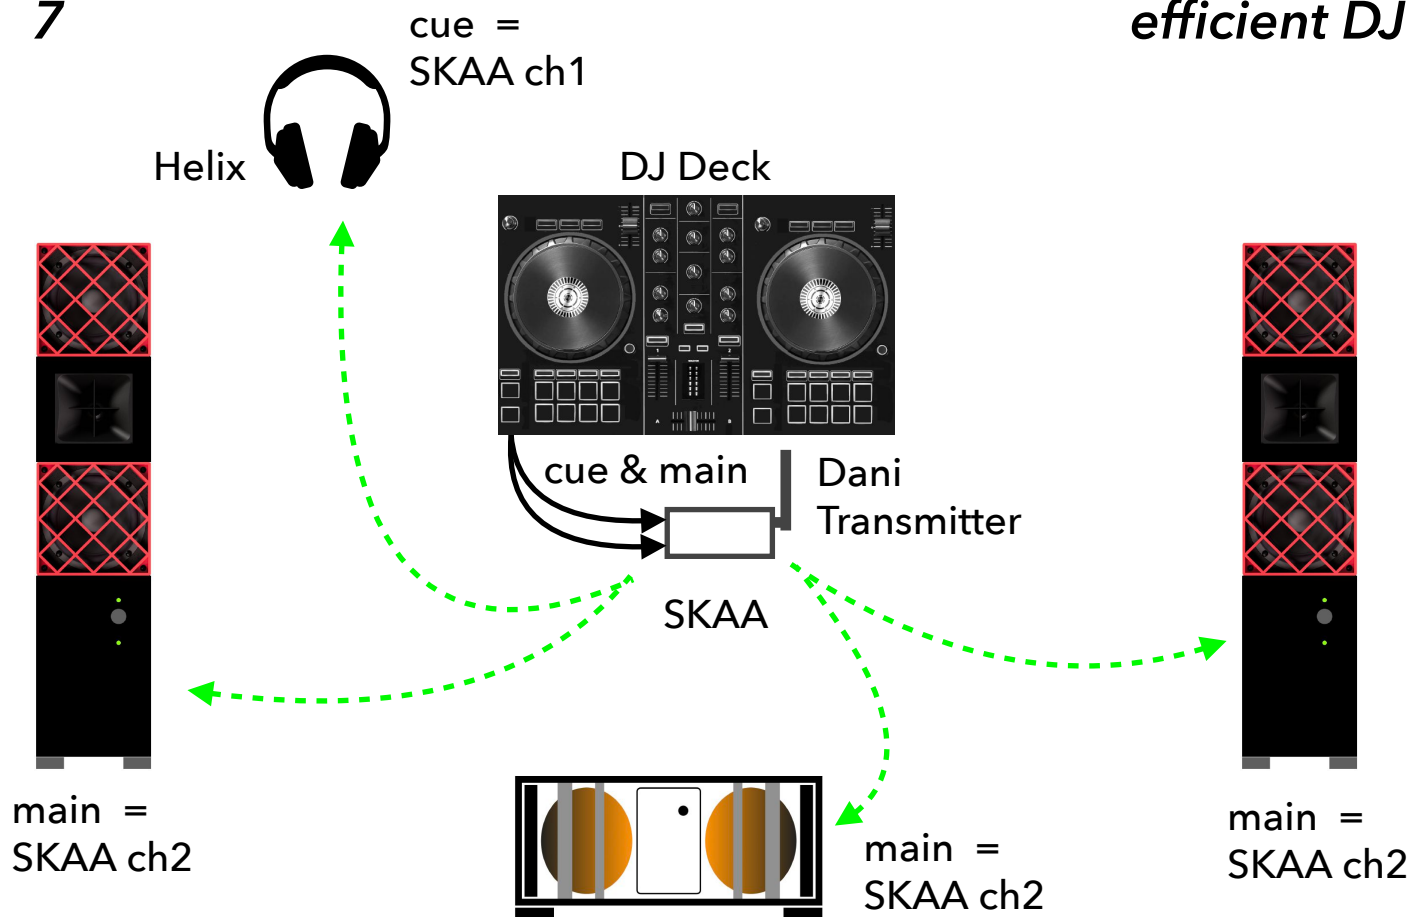efficient DJ


8

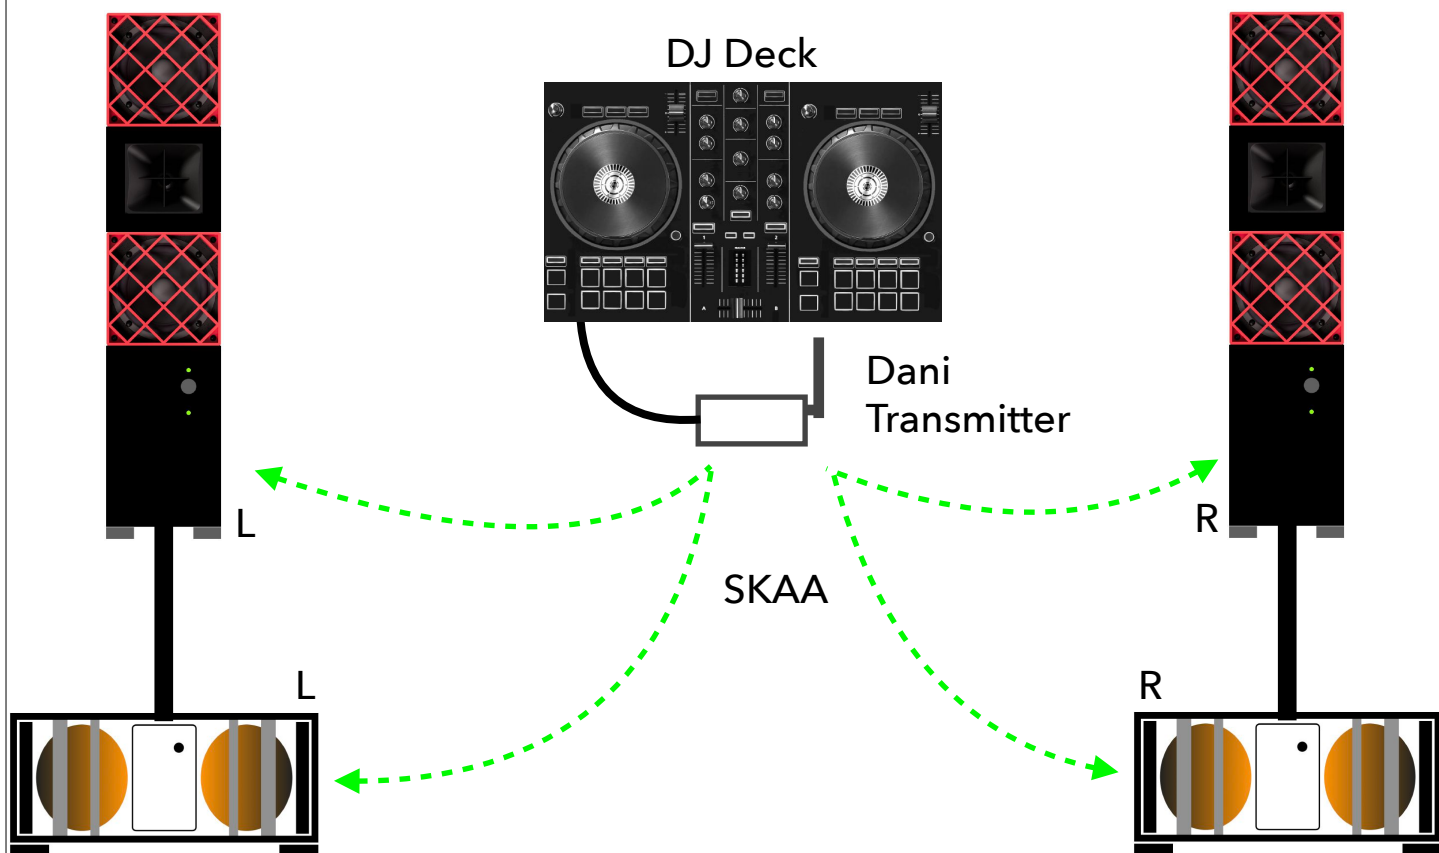dope stereo wireless DJ

9


quakin' the dance floor

combining SKAA and SKAA Pro like this is handy when you want the treble to hit before the bass – and you can tighten up the difference to 6 ms by selecting Time Align setting 5 on the DFAs

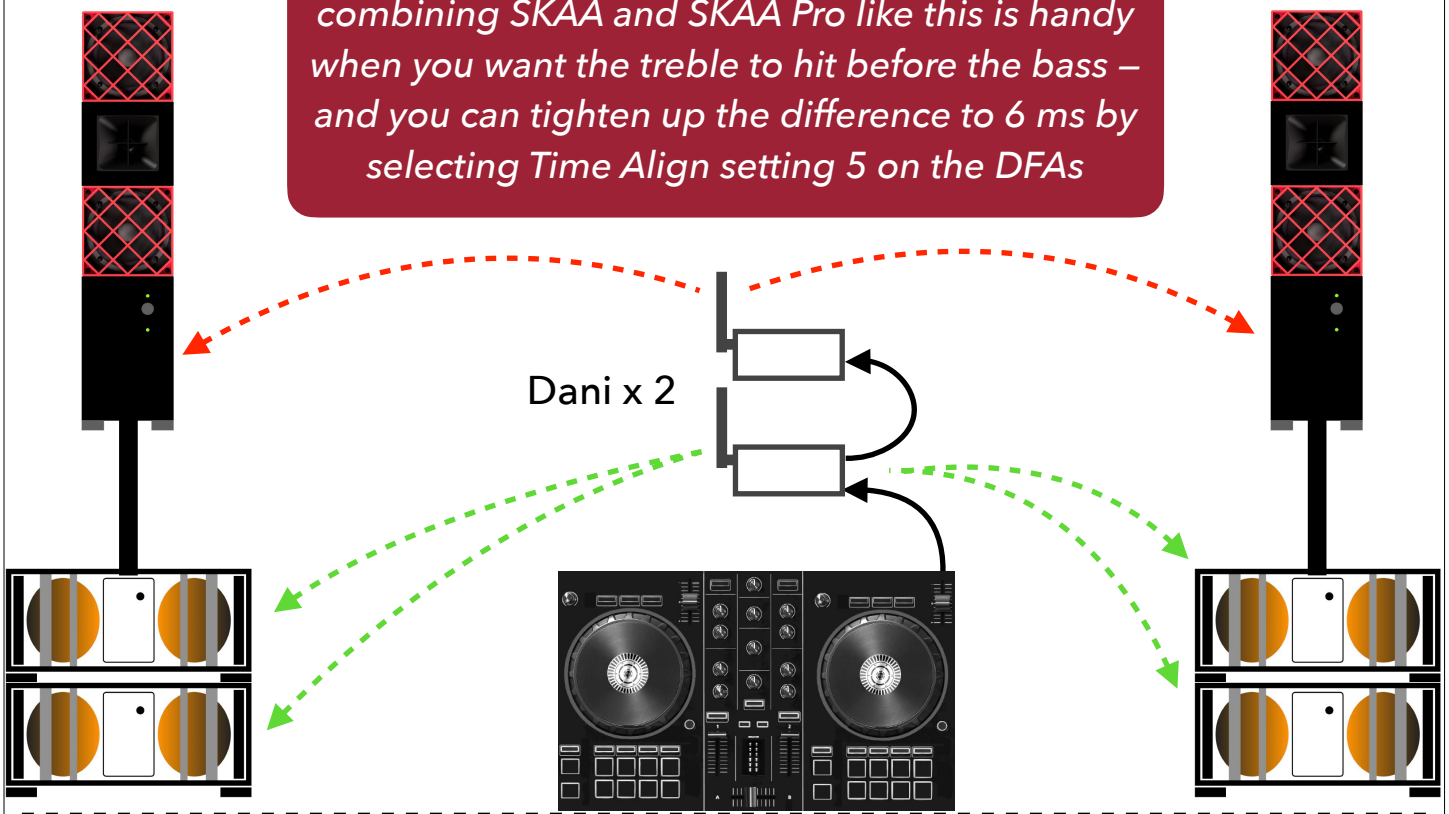


10

add some booth monitors

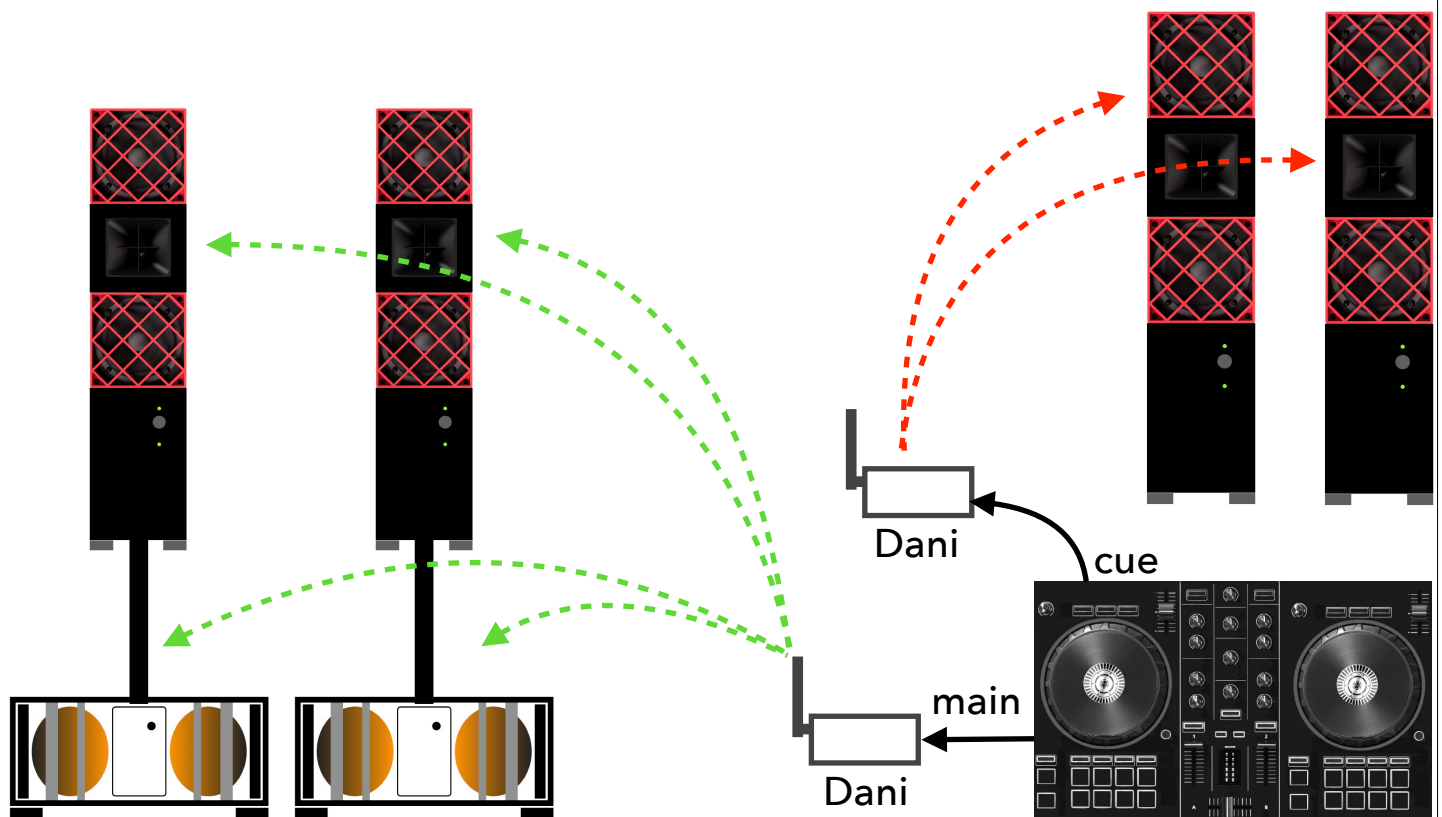


11

insane coverage

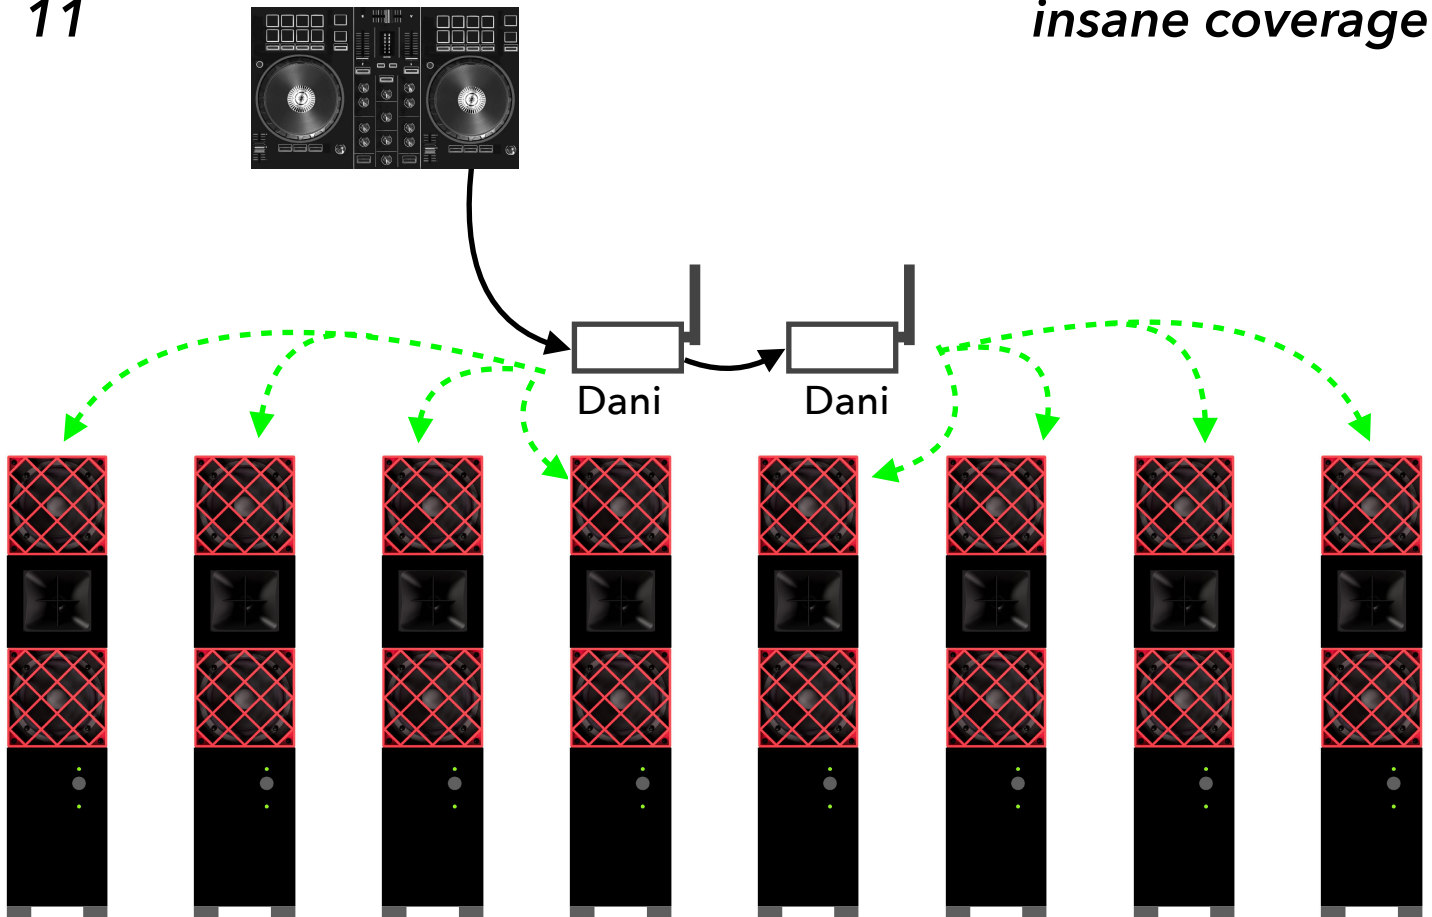


12


low latency, insane coverage

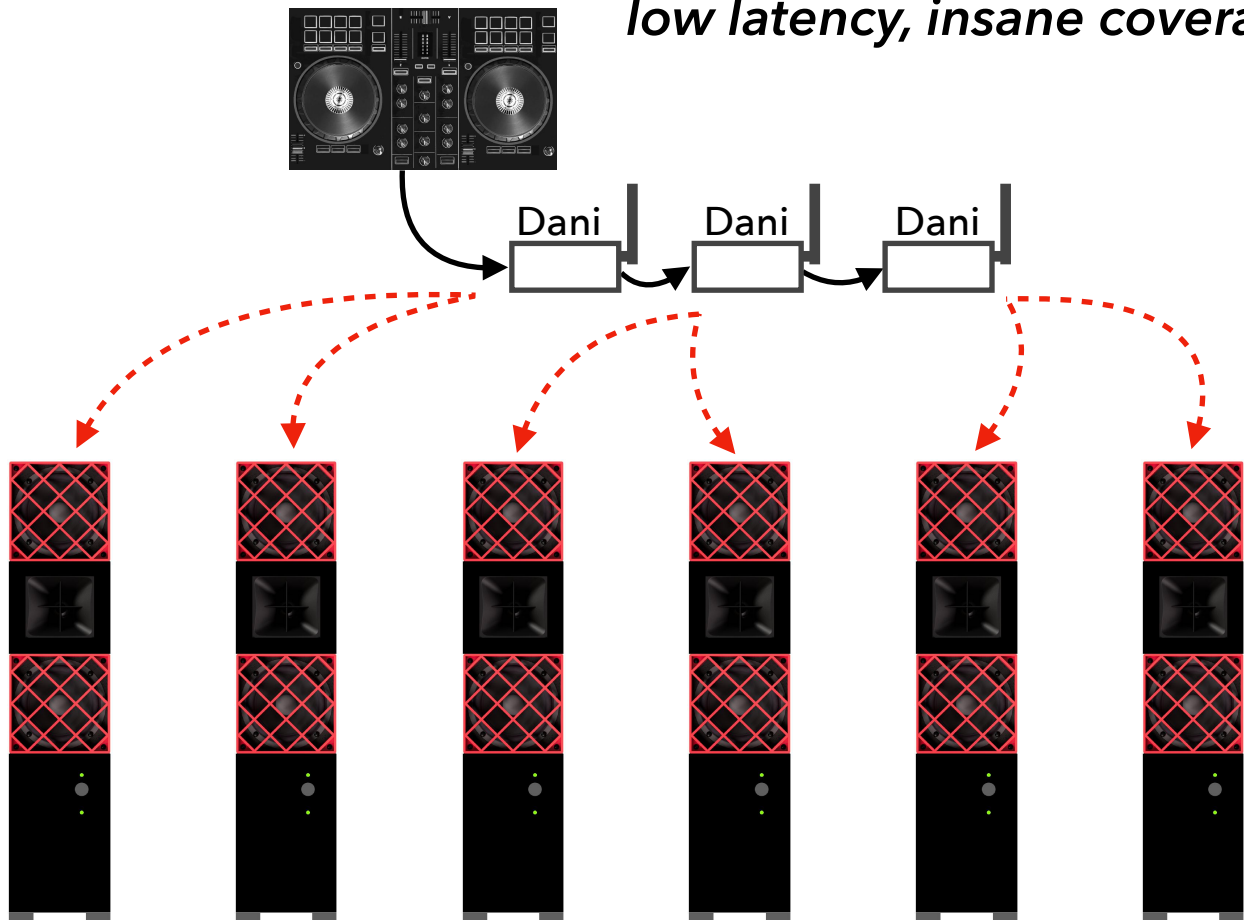

13

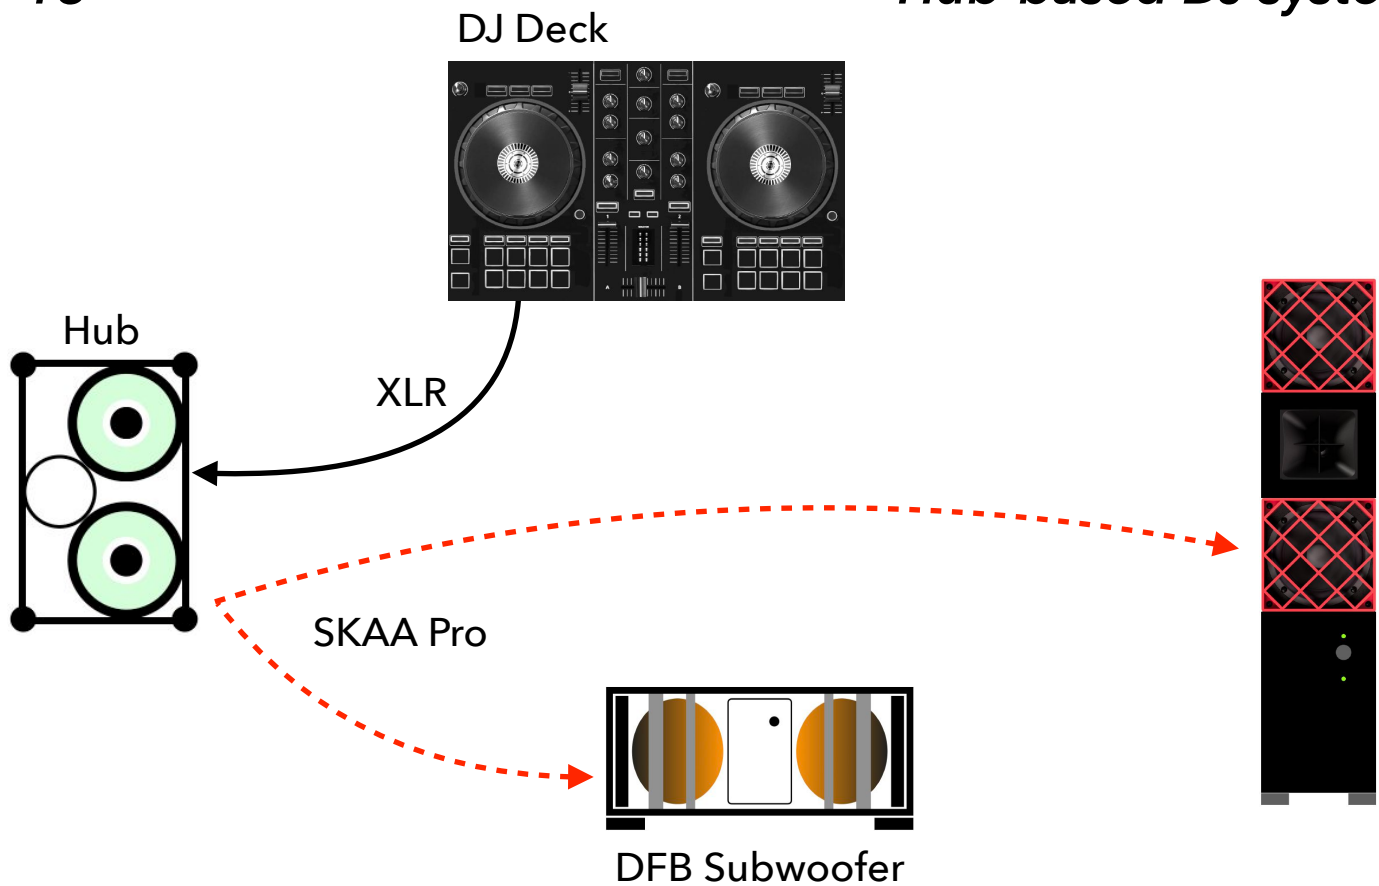
Hub-based DJ system

14

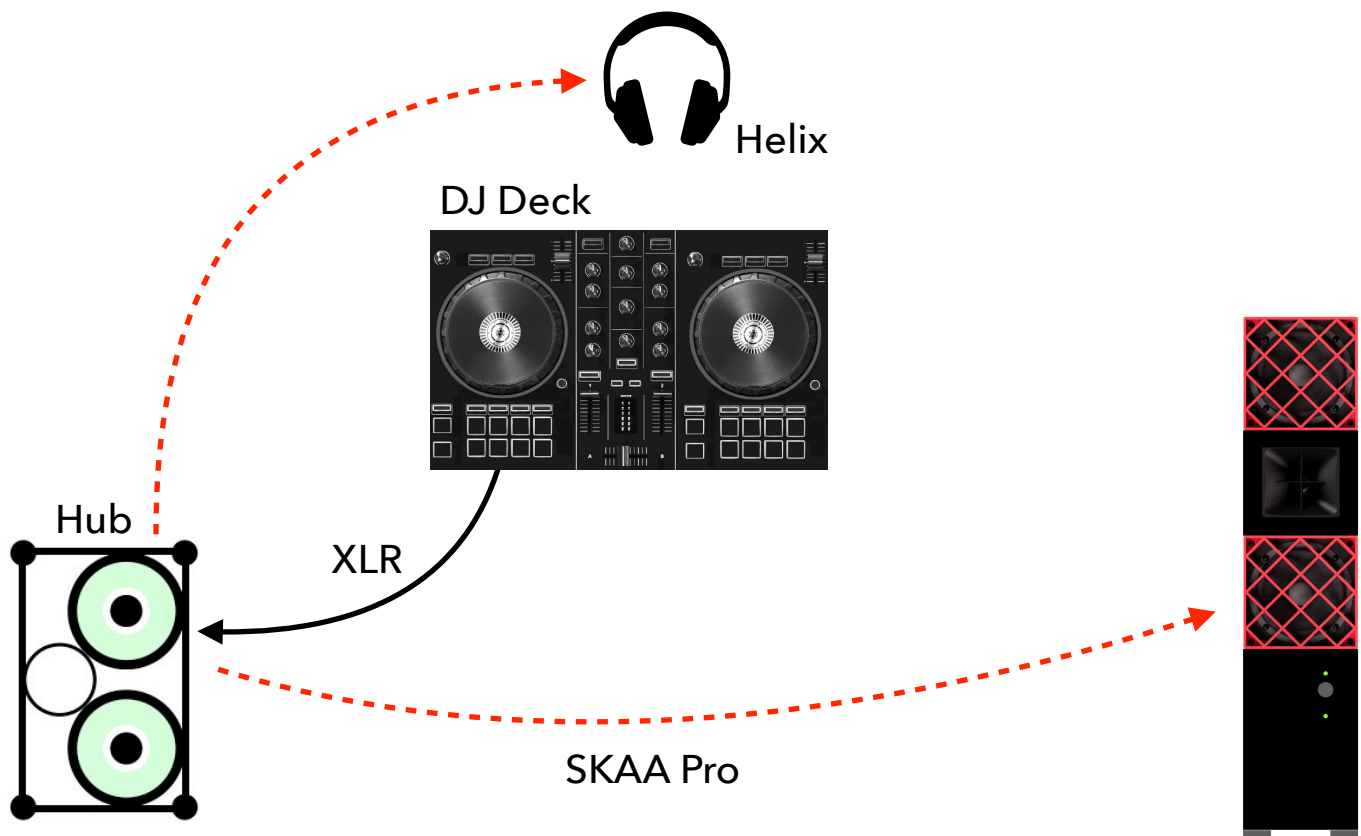... with SKAA headphones


15

5-piece Hub DJ system

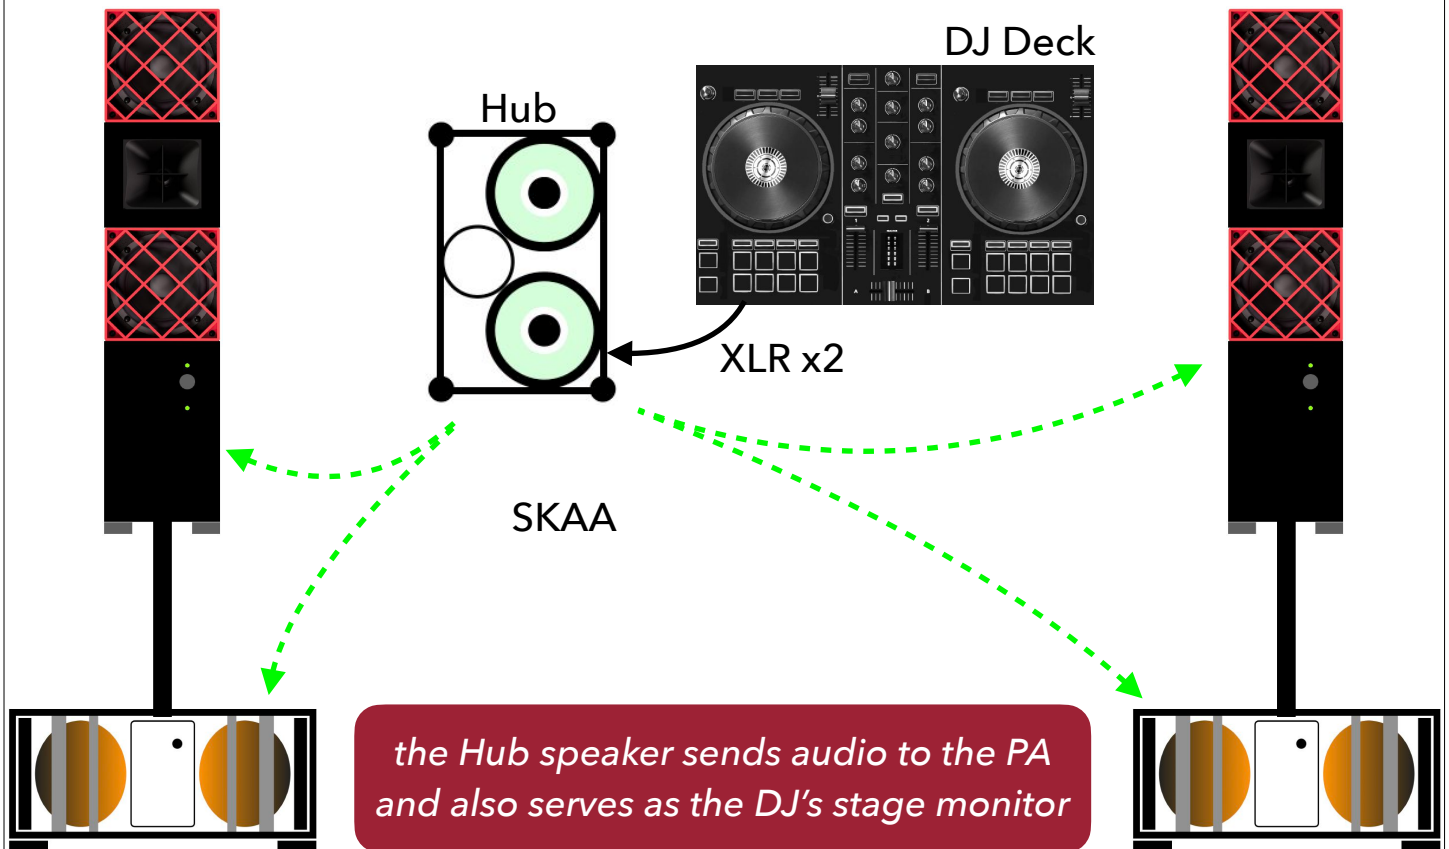


16

... pro pro fully-wireless DJ

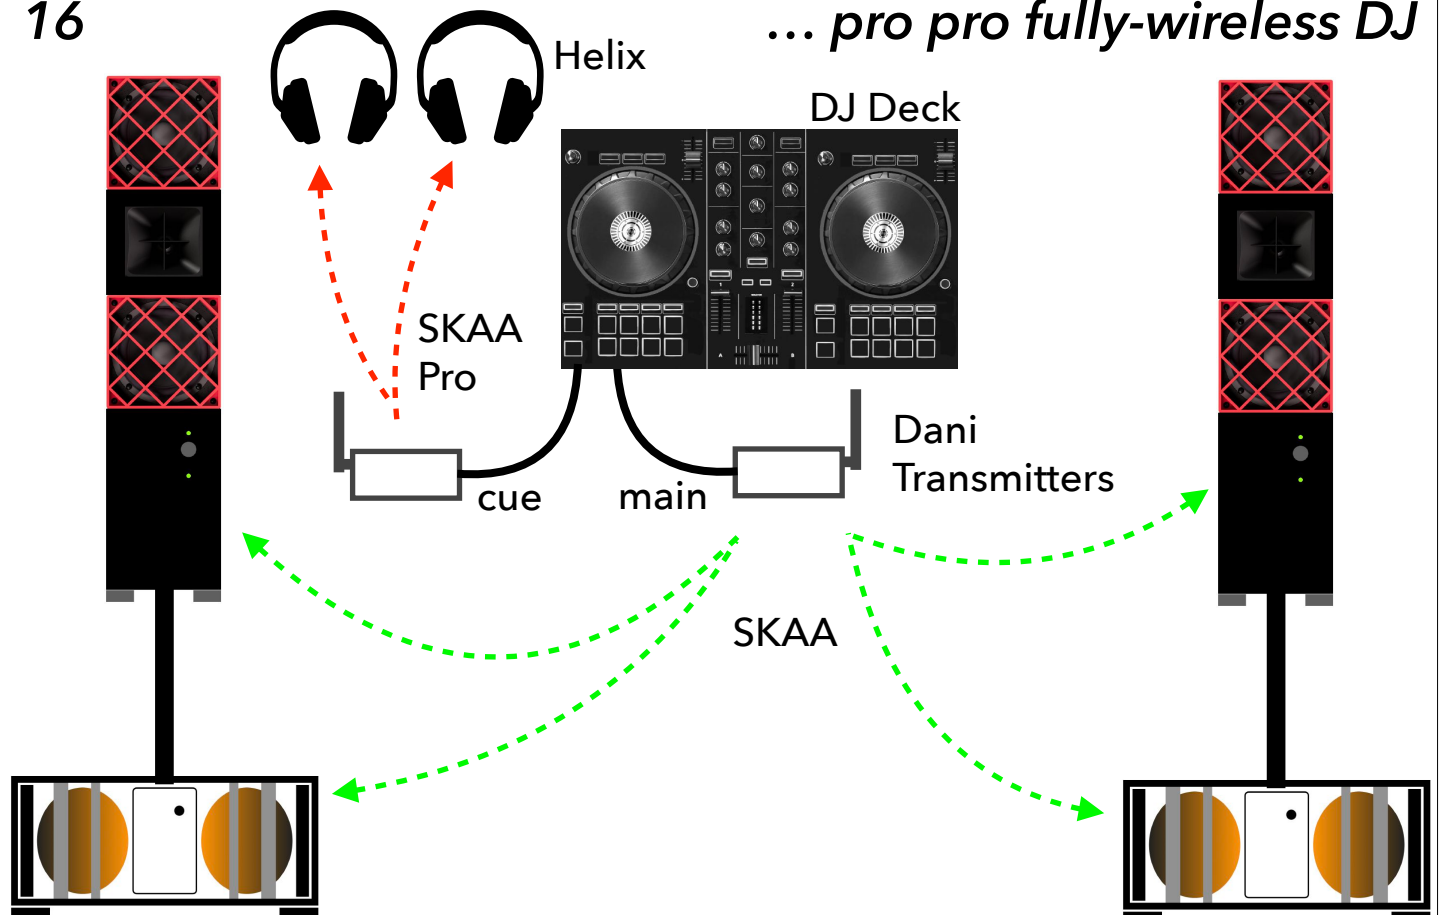


17

ultra low latency towers I

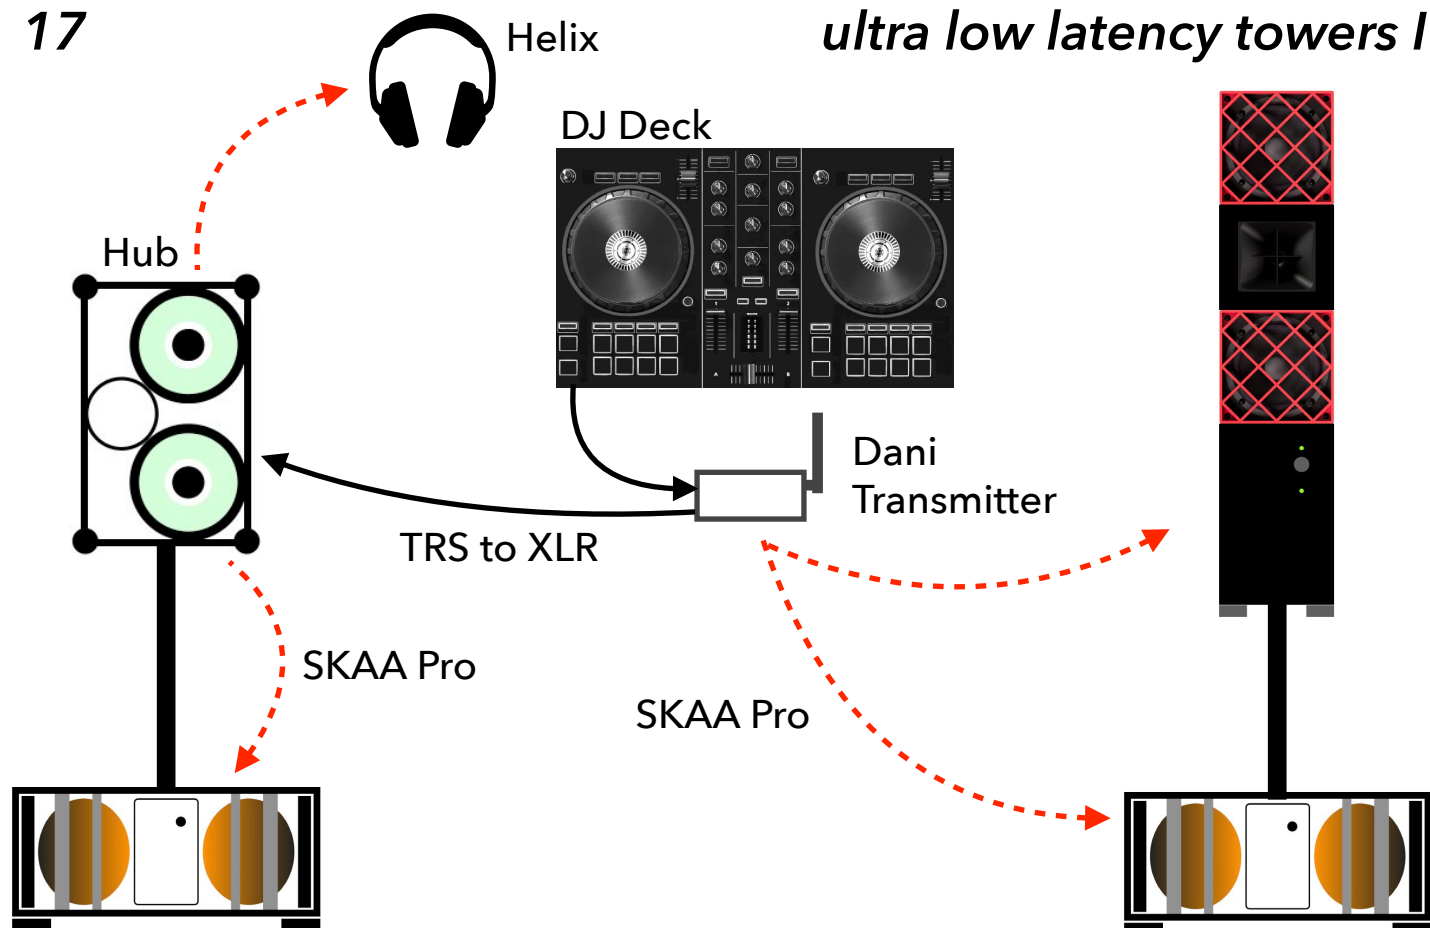


18

ultra low latency towers II

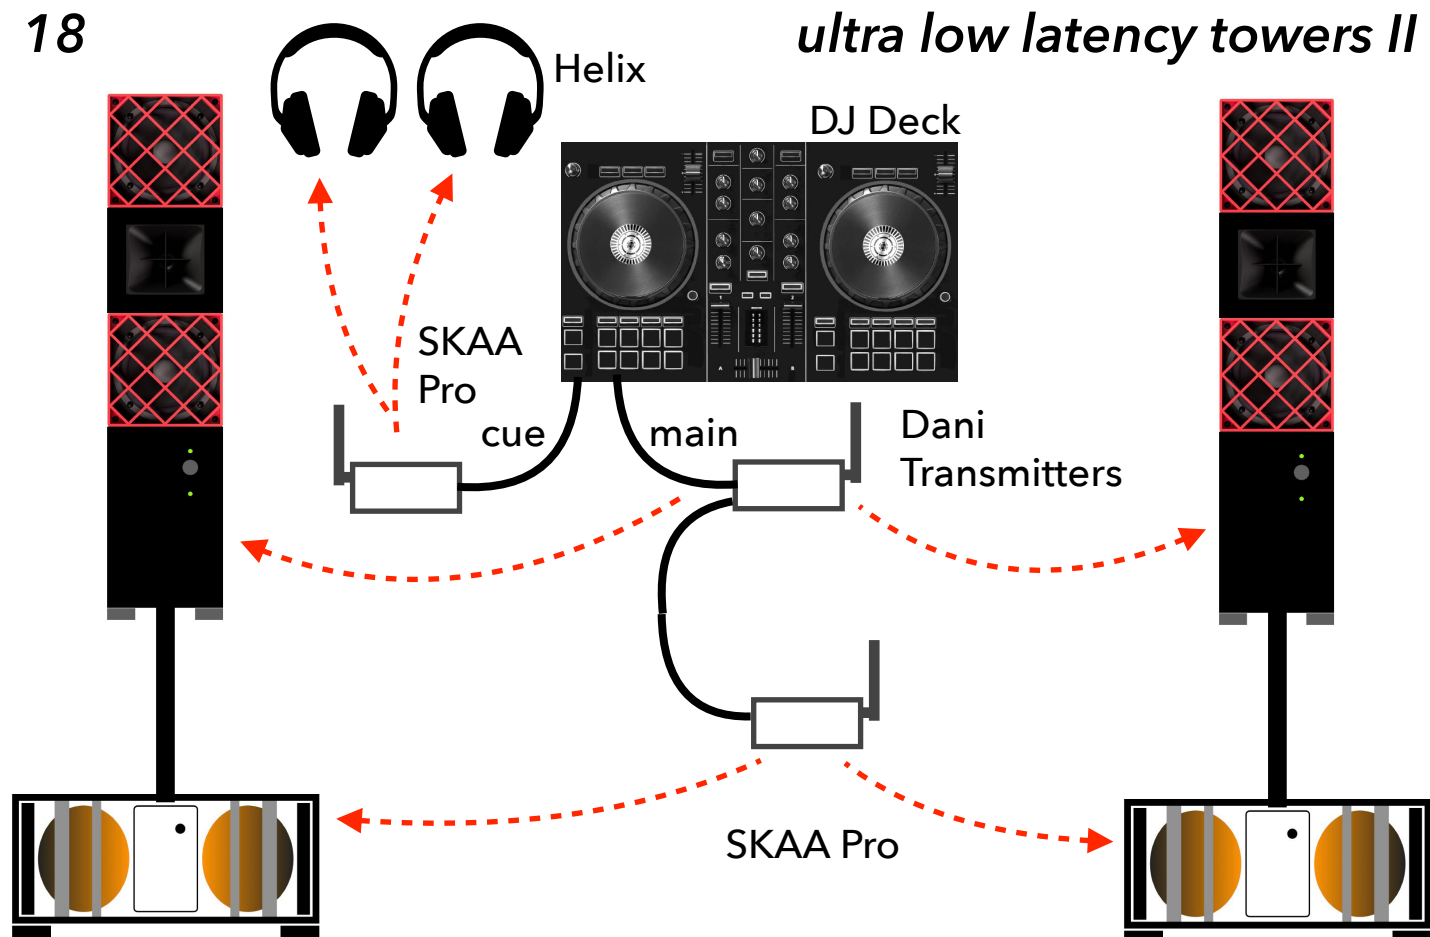


19

separate bass DJ

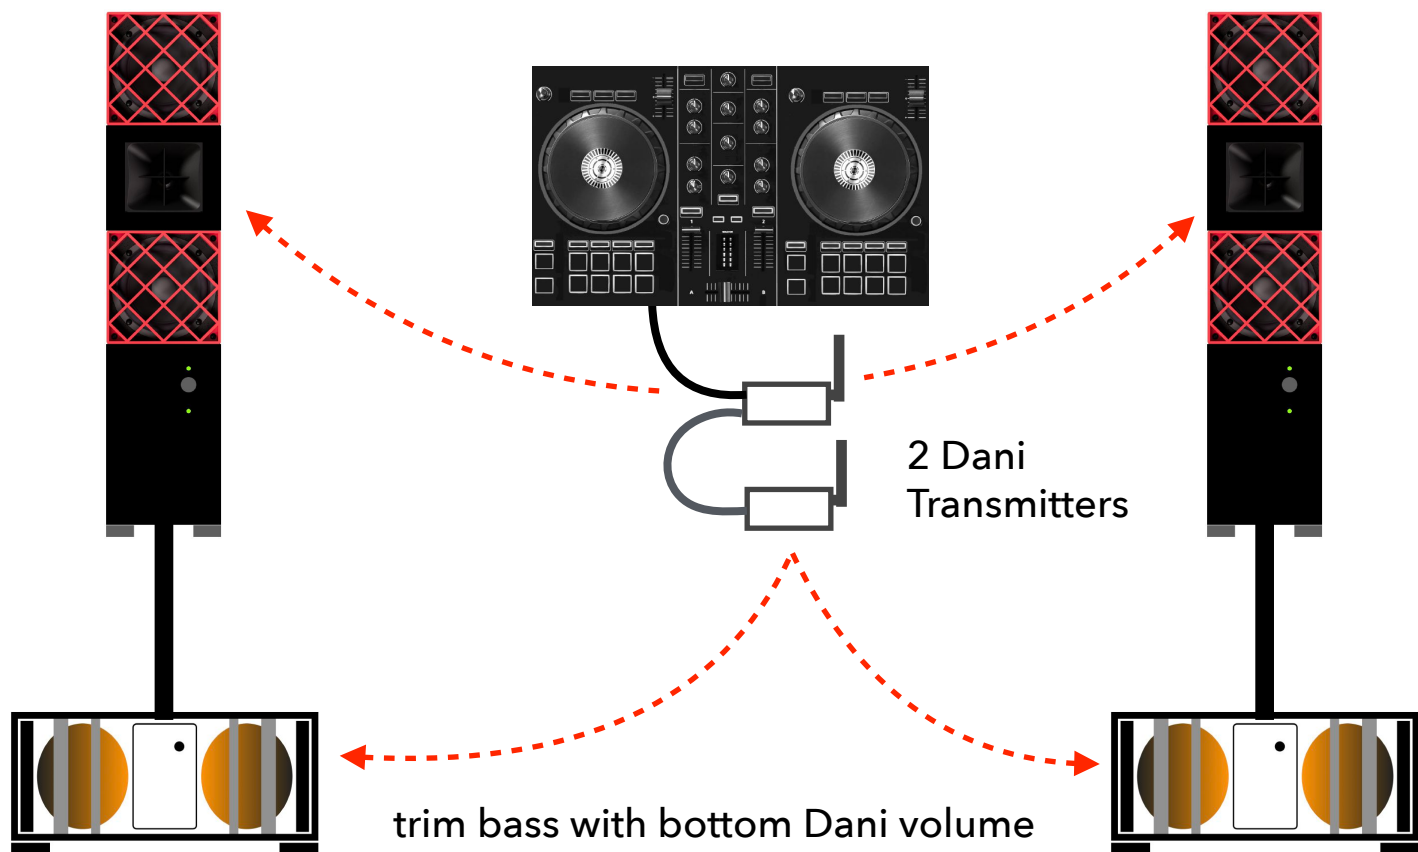


20

big bottom DJ

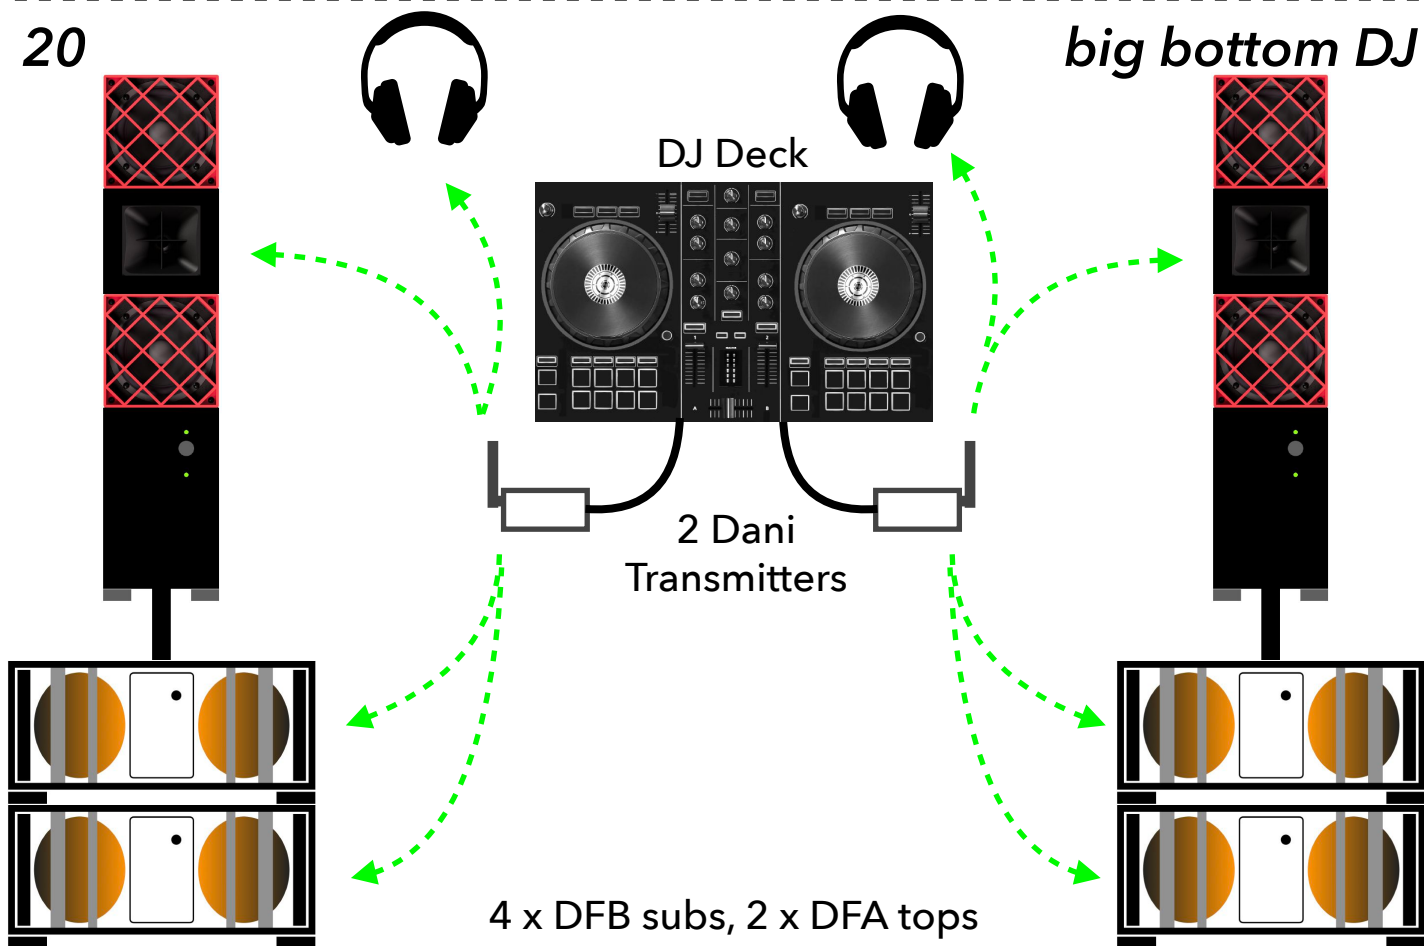


21

rave rated

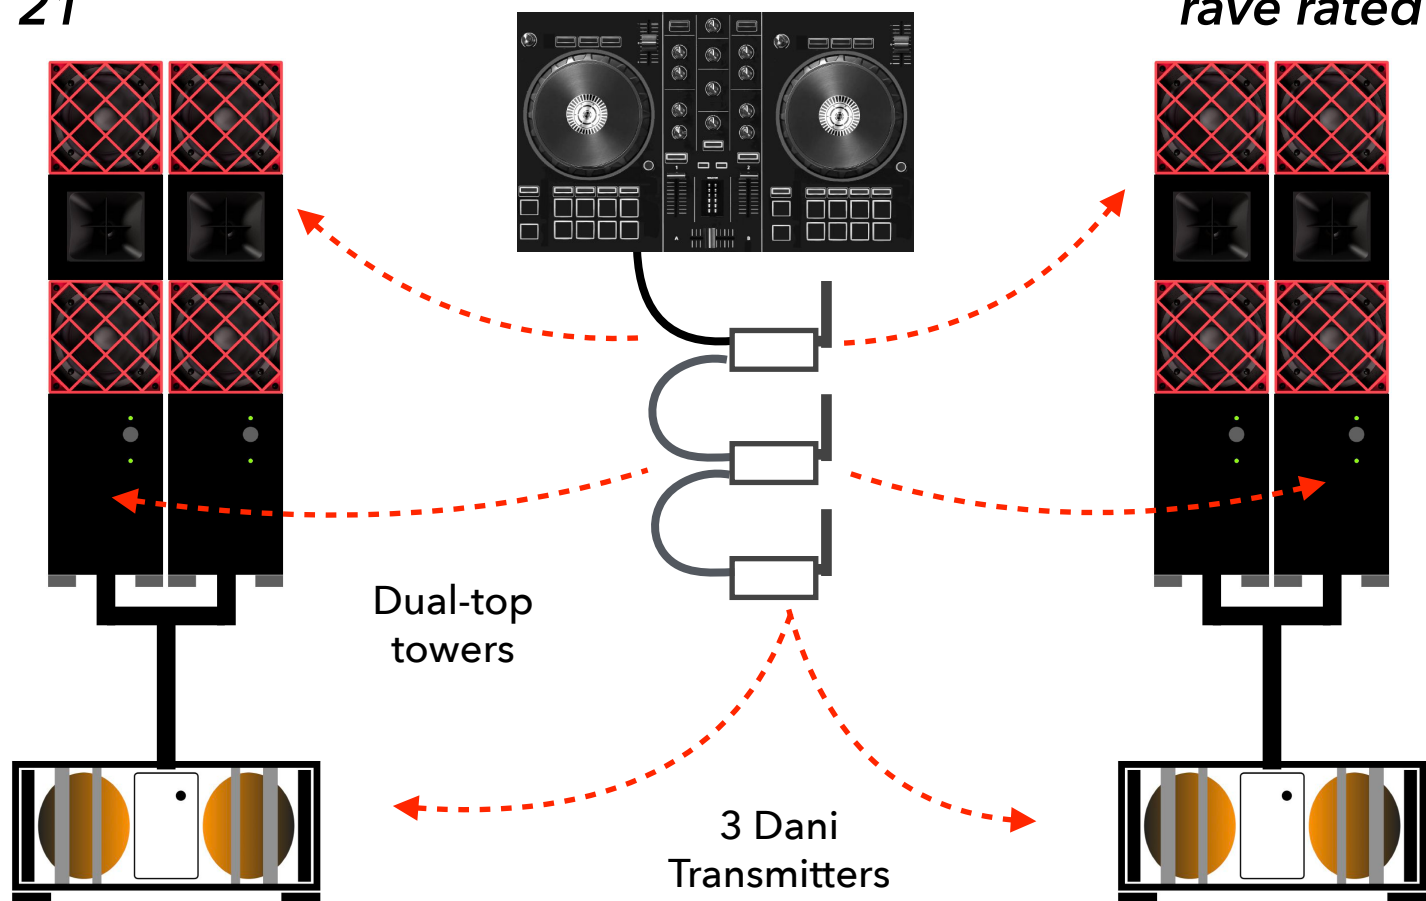


22

low latency monitoring

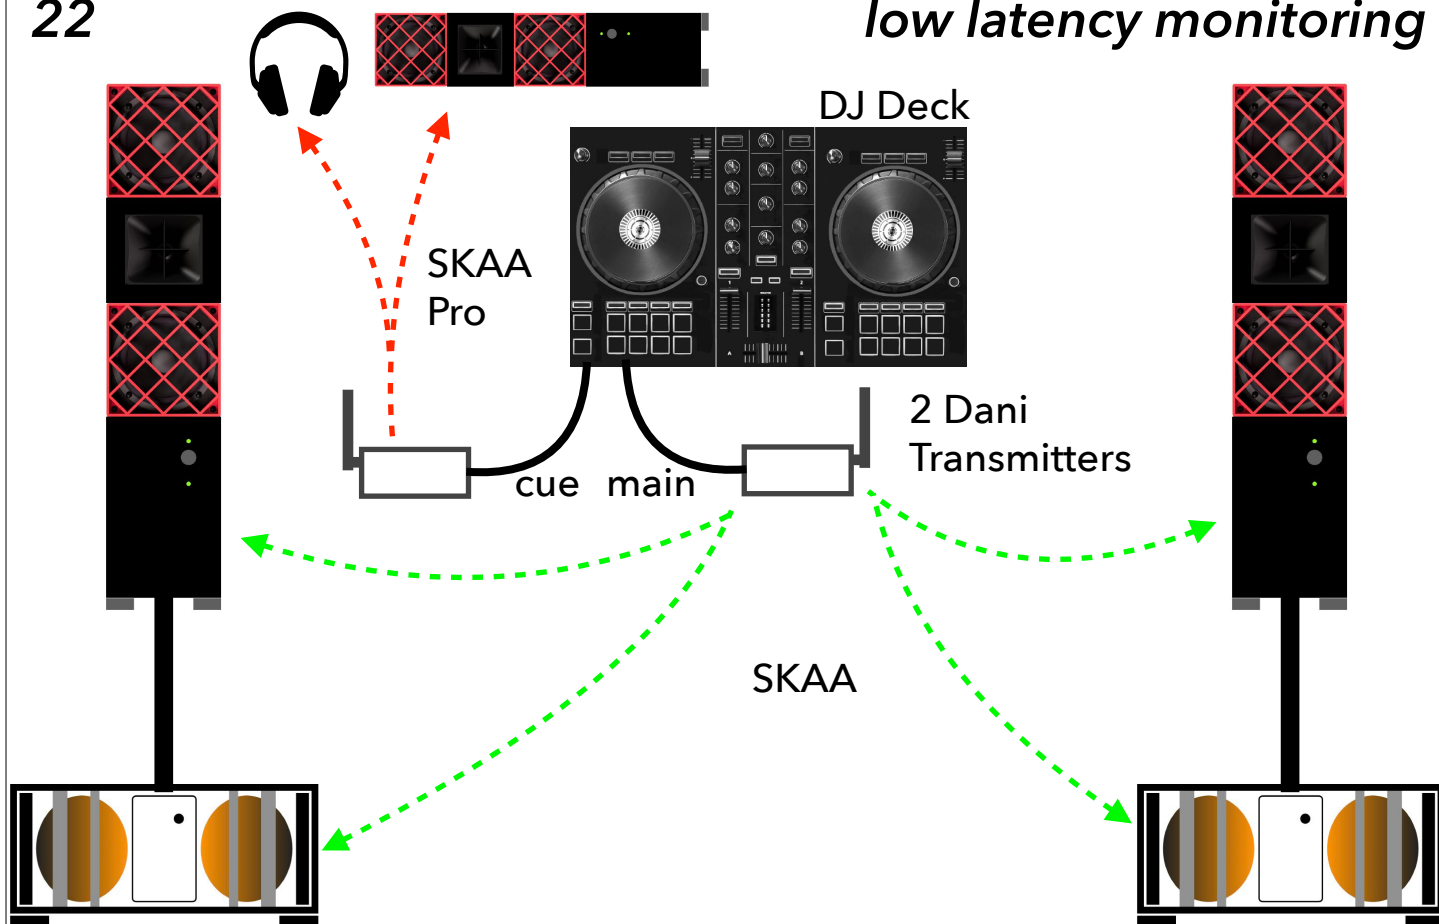


23

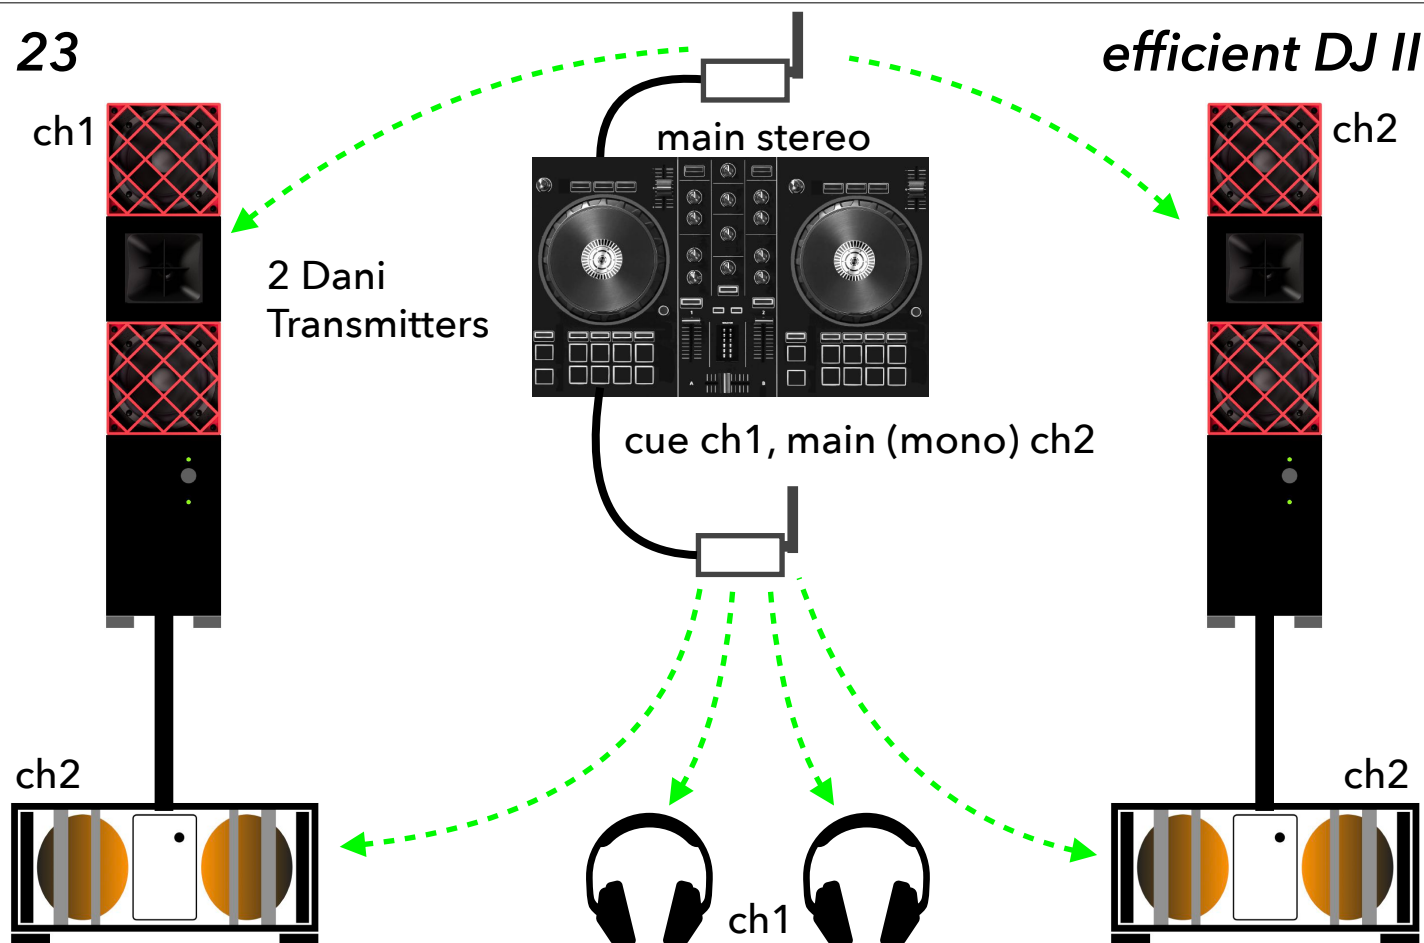


efficient DJ II

24

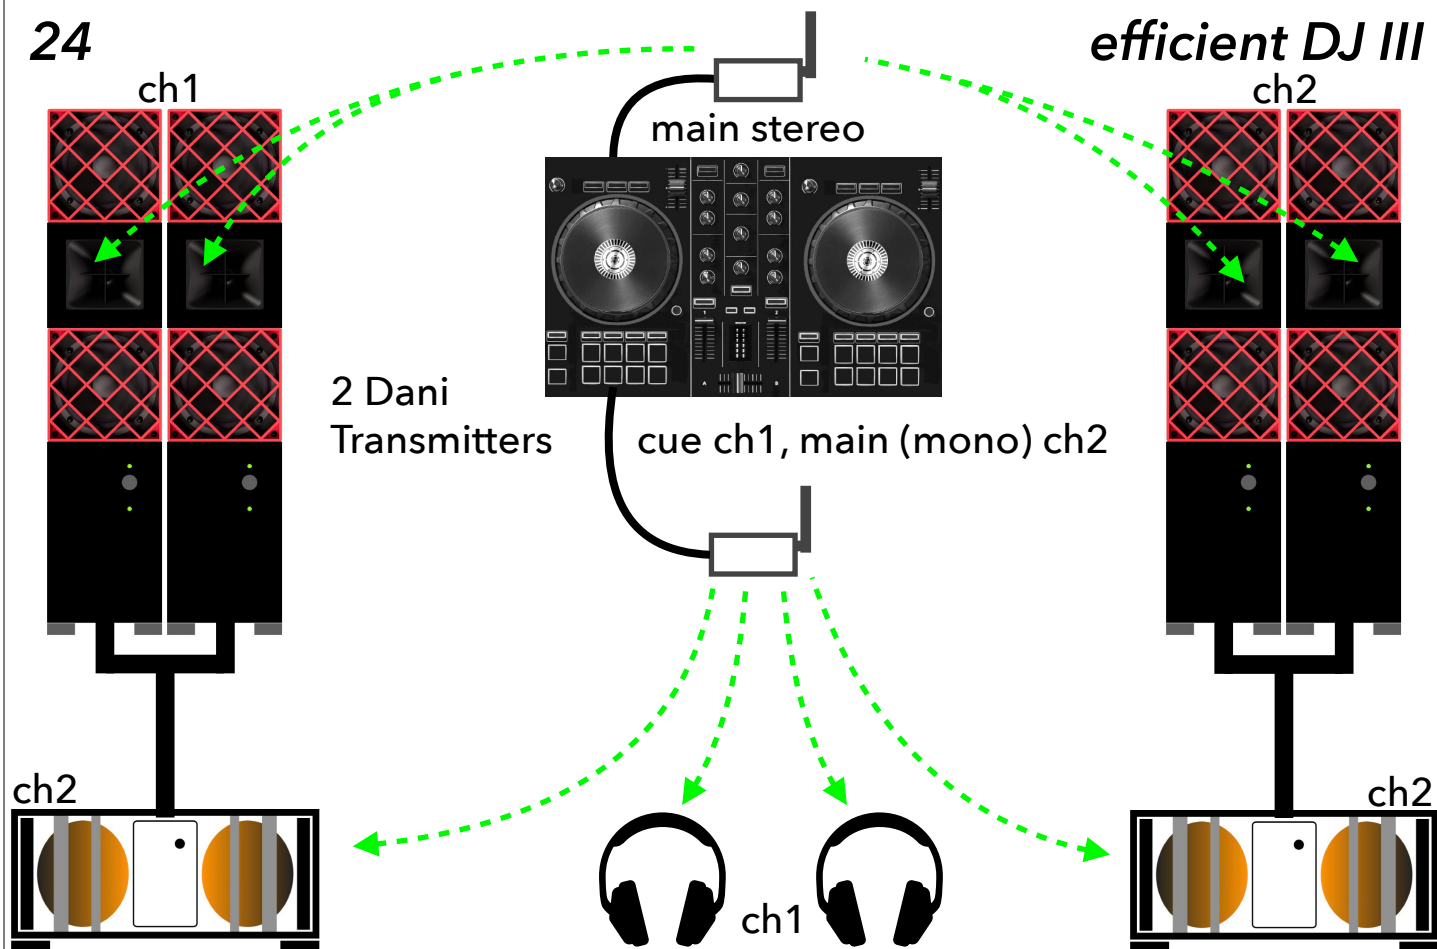


efficient DJ III

25

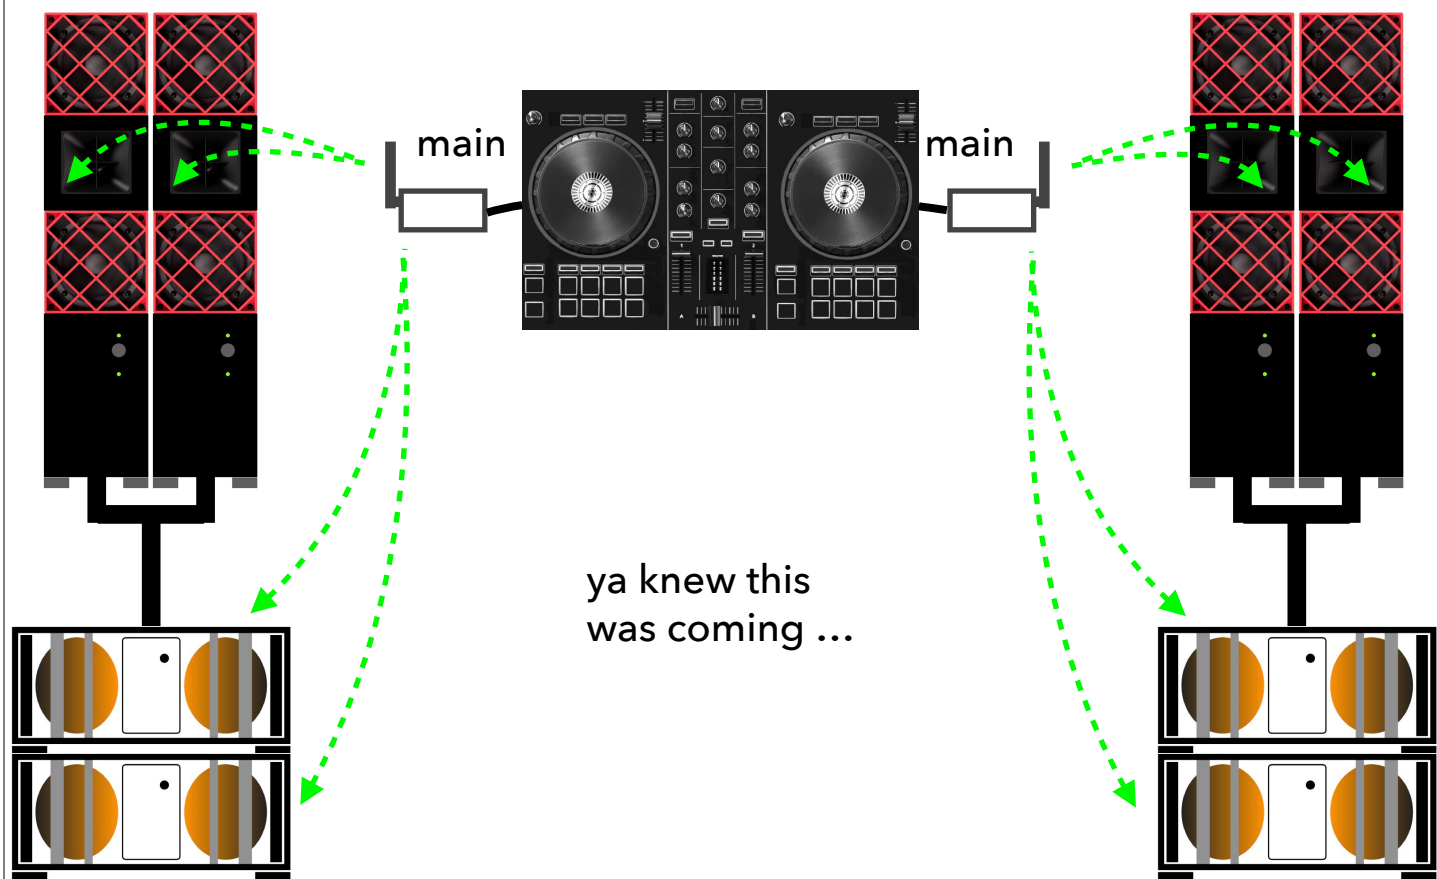


26

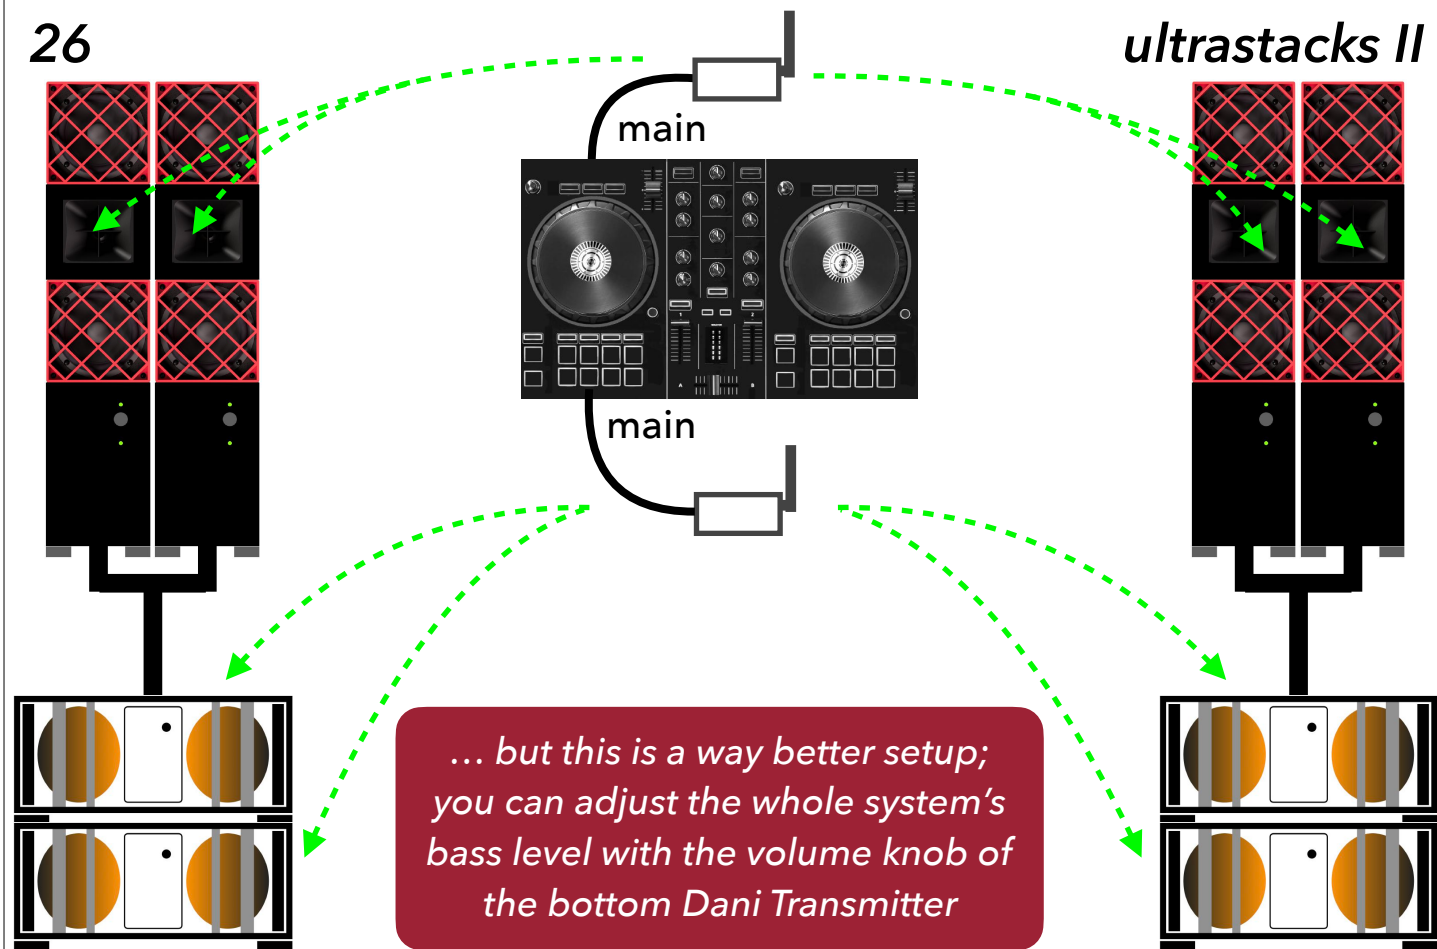

Music & Party


27

if you've got a SKAA Hub, you do this every day

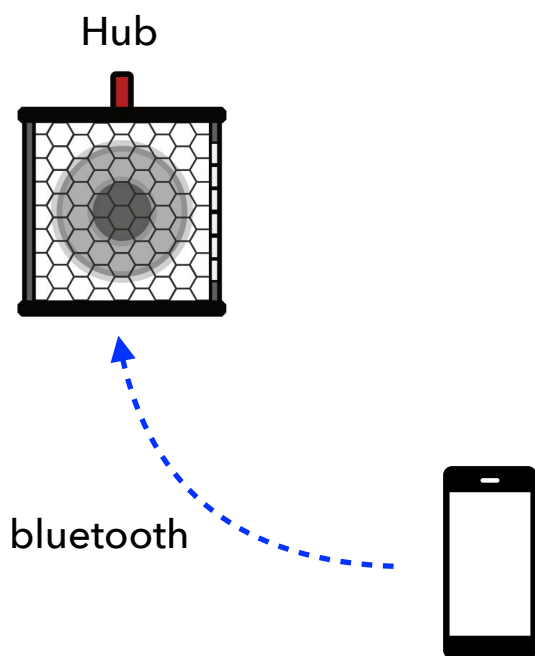


28

now pimp it with a DFA

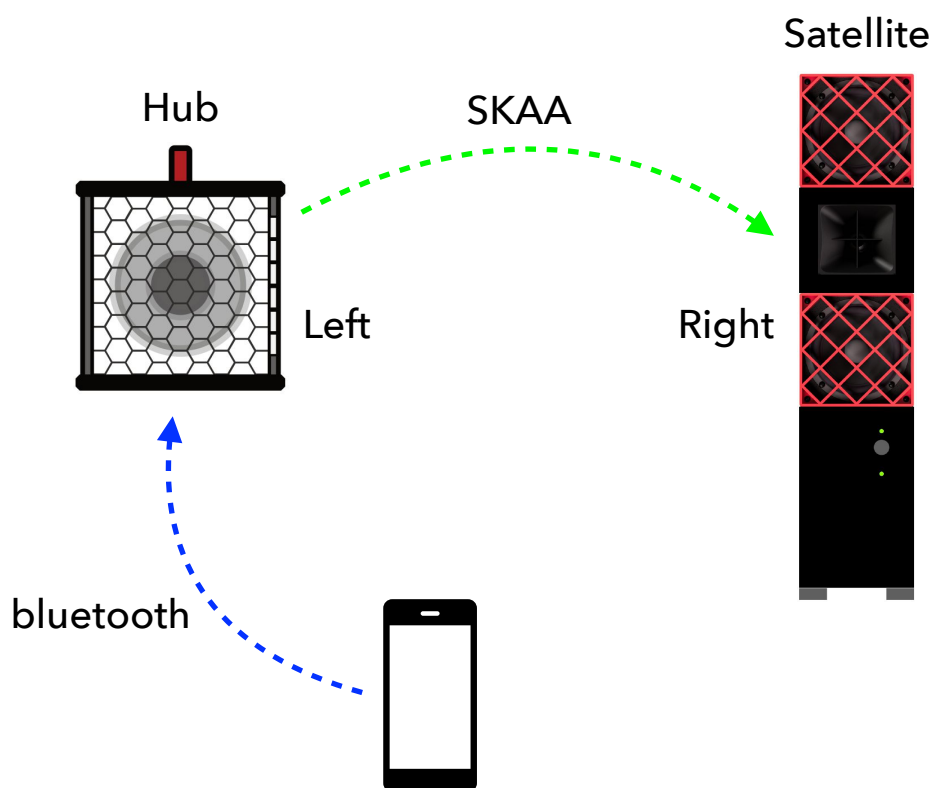


29

big party

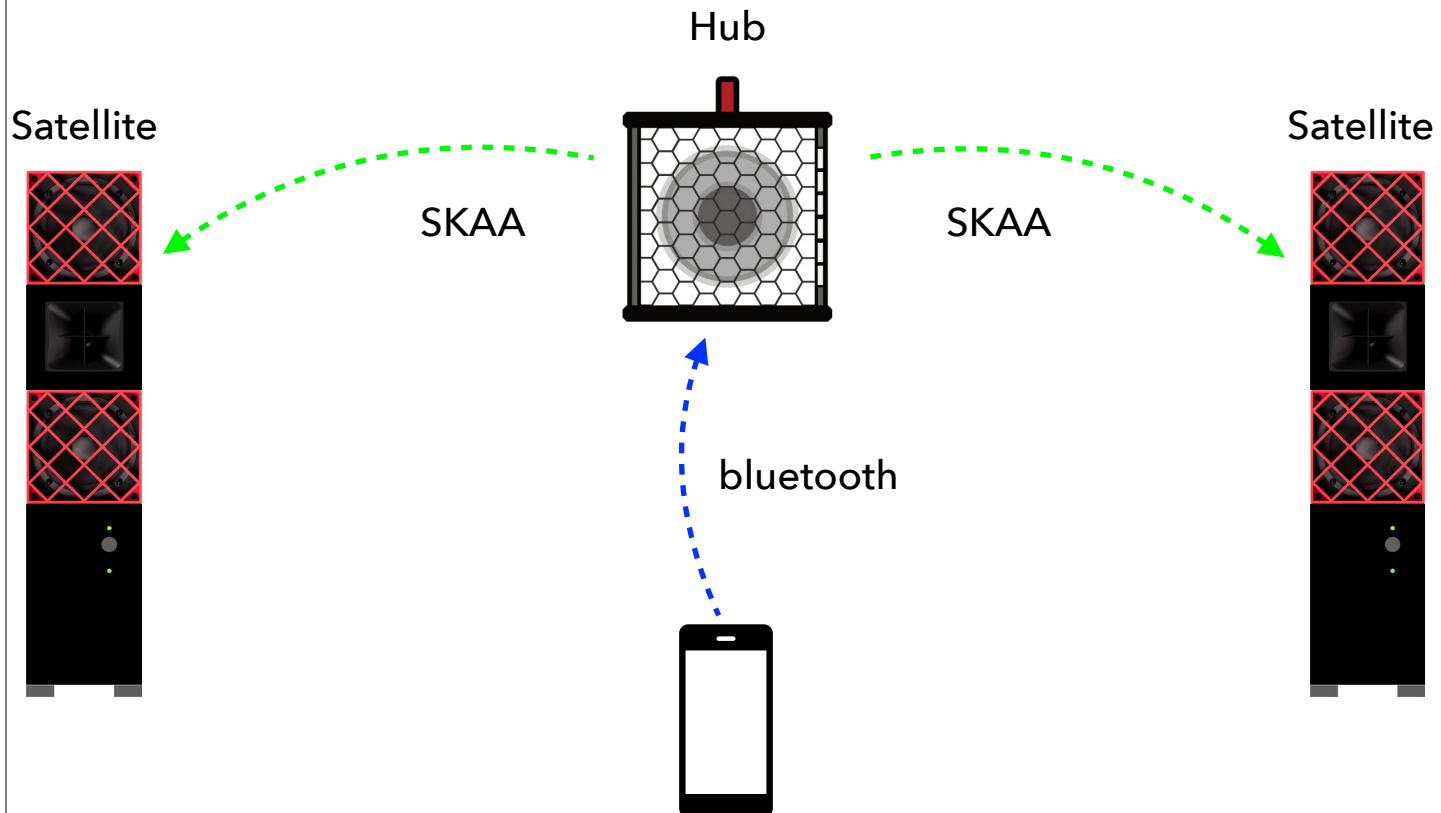


30

really freakin' big party

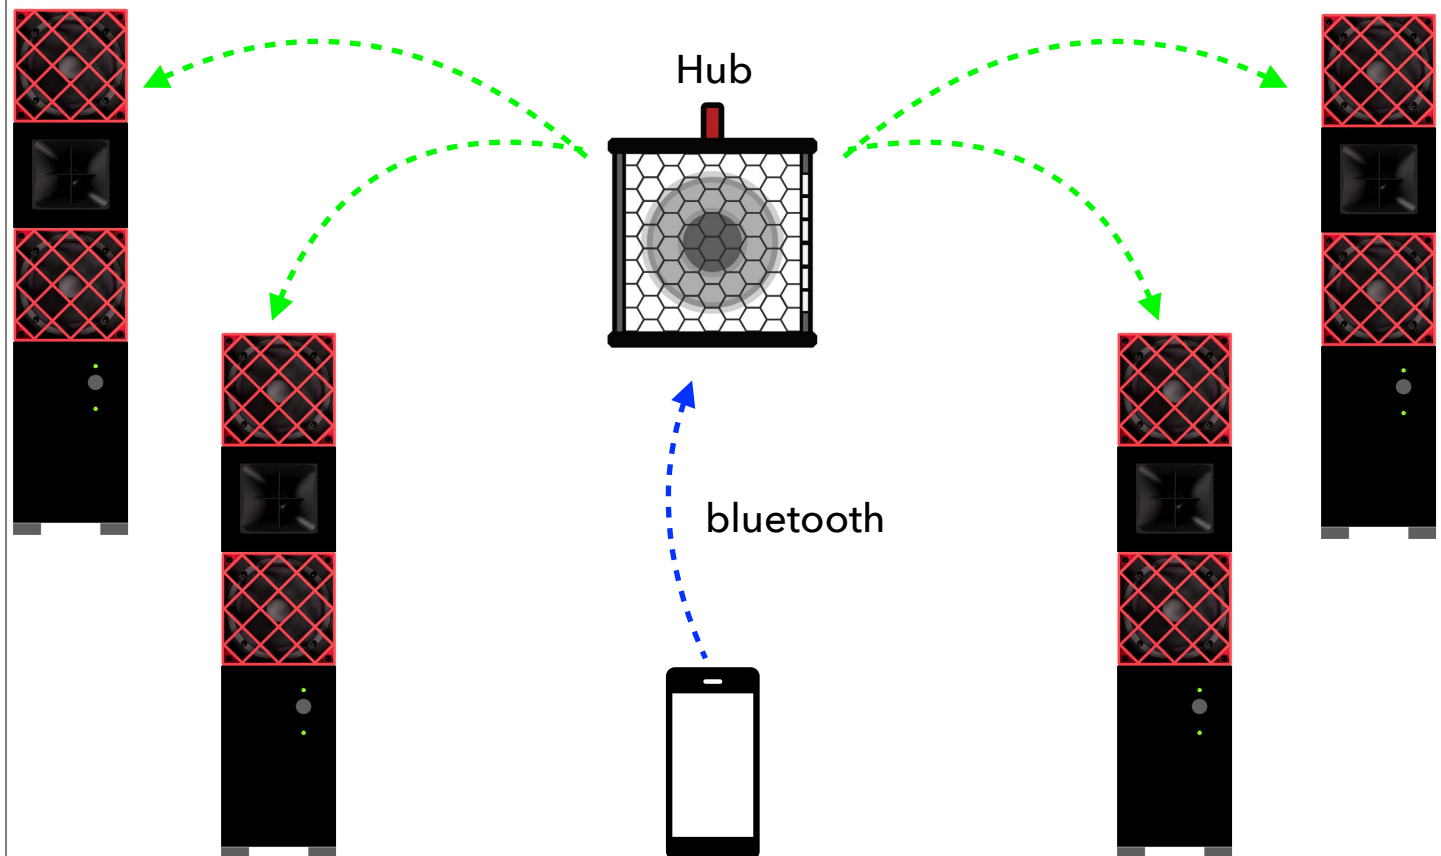


31

don't forget the bass

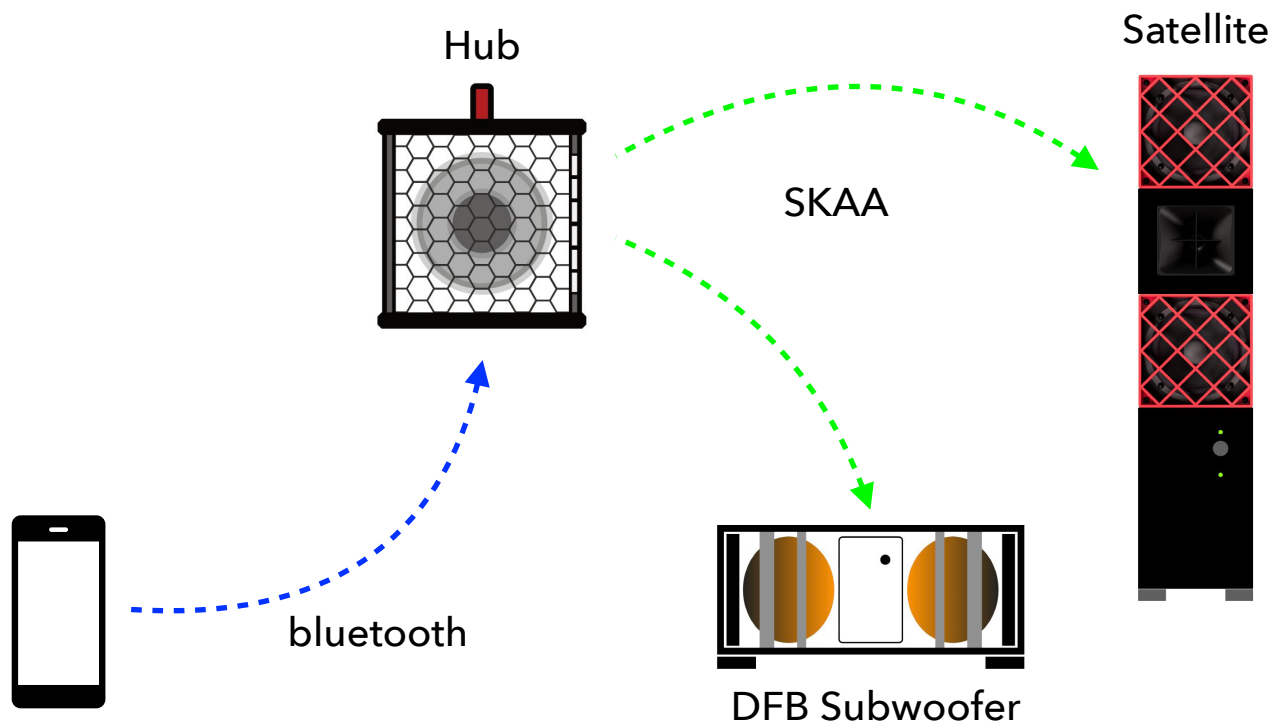


32

5 piece party

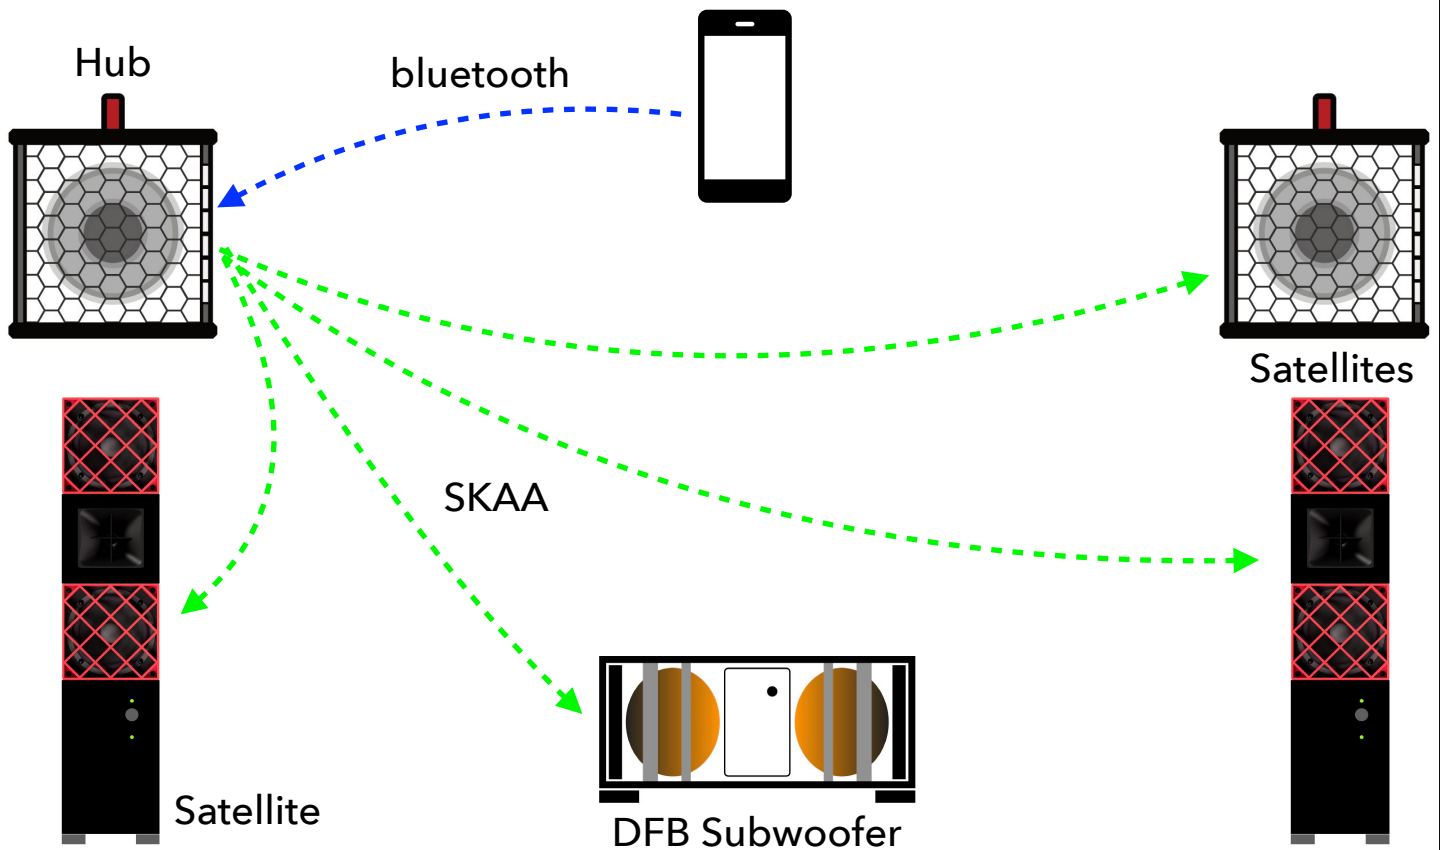


33

... more bass good

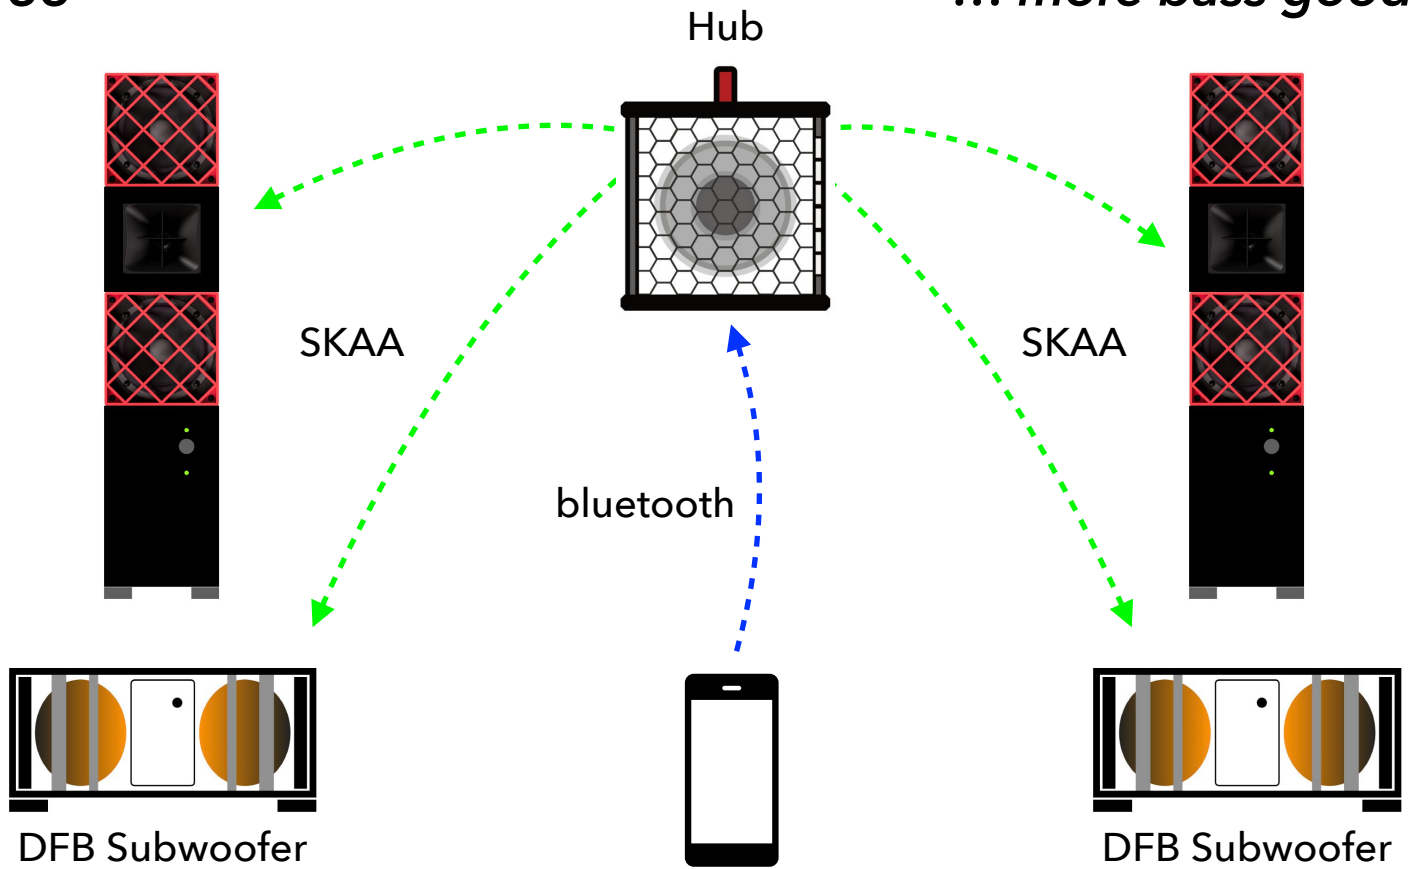


34

meet the cops

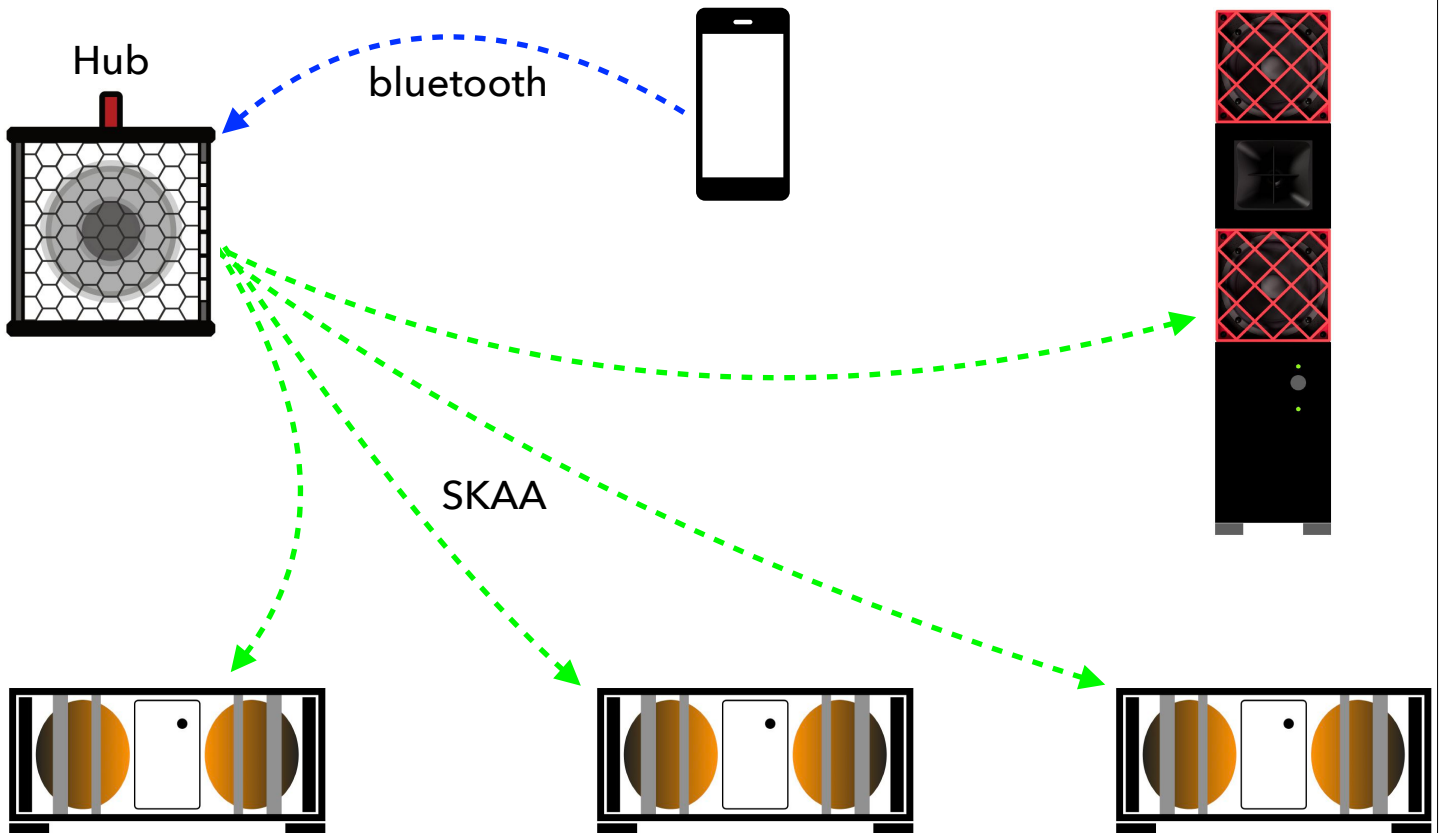


35

pump up the fidelity I

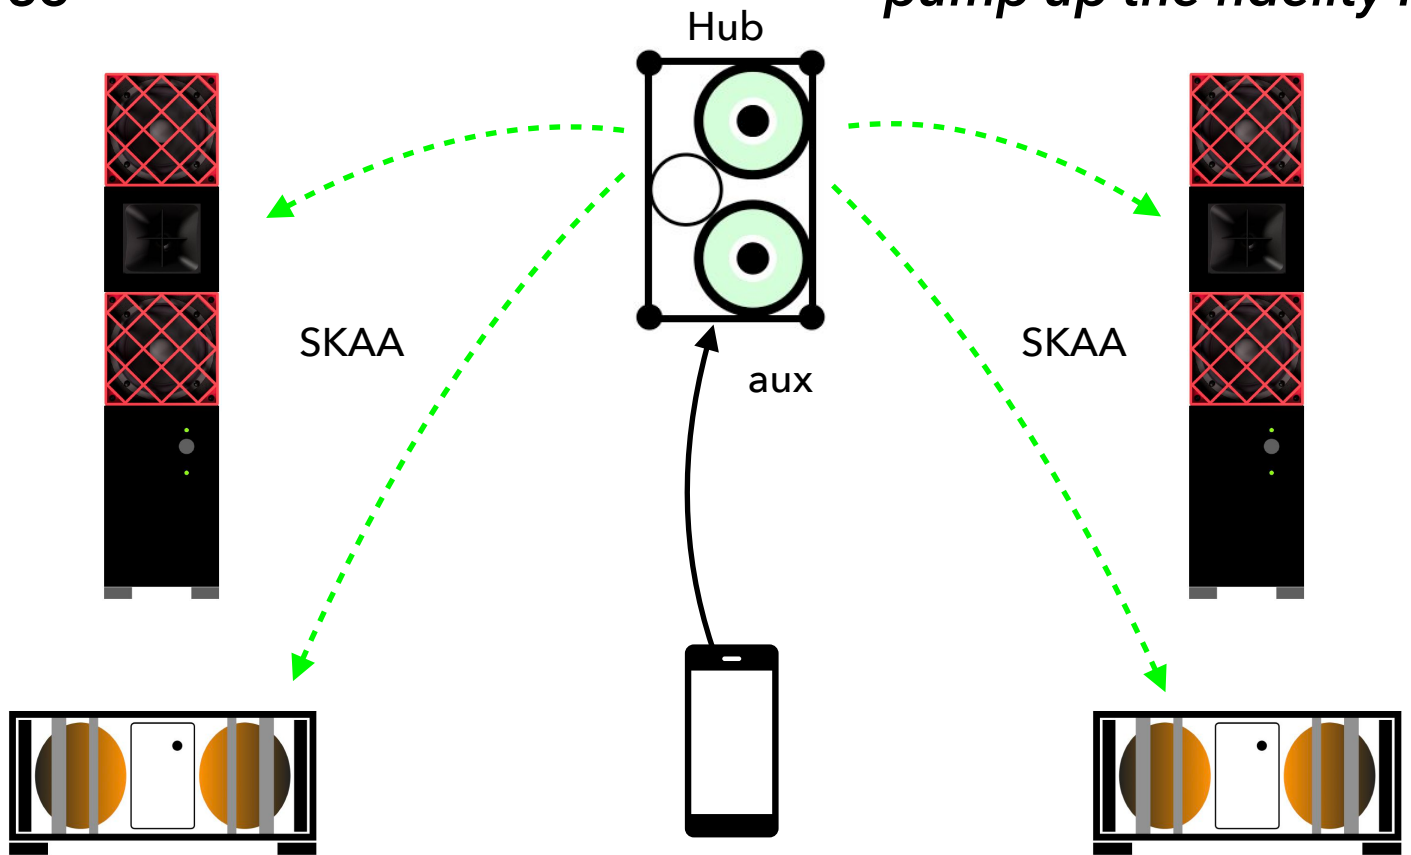


36

pump up the fidelity II

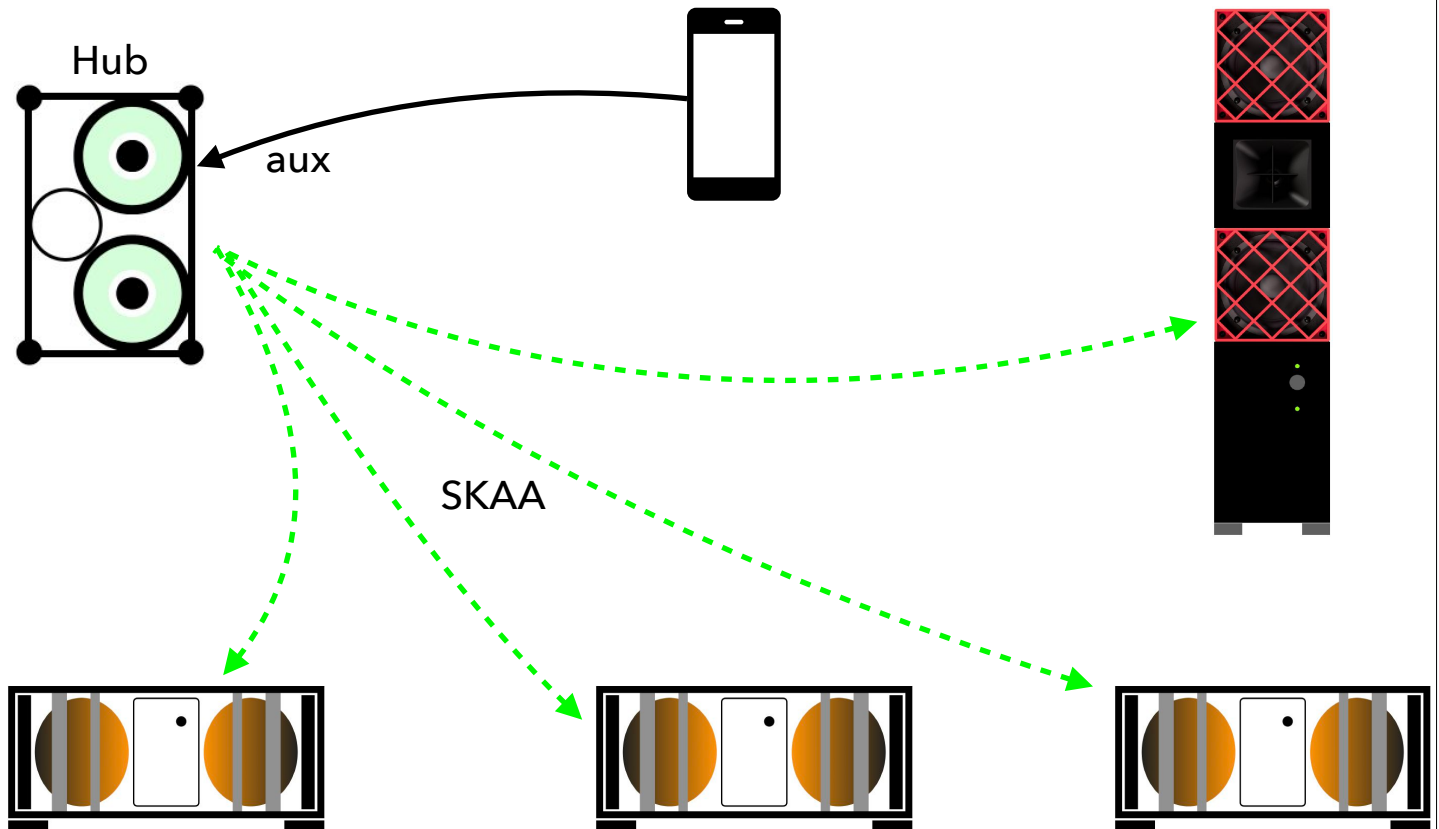


37

... ludicrous I

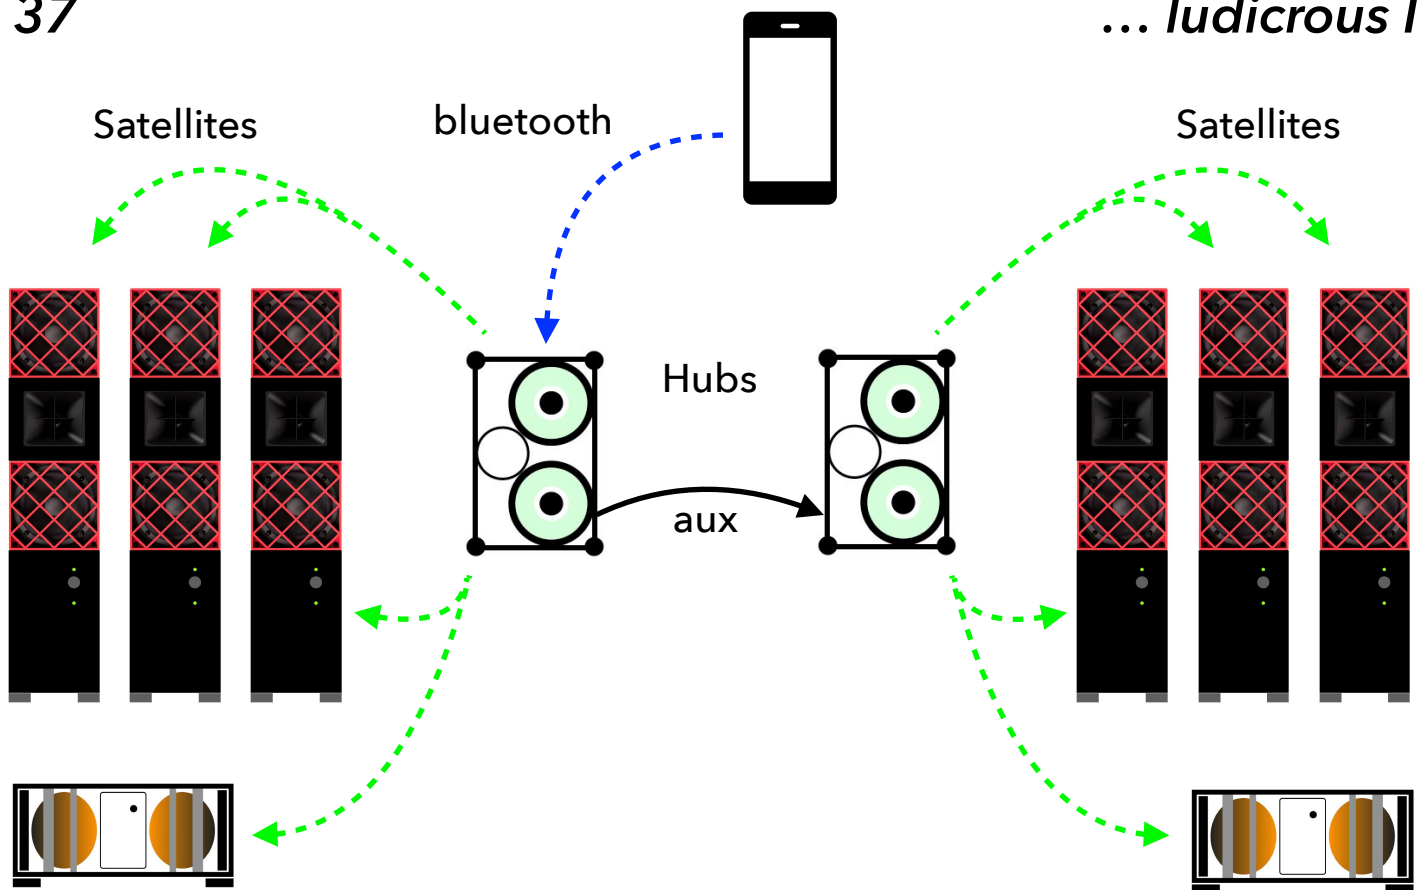


38


... ludicrous II

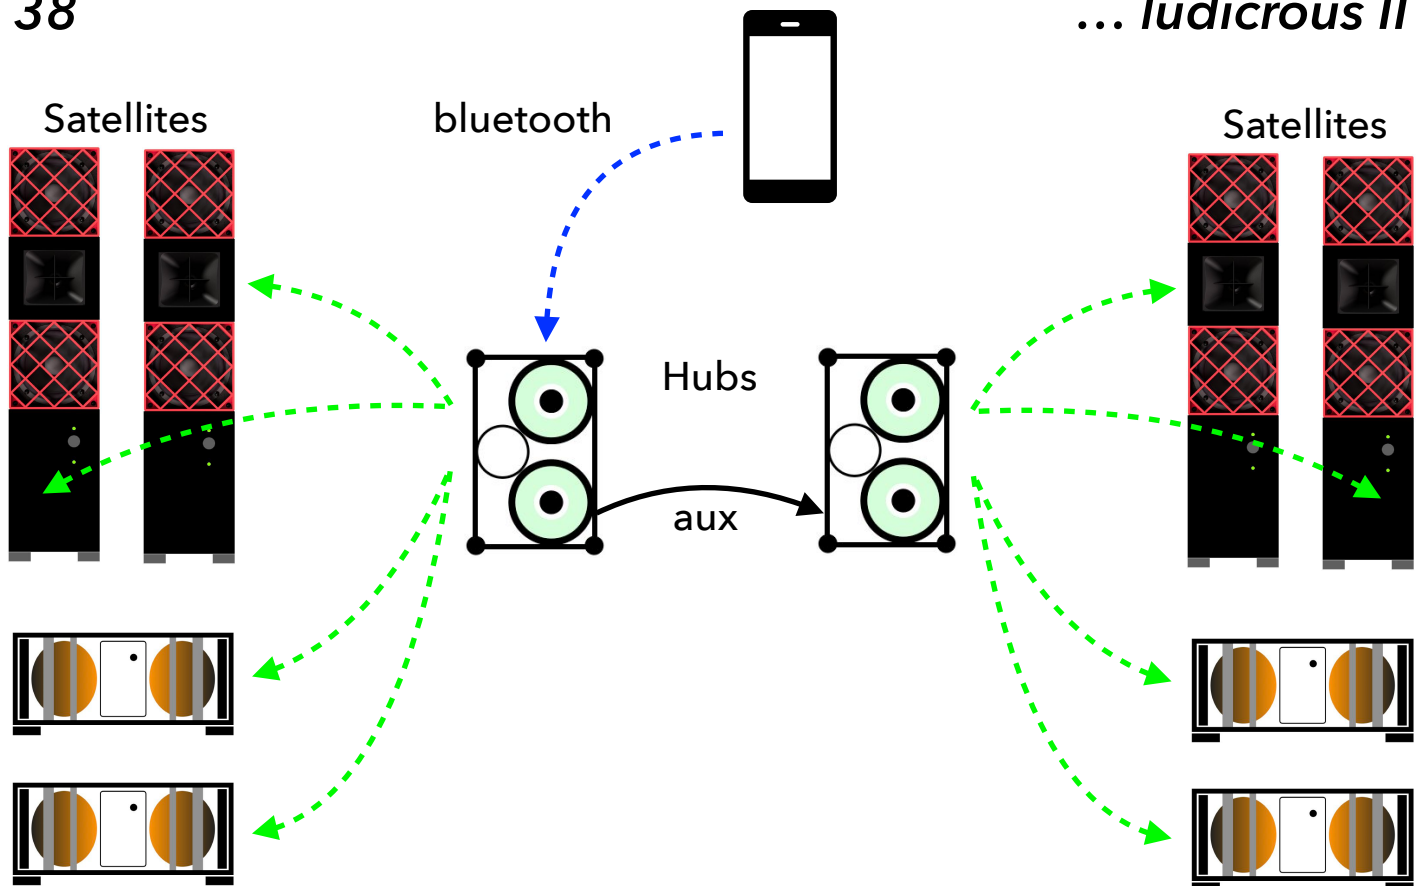


39

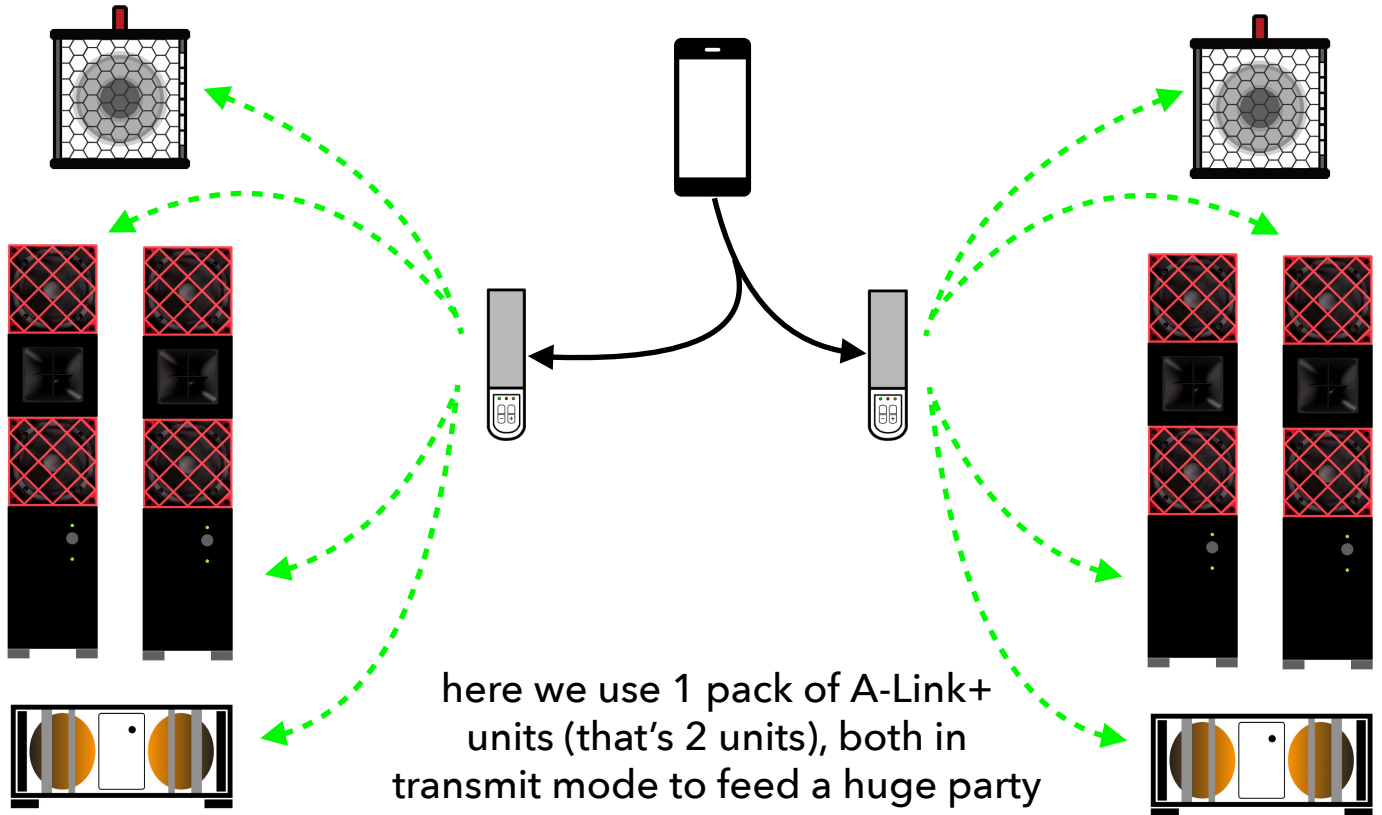ludicrous III


40

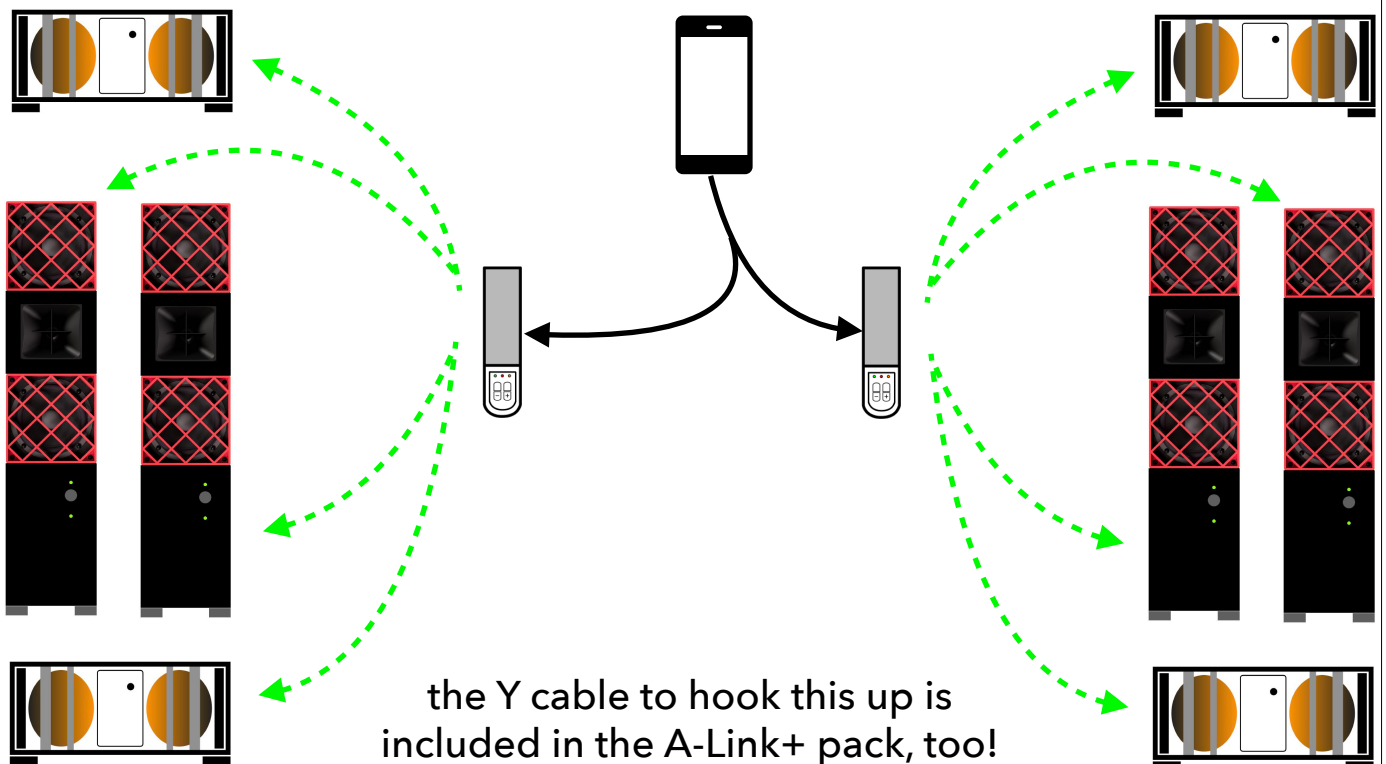ludicrous IV

41

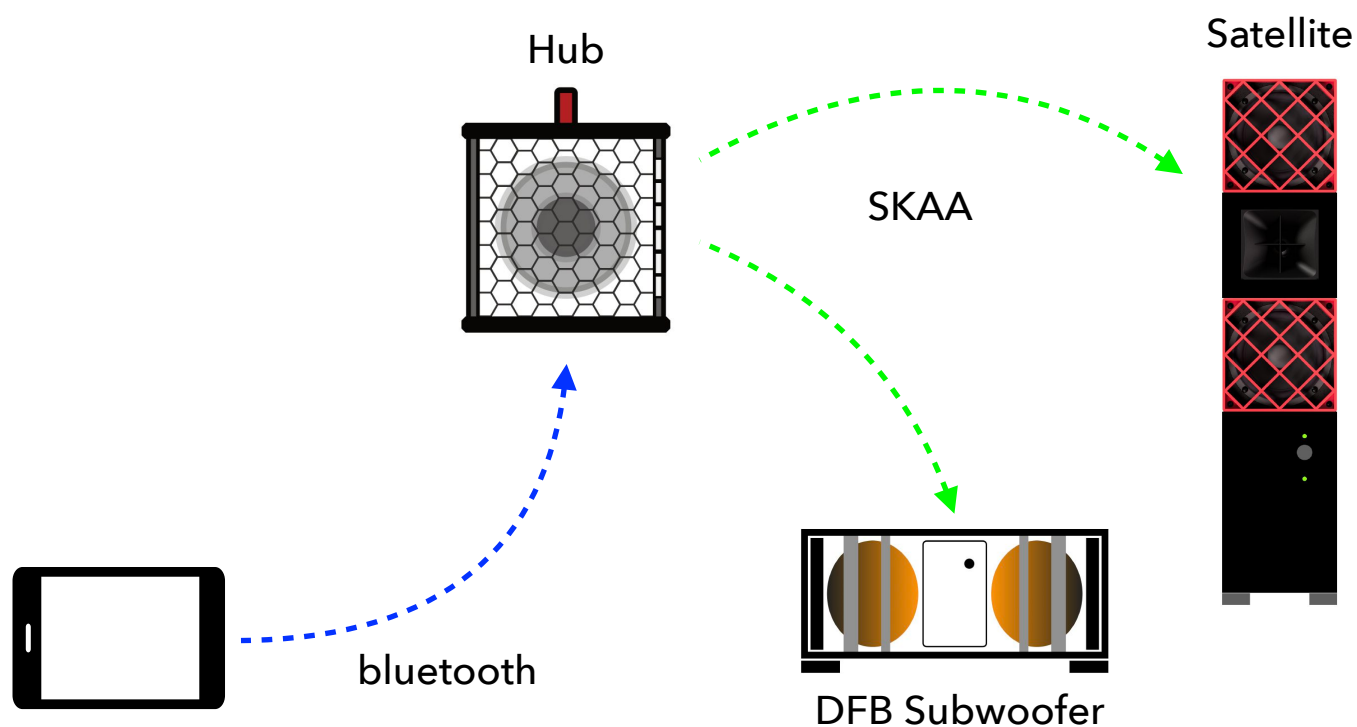
all "phone" hookups work with tablets, too

42

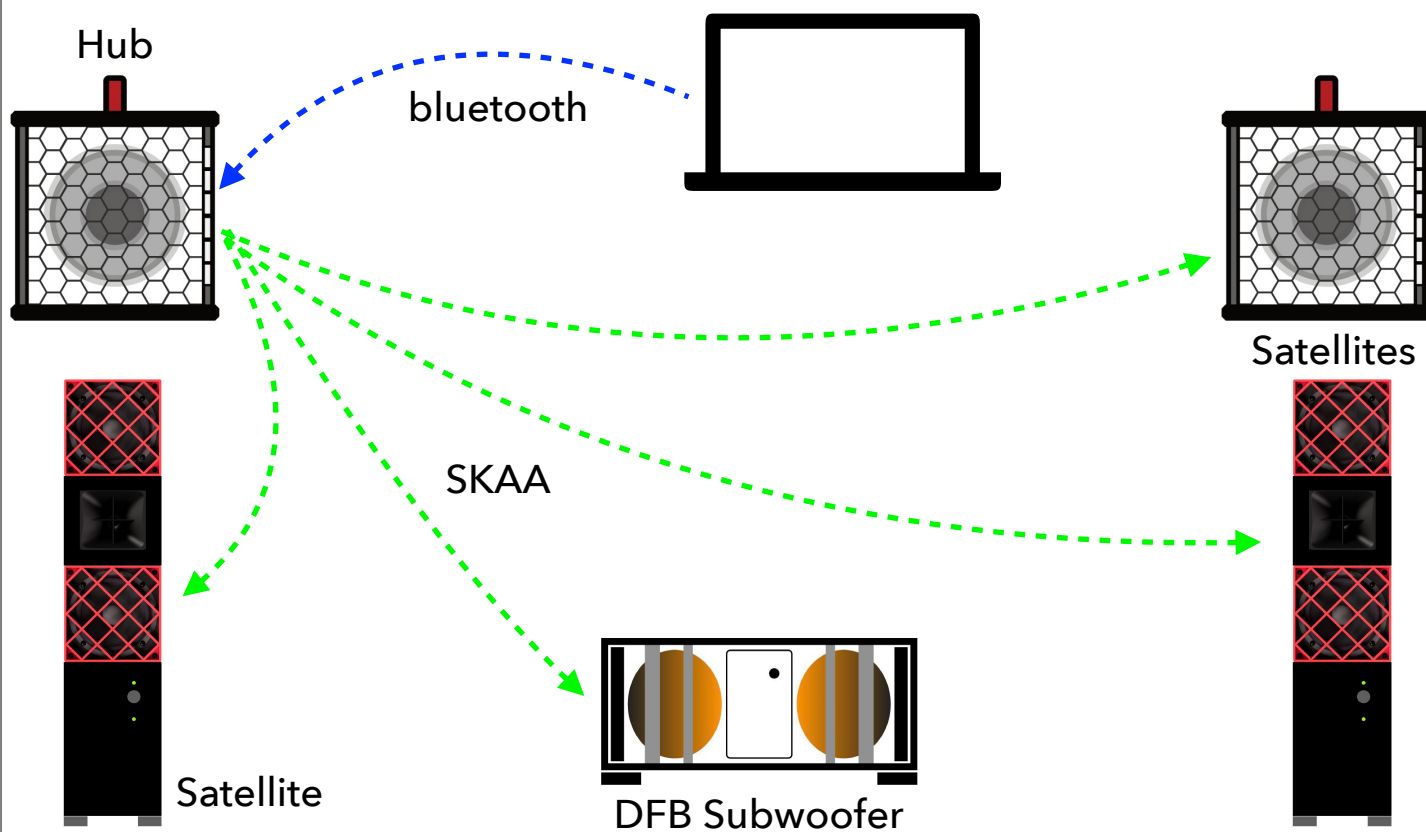... and notebooks


43

the 3.1

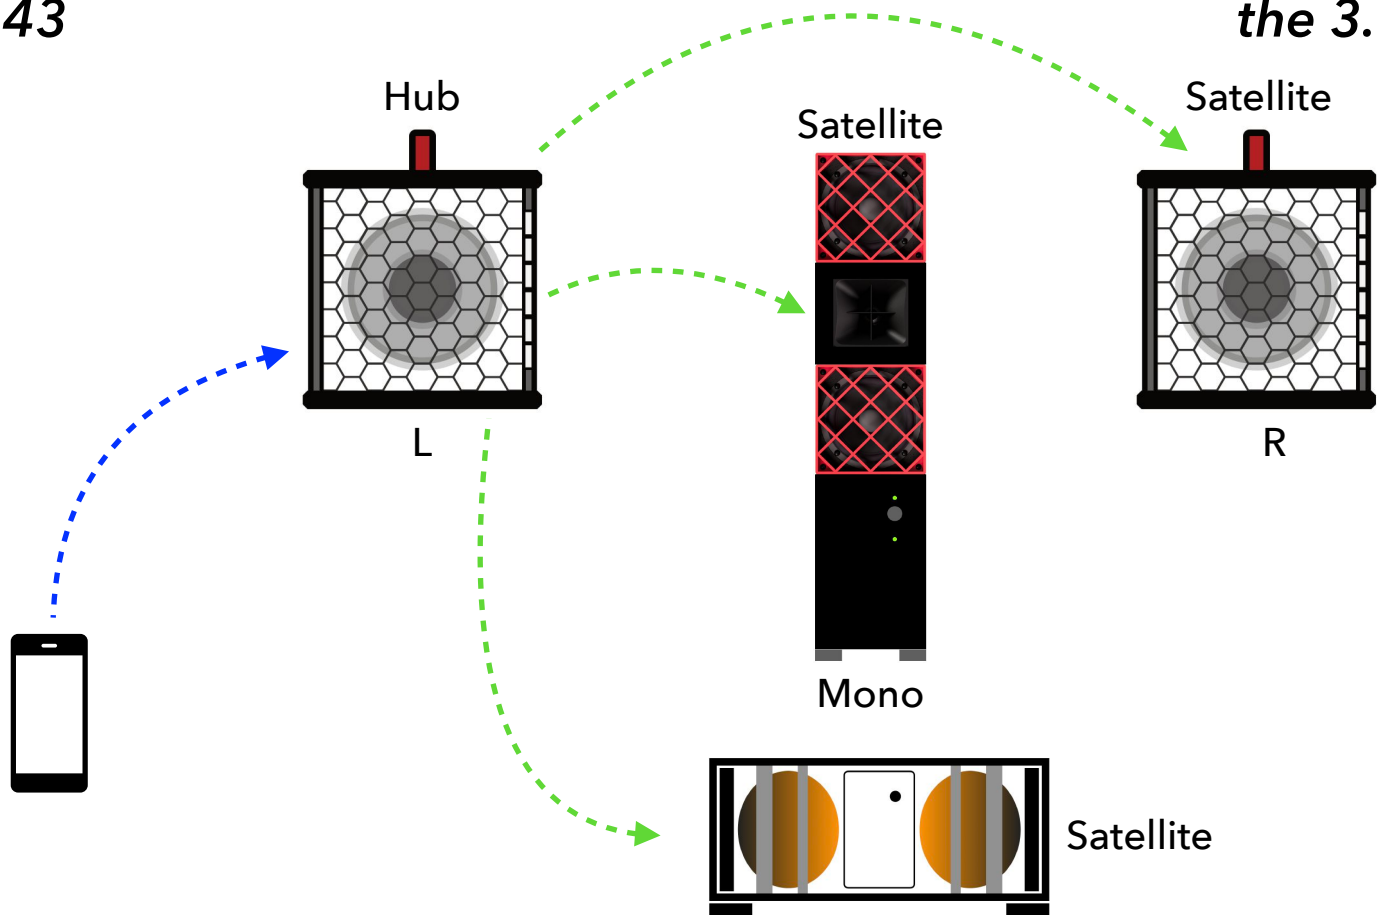


44


the 360

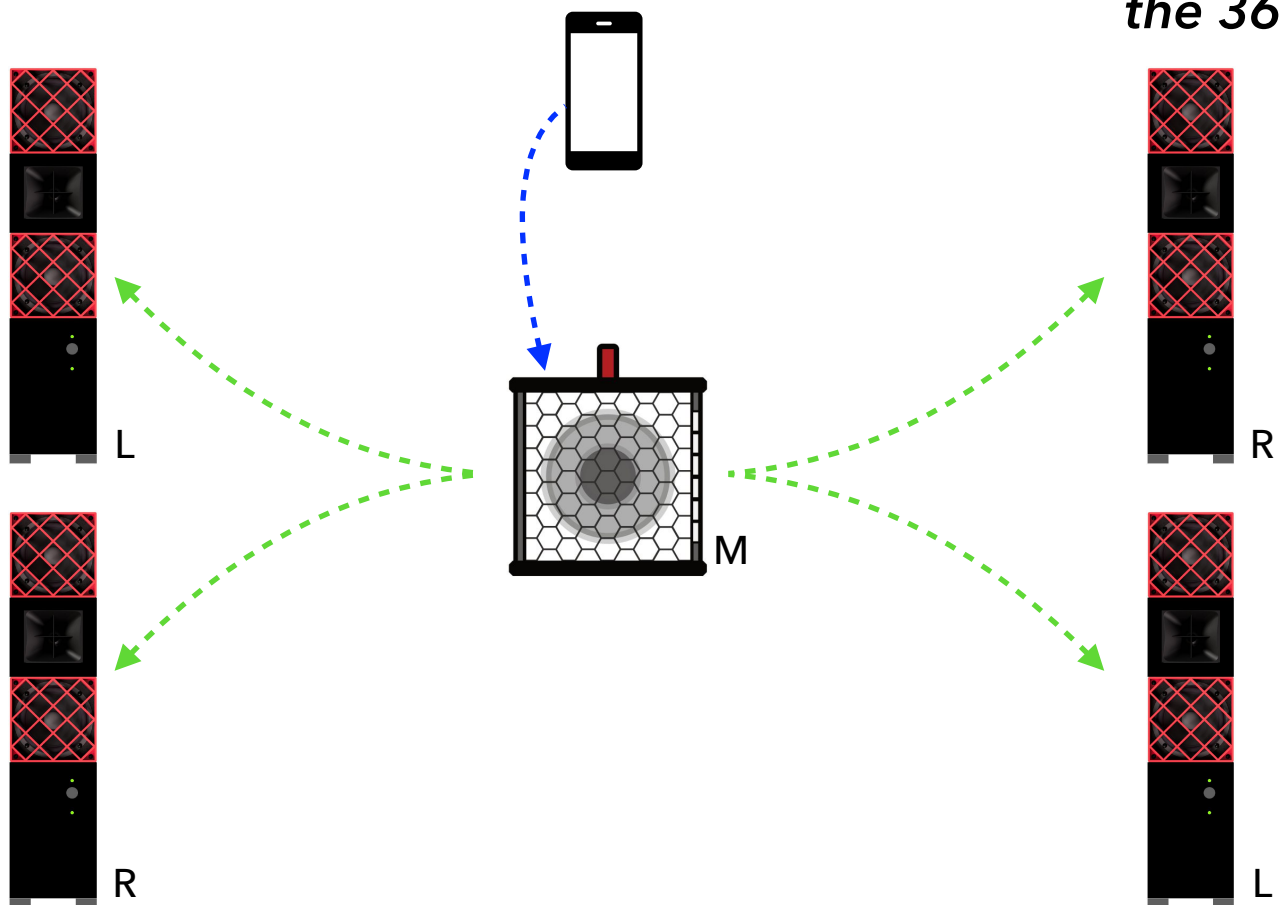

45

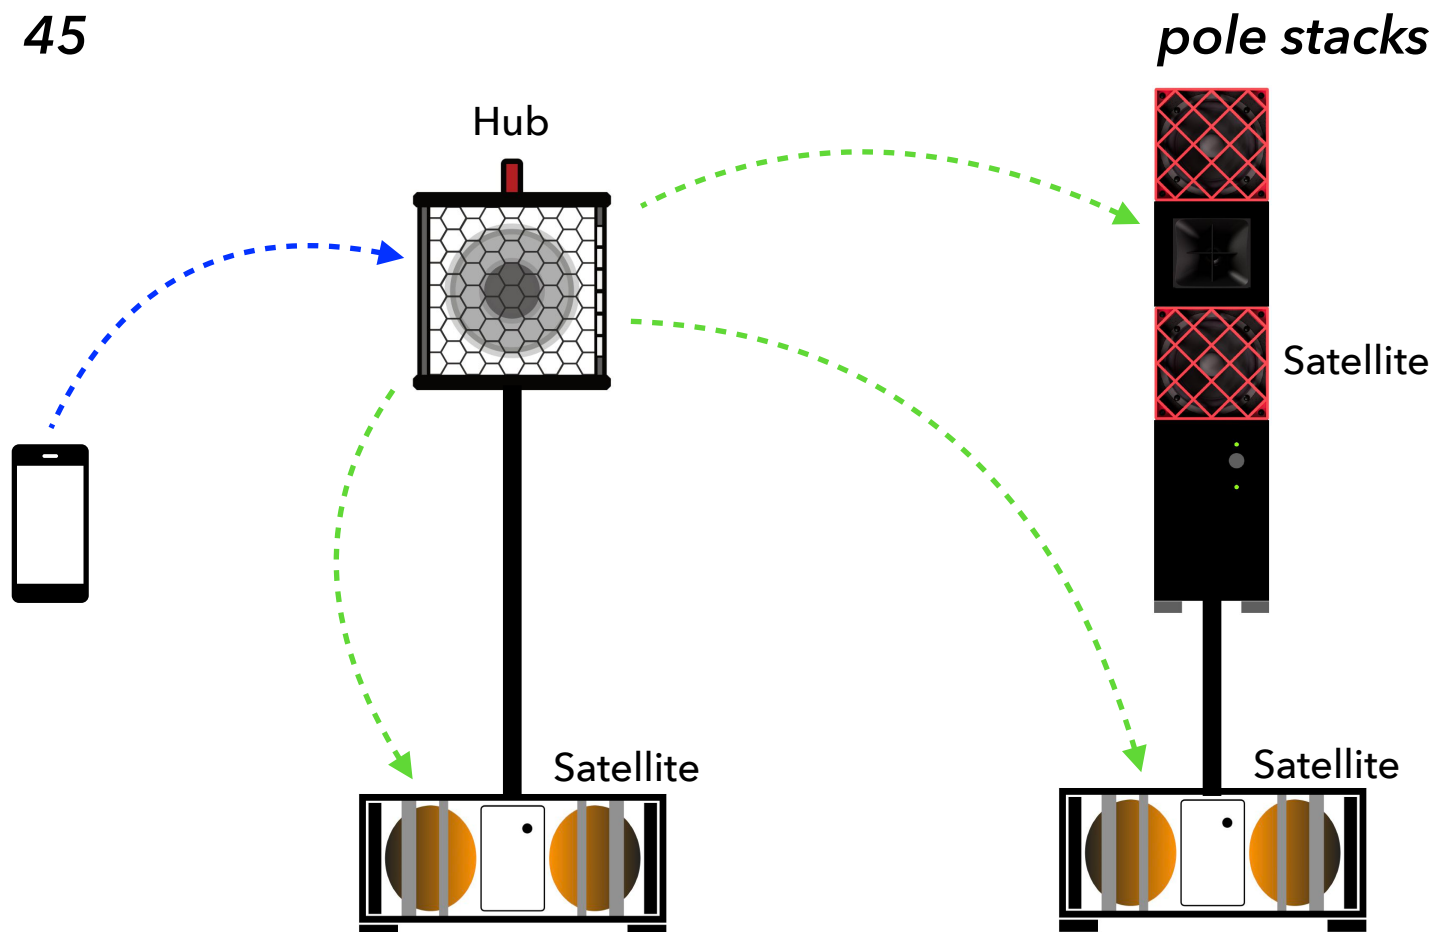


46

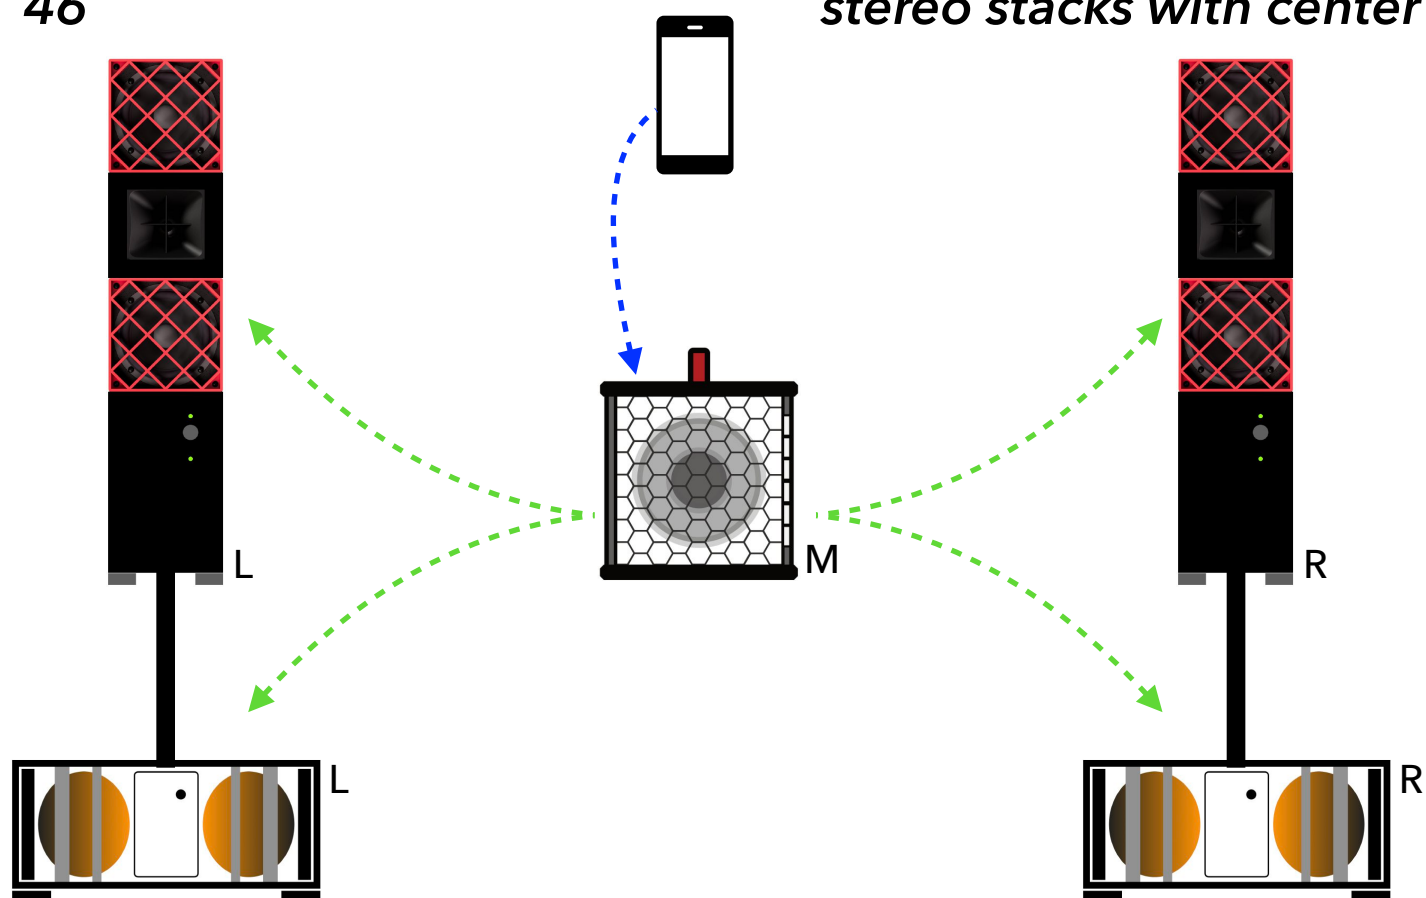stereo stacks with center


47

two hop

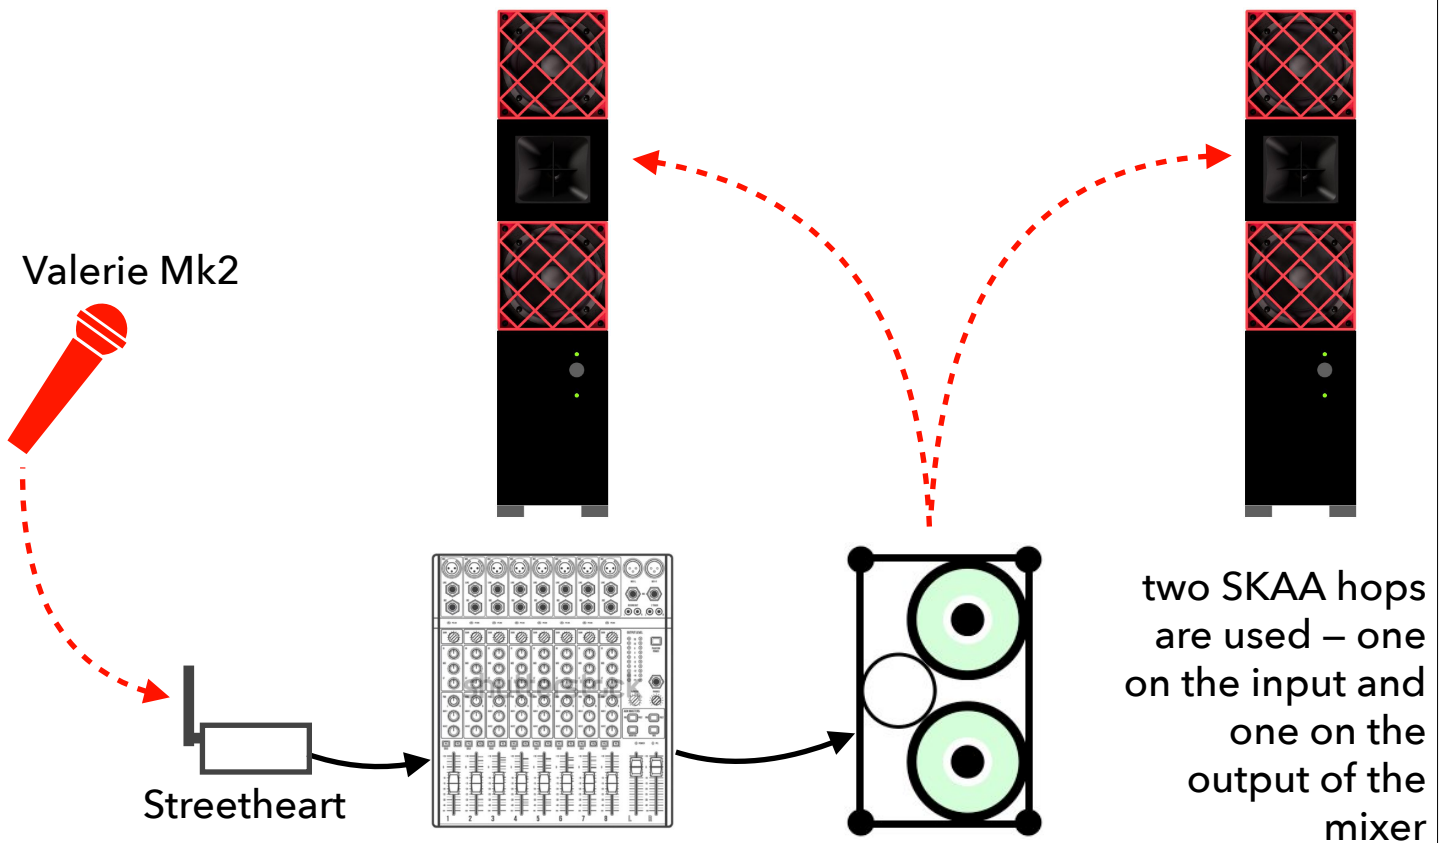

48


two hop II

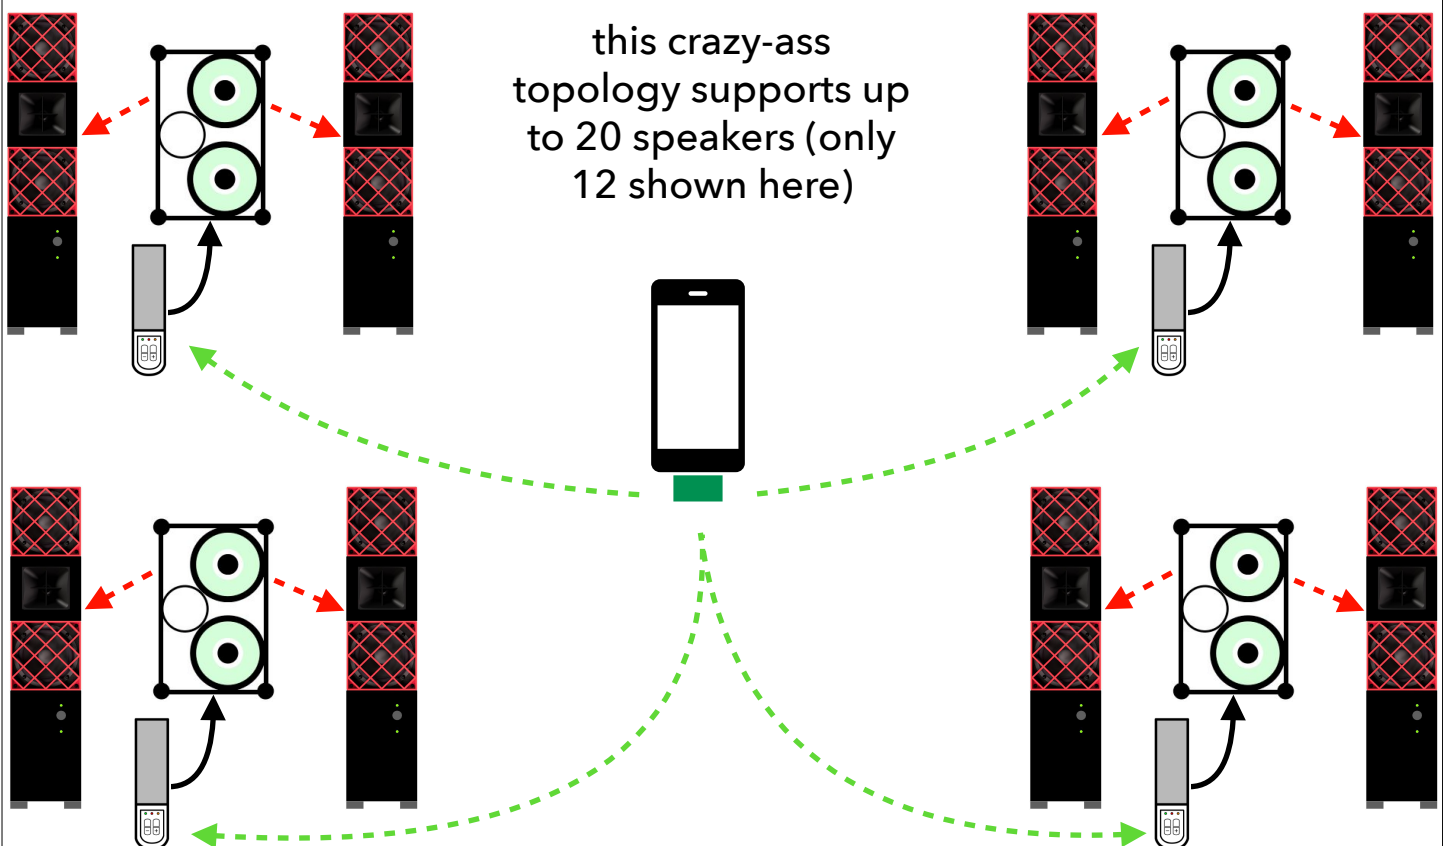

Deckless DJ


49

the all-too-common deckless DJ

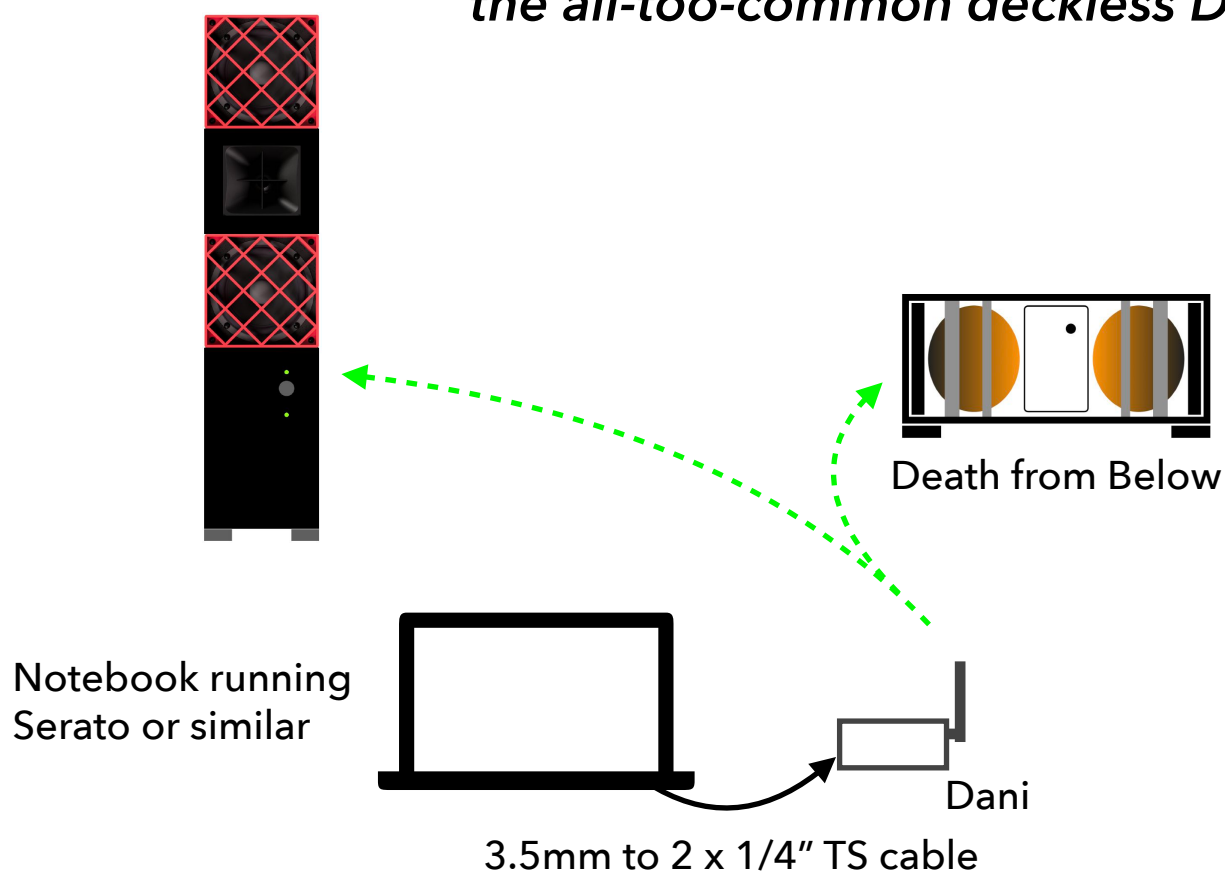


50

for the bigger room

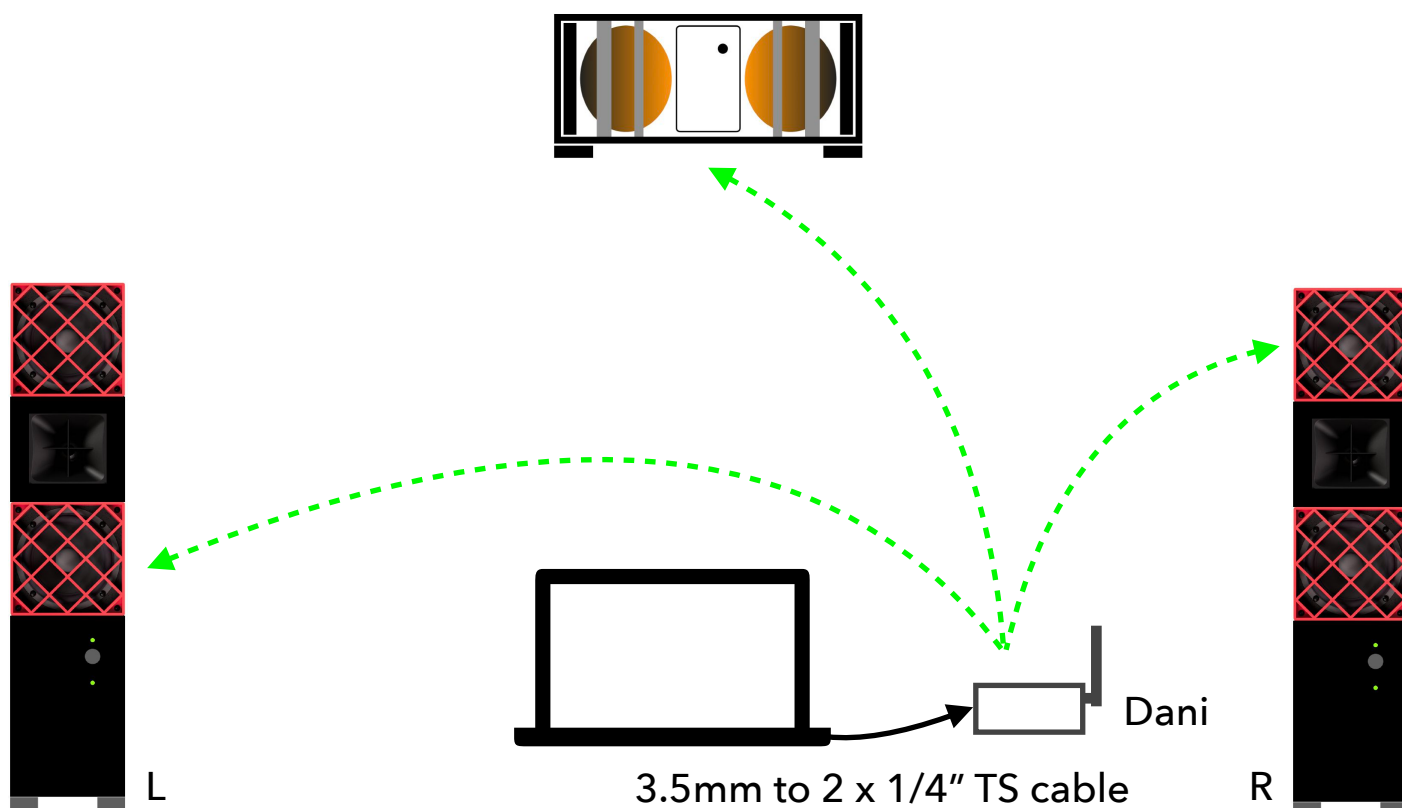


51

fill a wedding venue without running cables

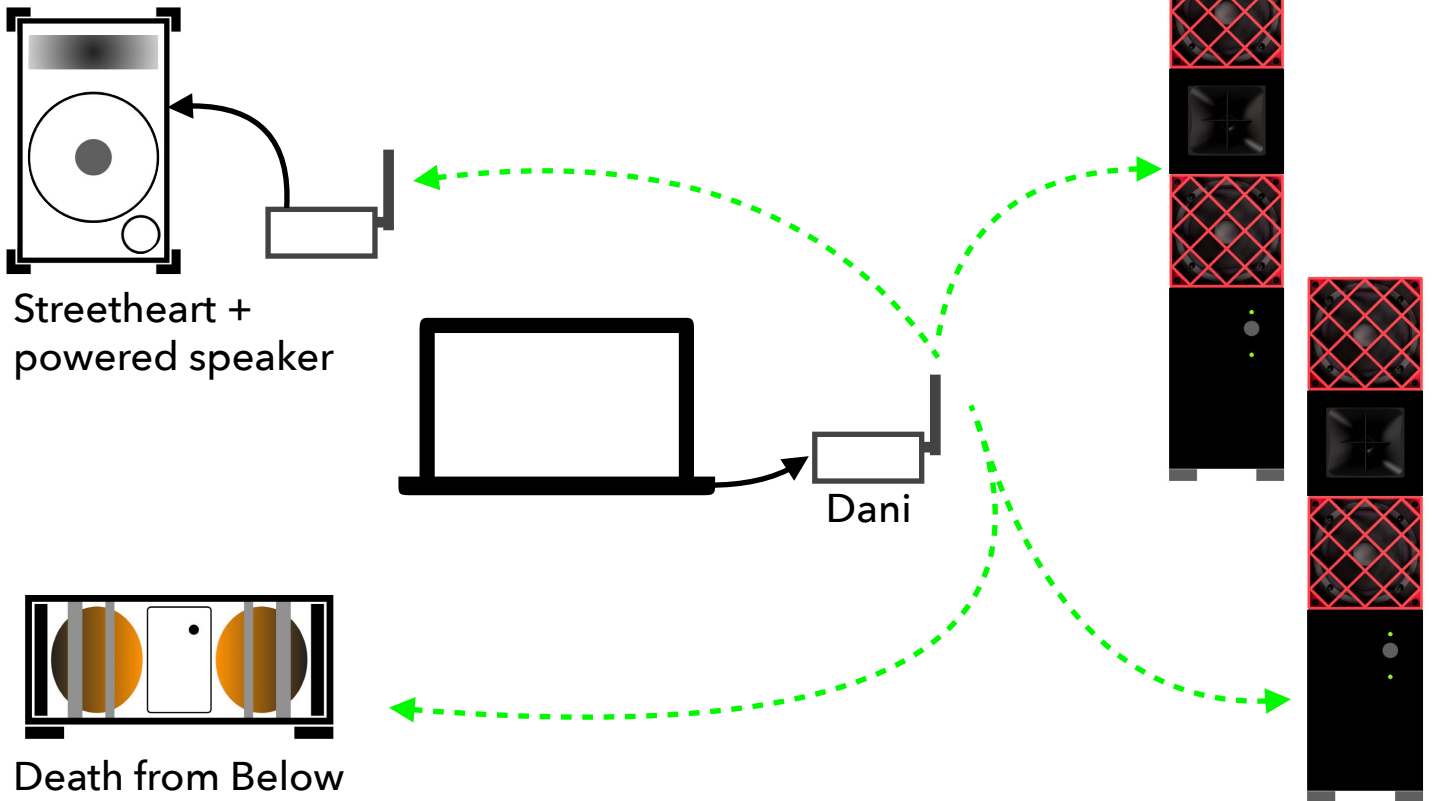


52

or use DFAs to pick up the extra rooms

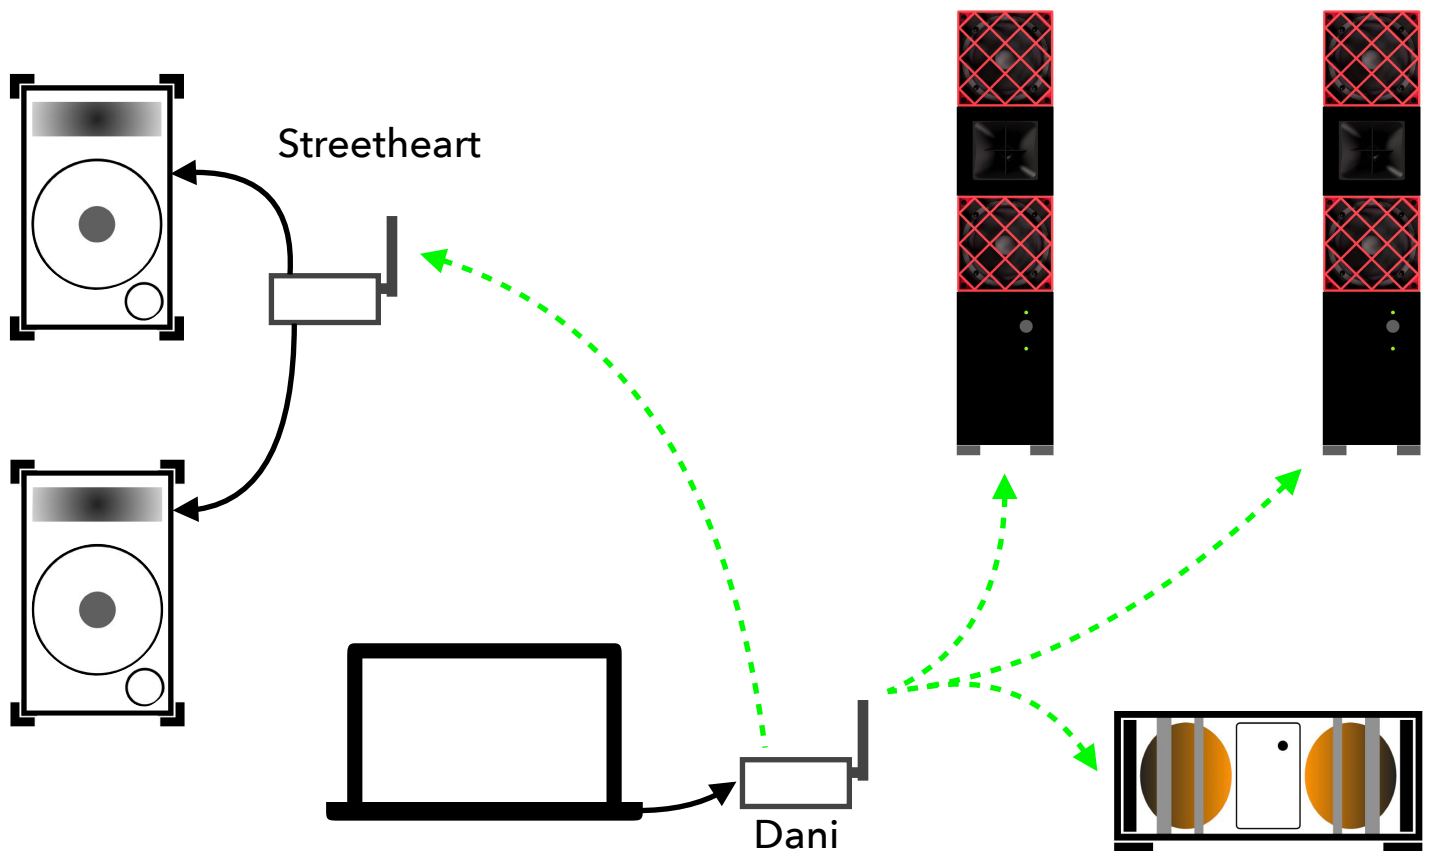


53

capture your performance

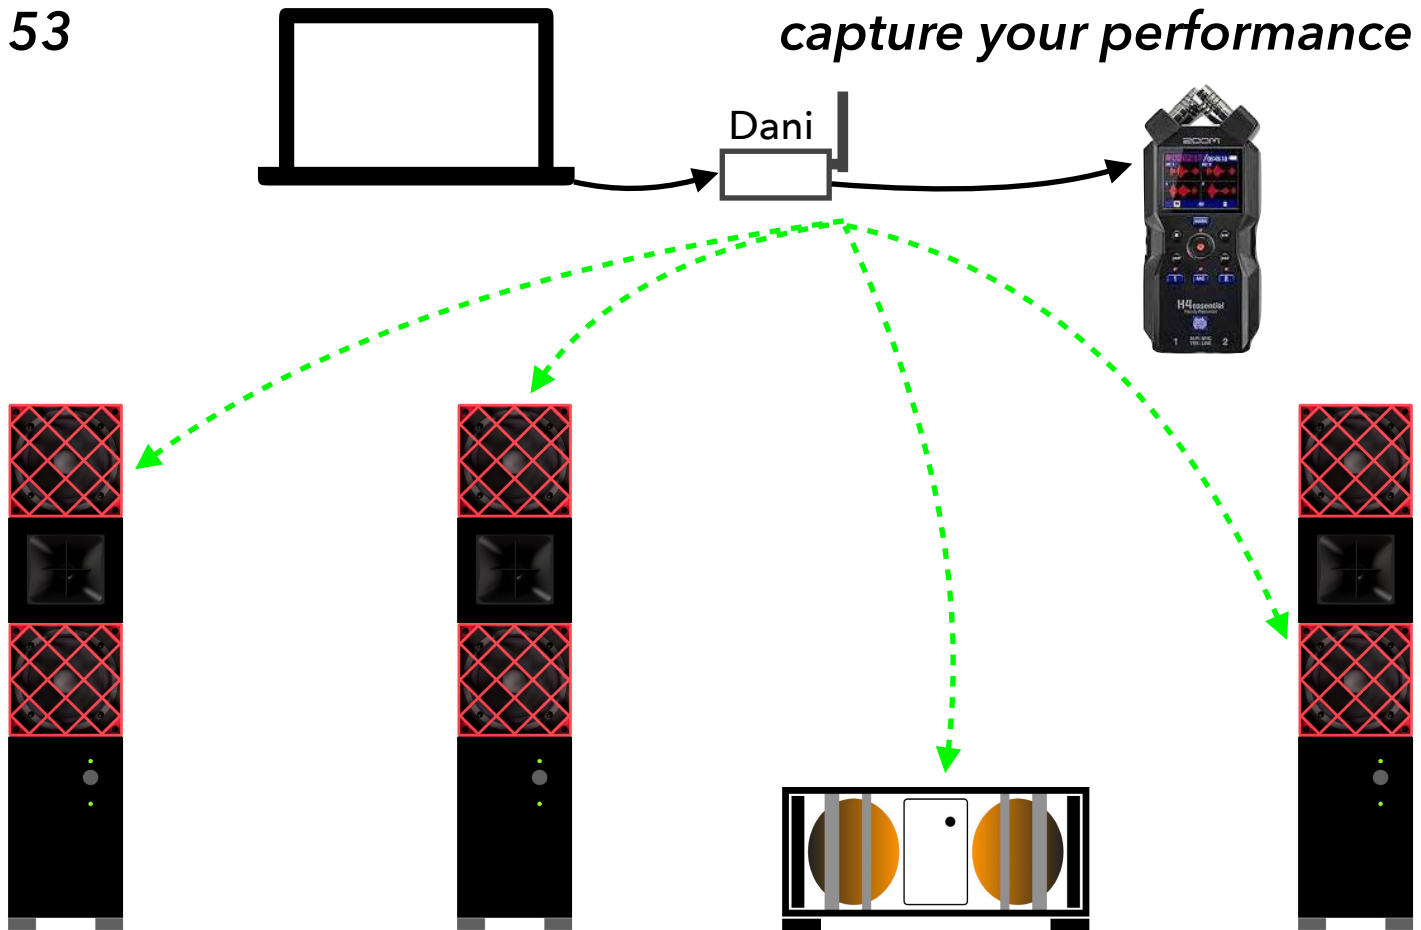


54

or send the audio to your videographer

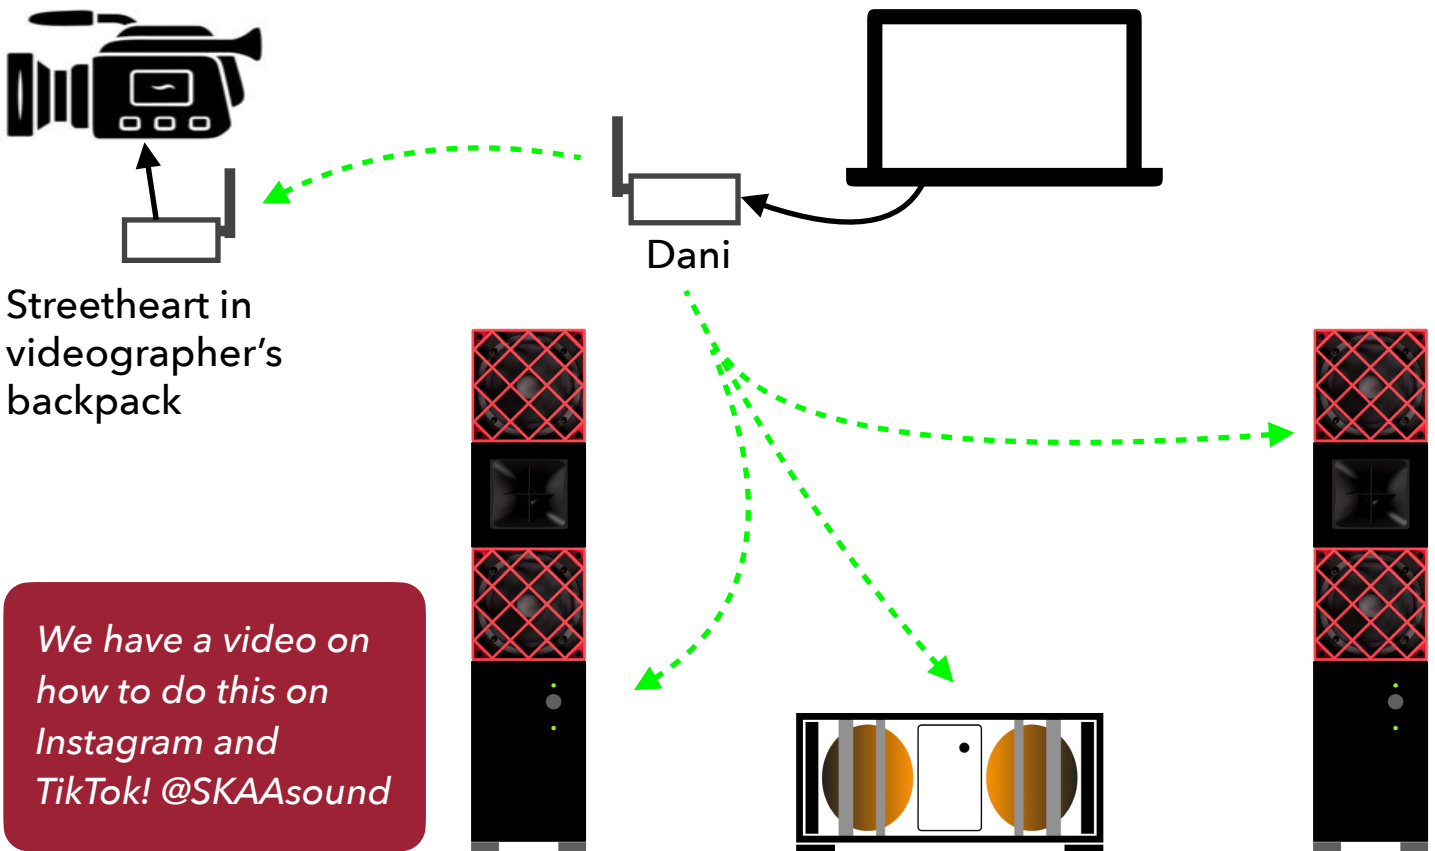

55


the Daniless DJ

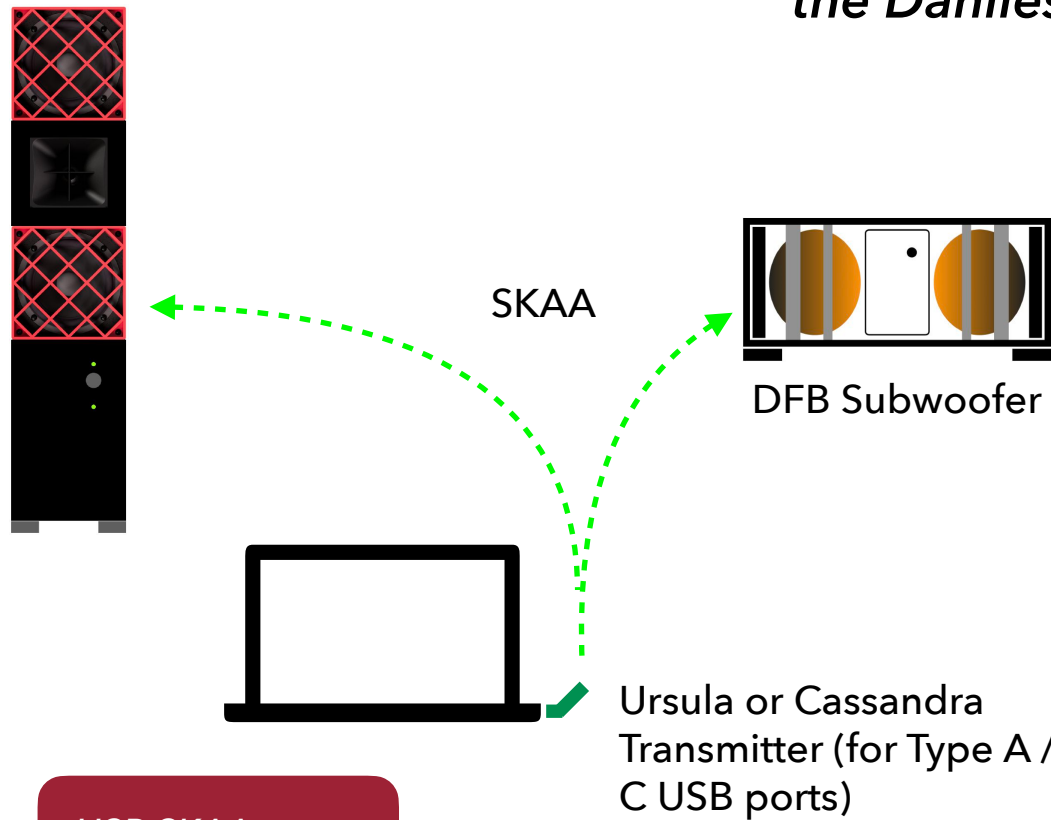

*USB SKAA
Transmitters are
super handy for
smaller rooms*


56

when more people show up

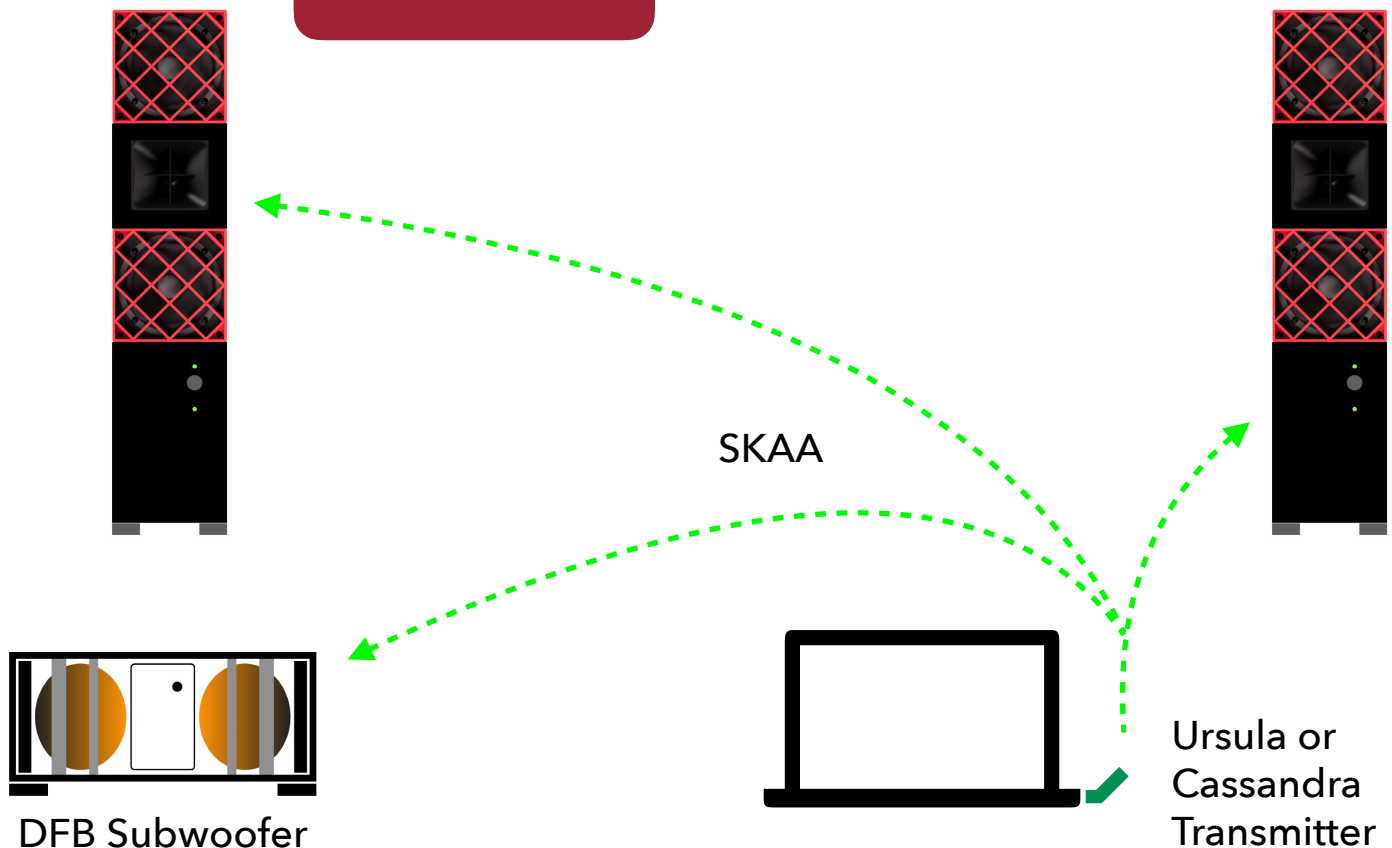


57

house party dominance

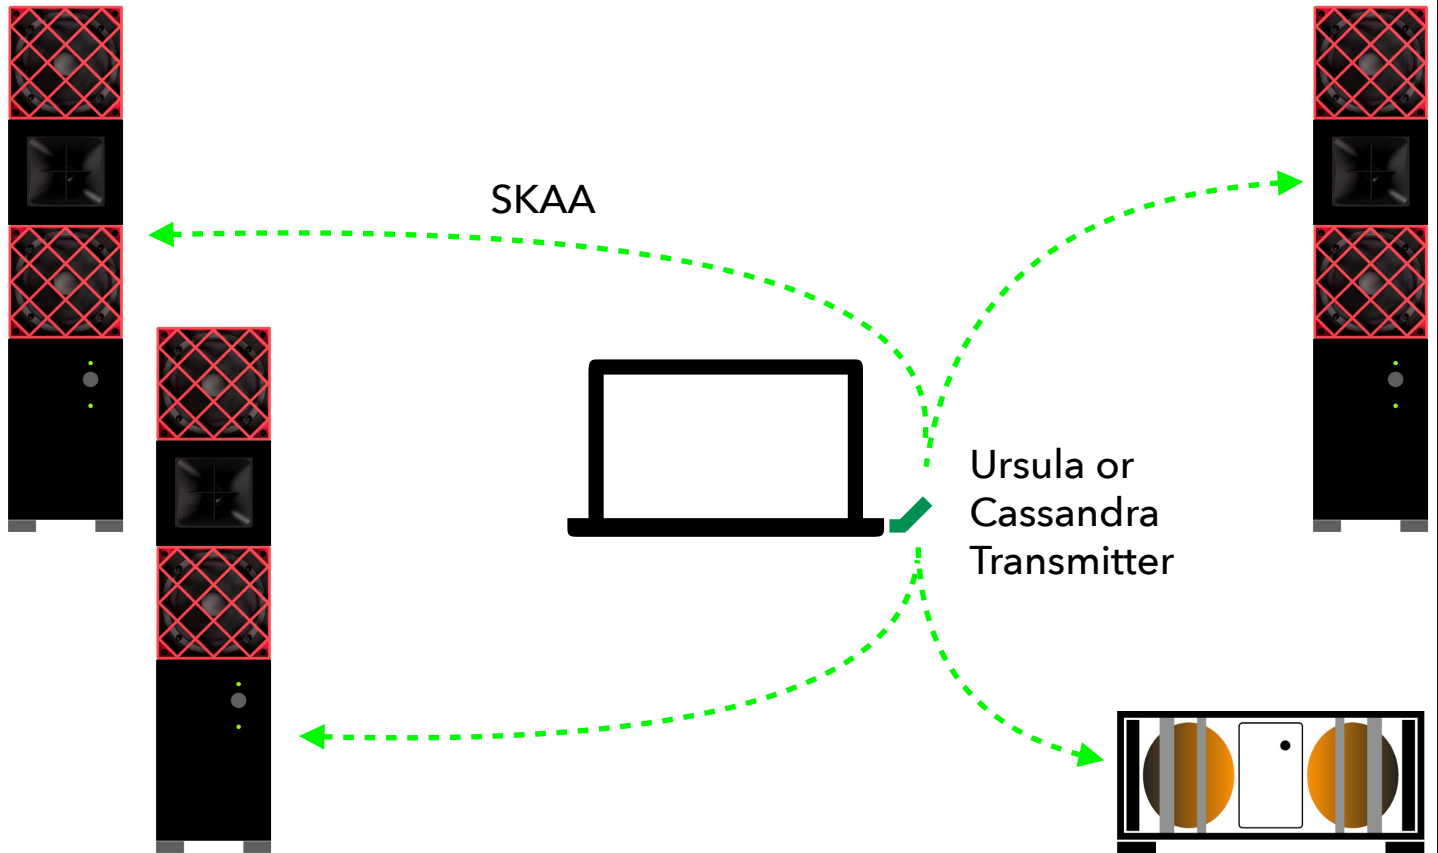

58


small hall dominance

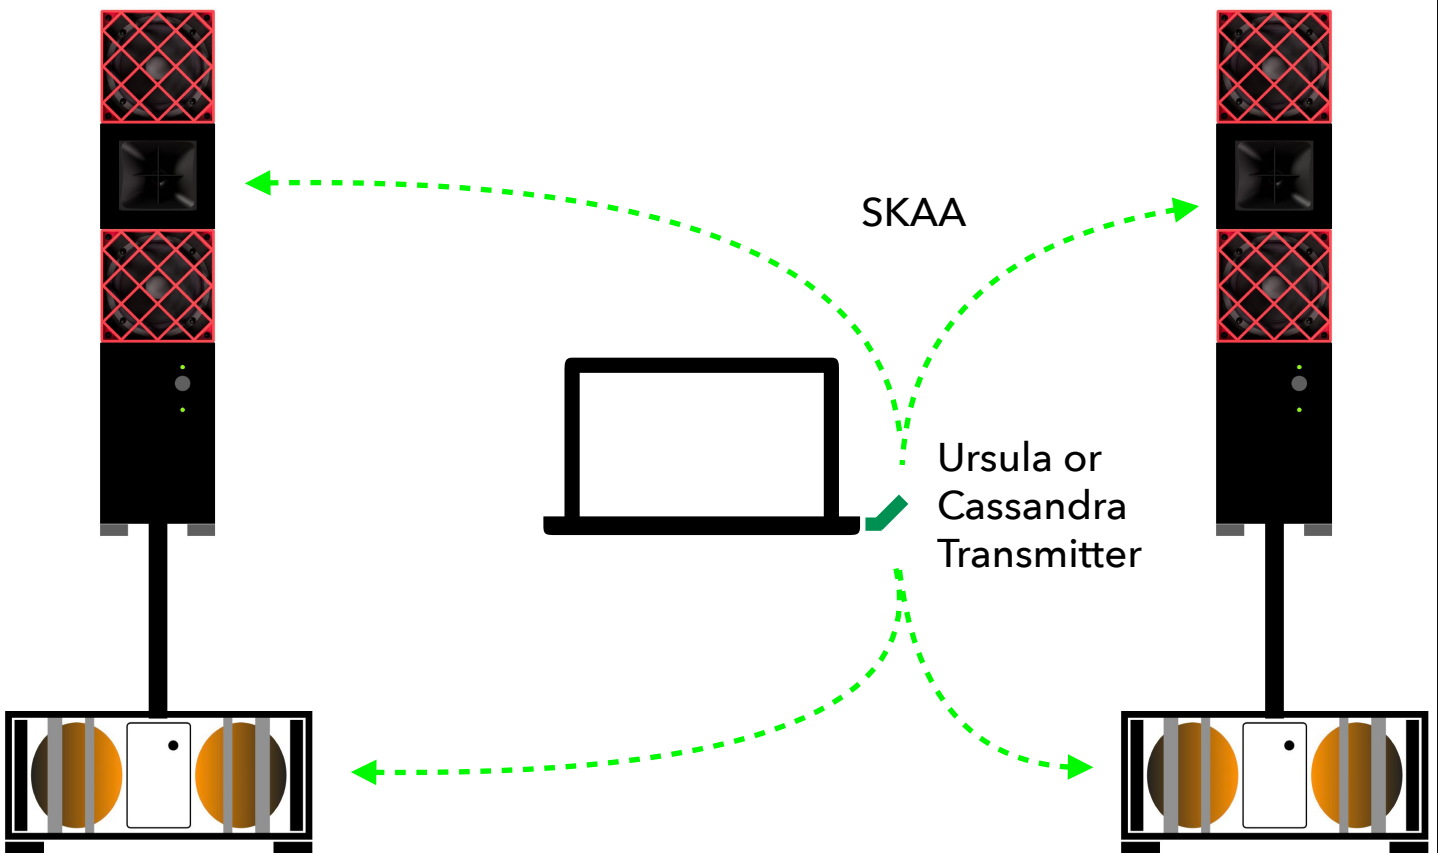

Studio & Recording


59

what, me worry about studio cables?

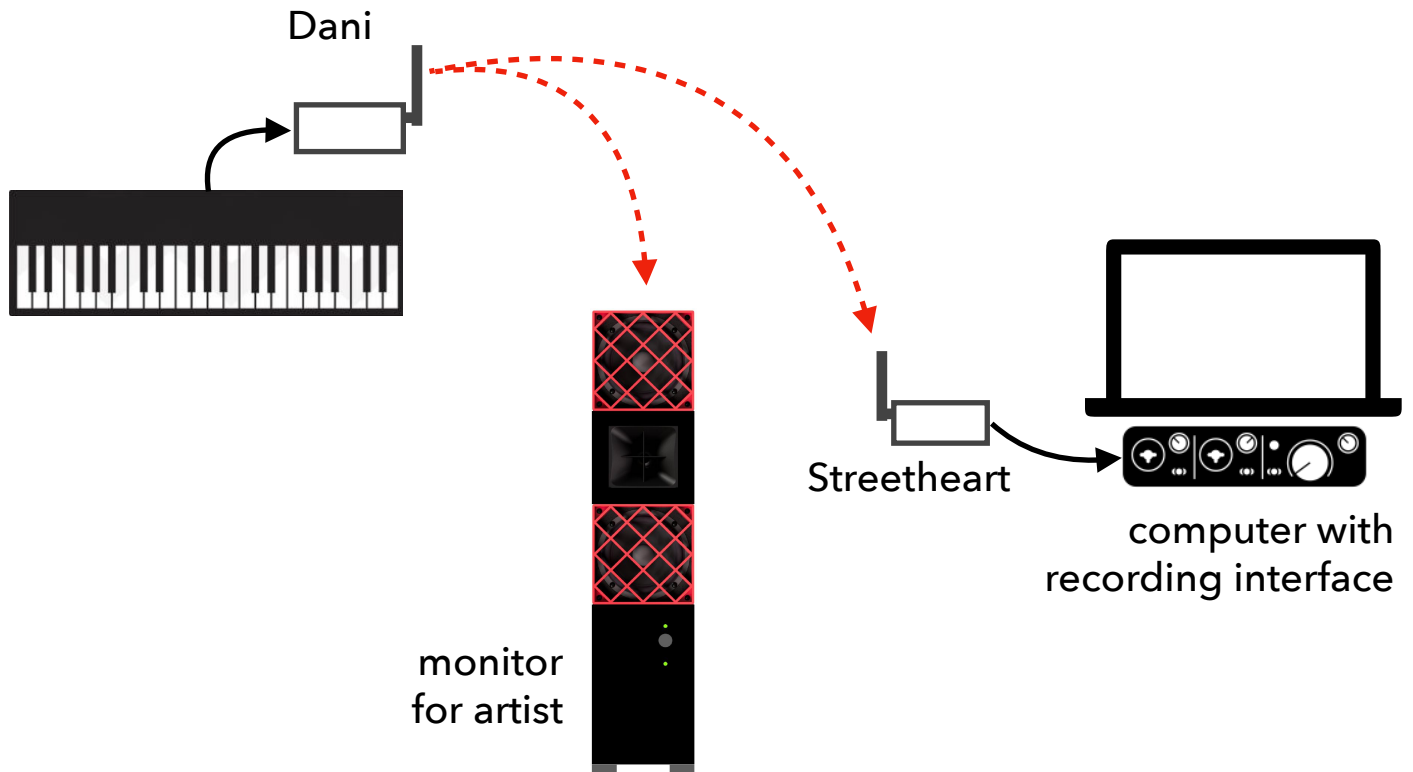


60

what, me wire up the live room?

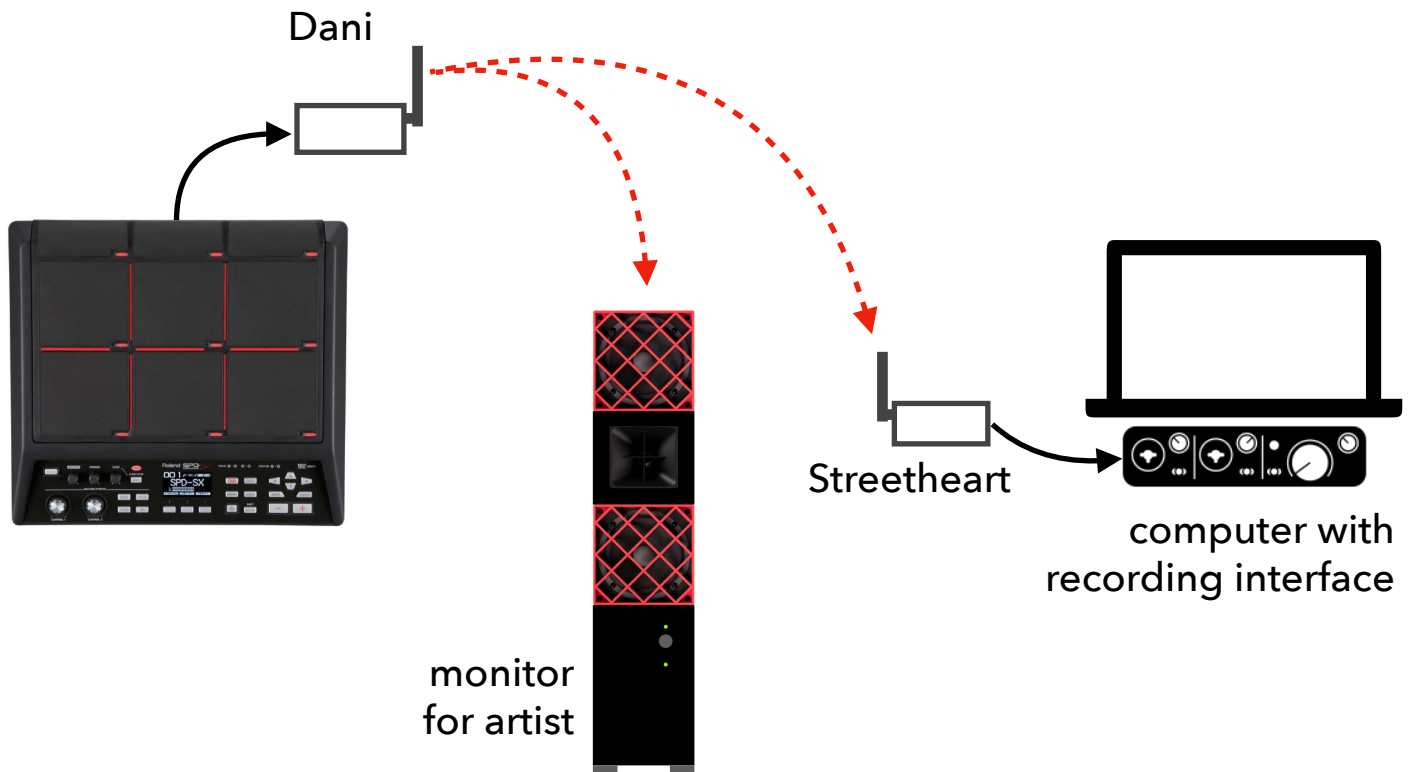


61

DFA monitors

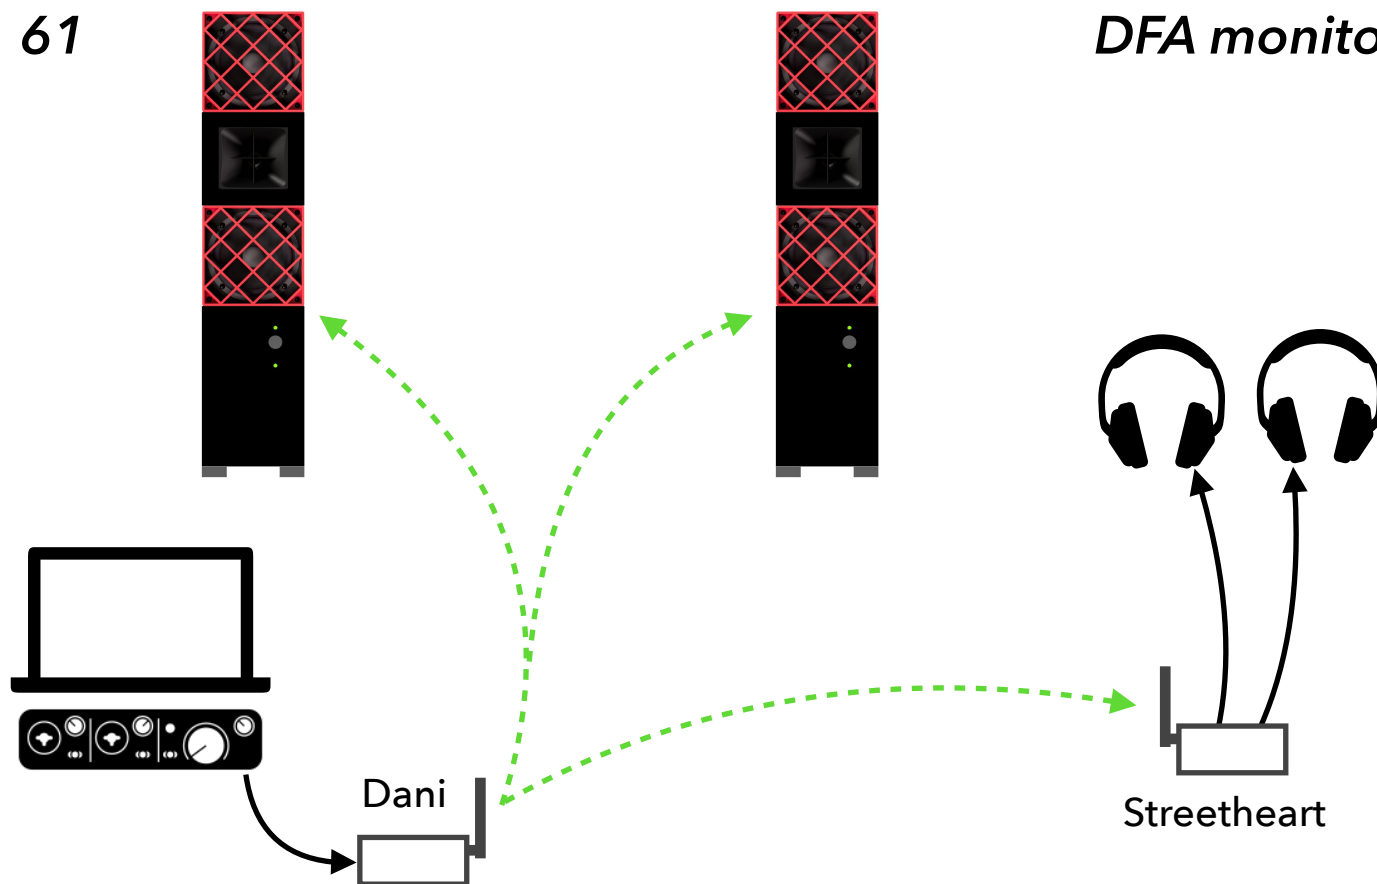


62

add a playback speaker for your live room

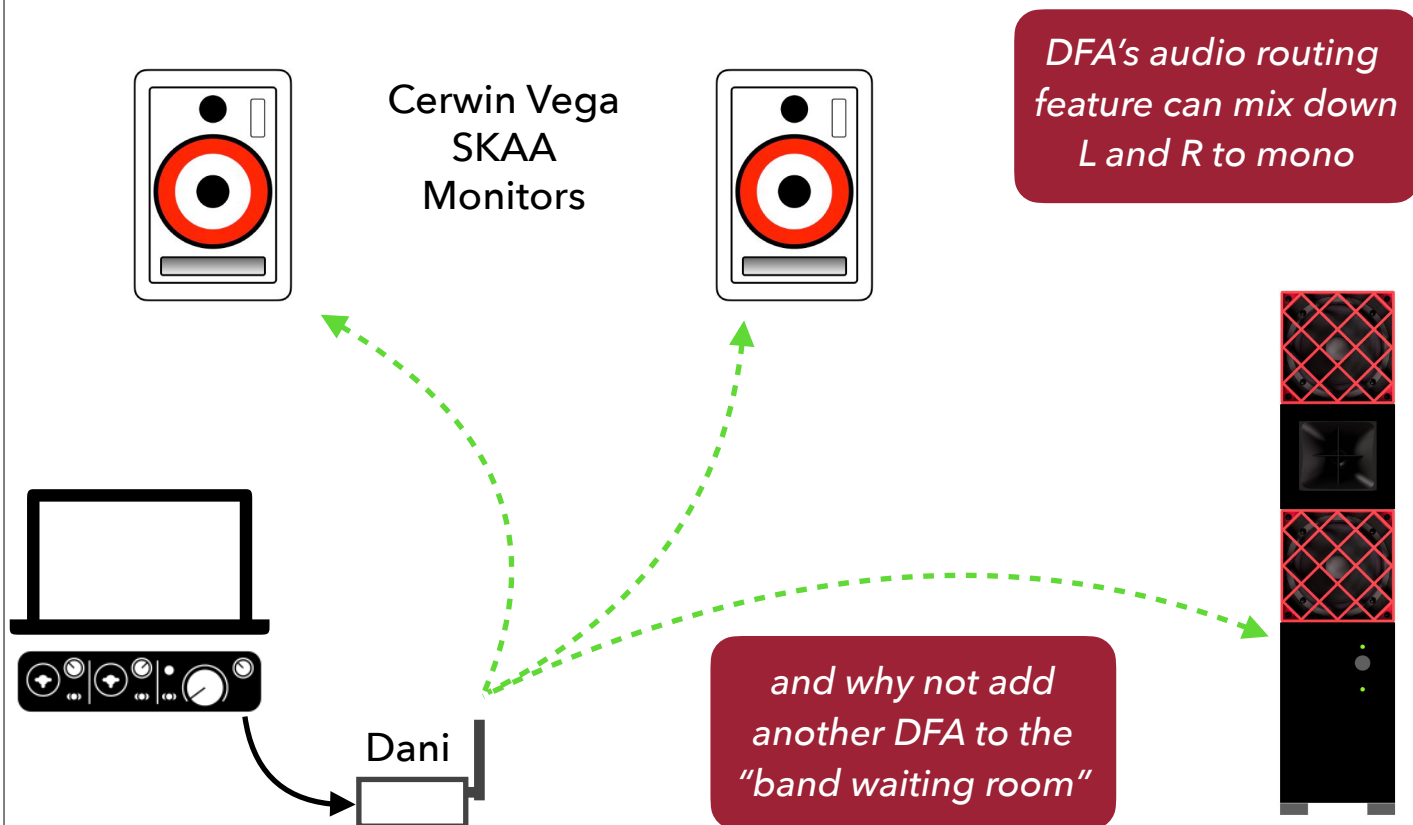


63

cue times two

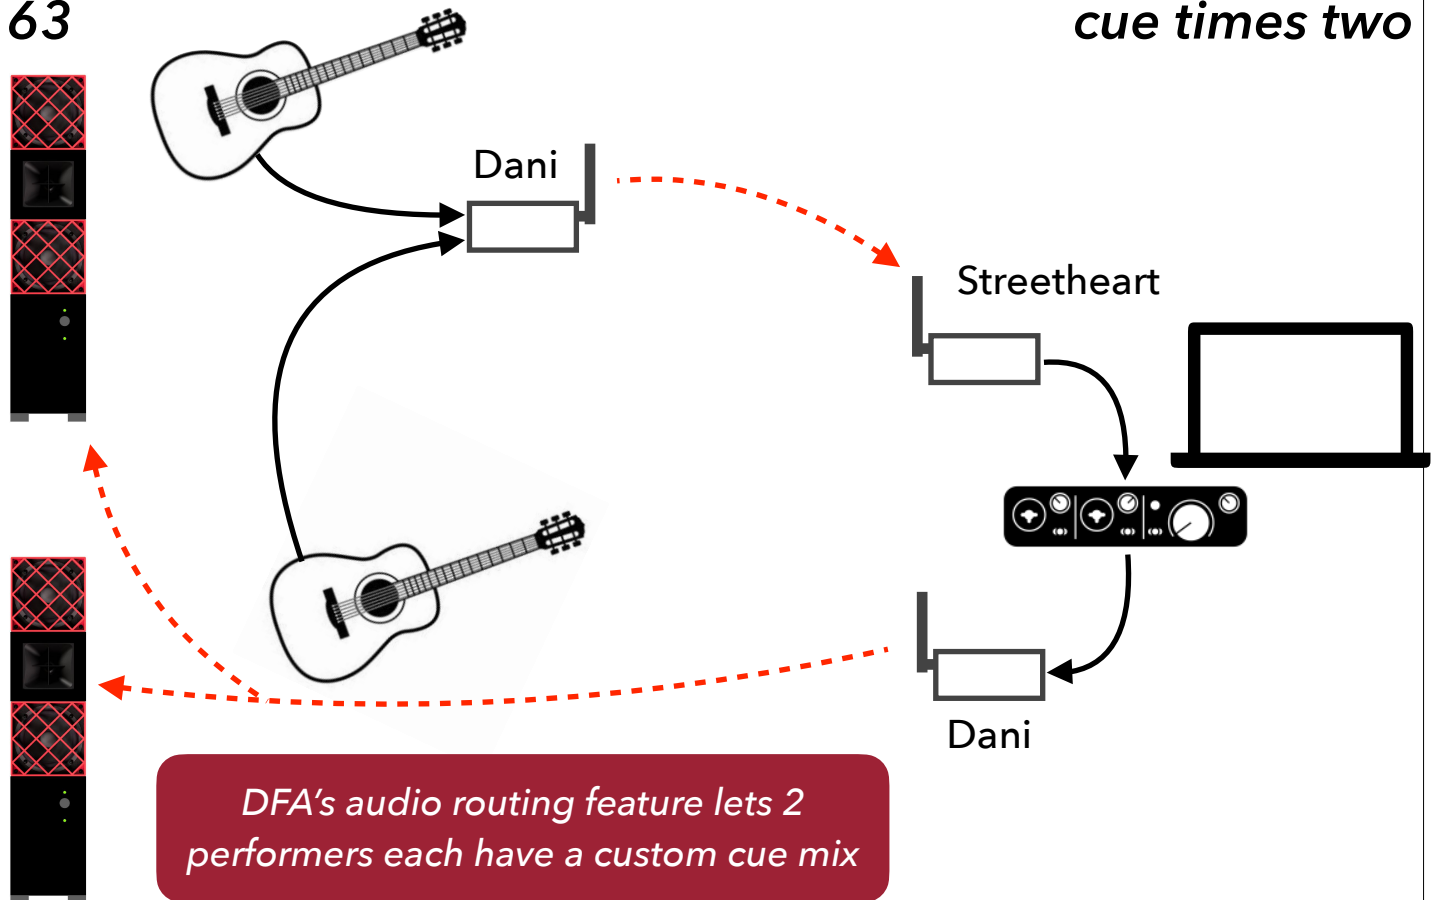


64

dare to do the impossible

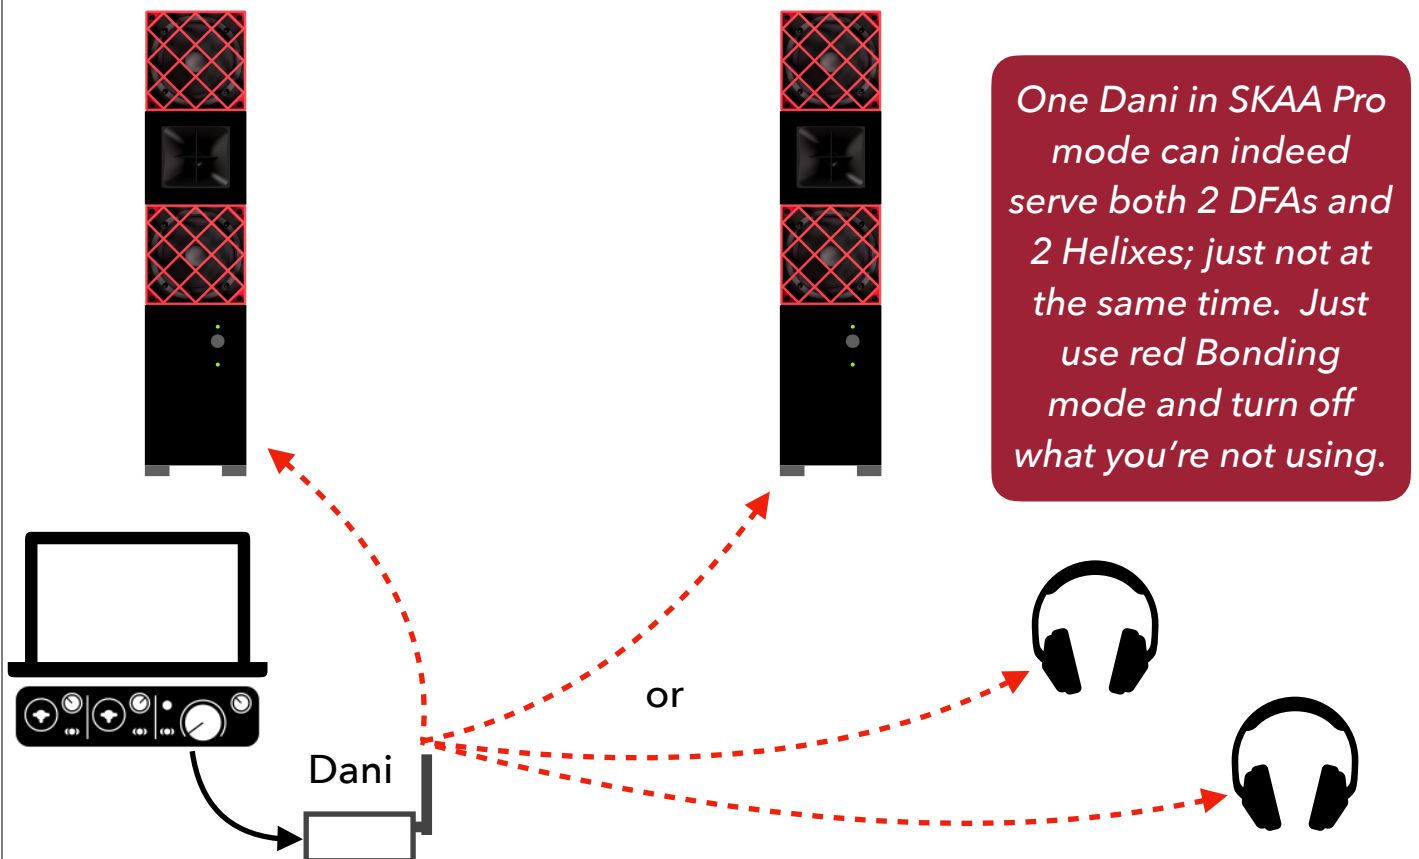


65

classic 2.1 monitoring

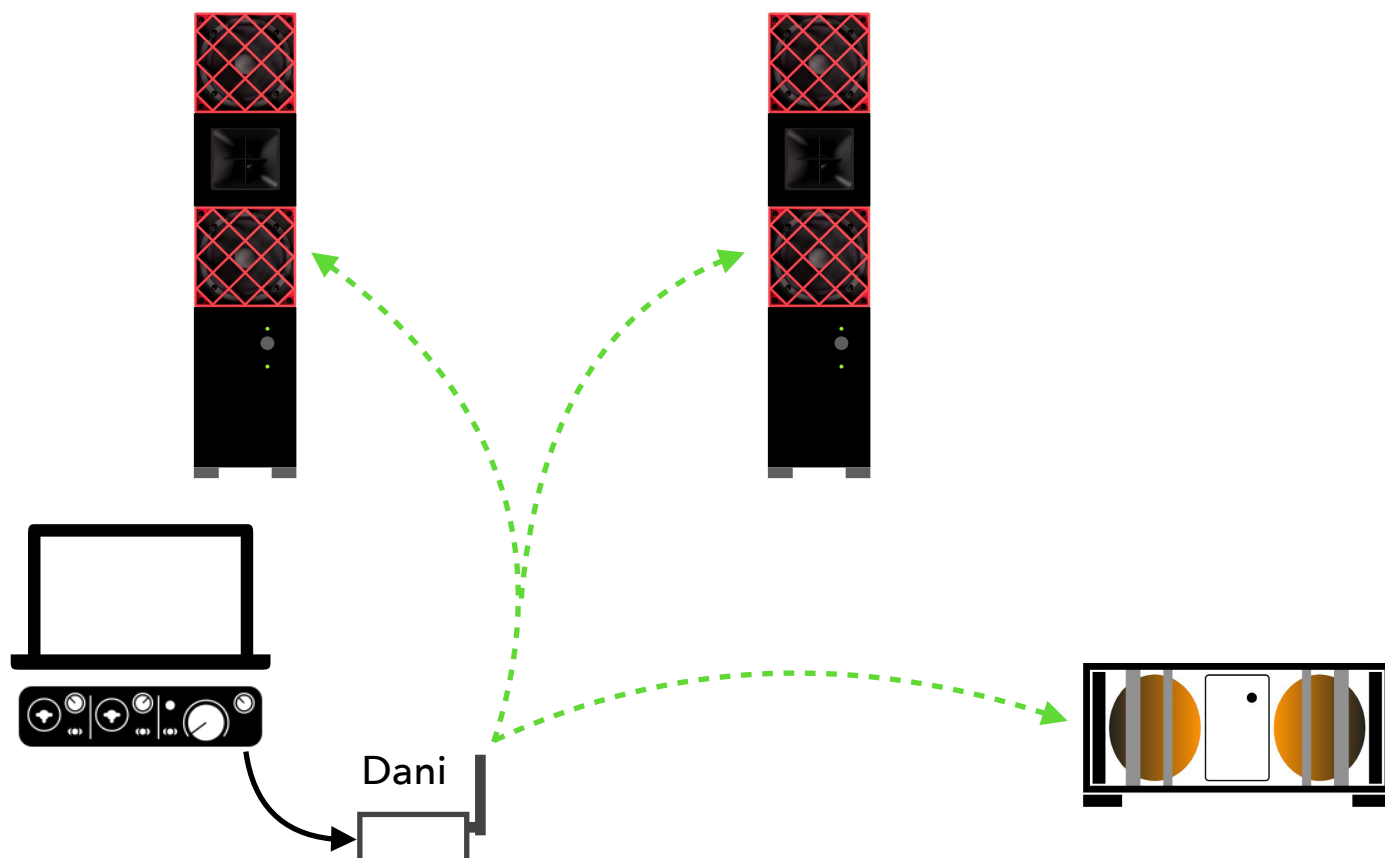


66


feed DFB from its own DAW output; like a boss

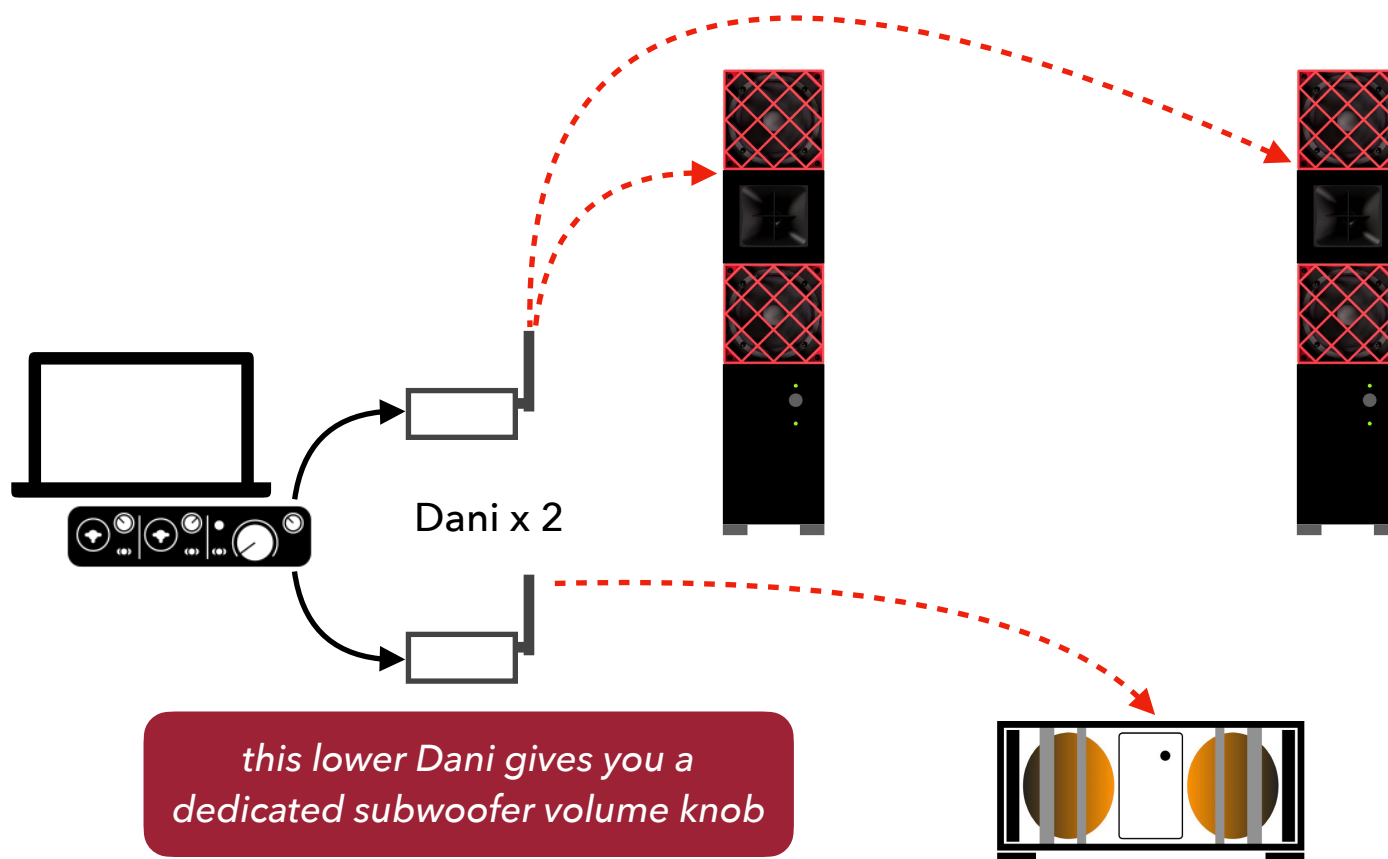

67

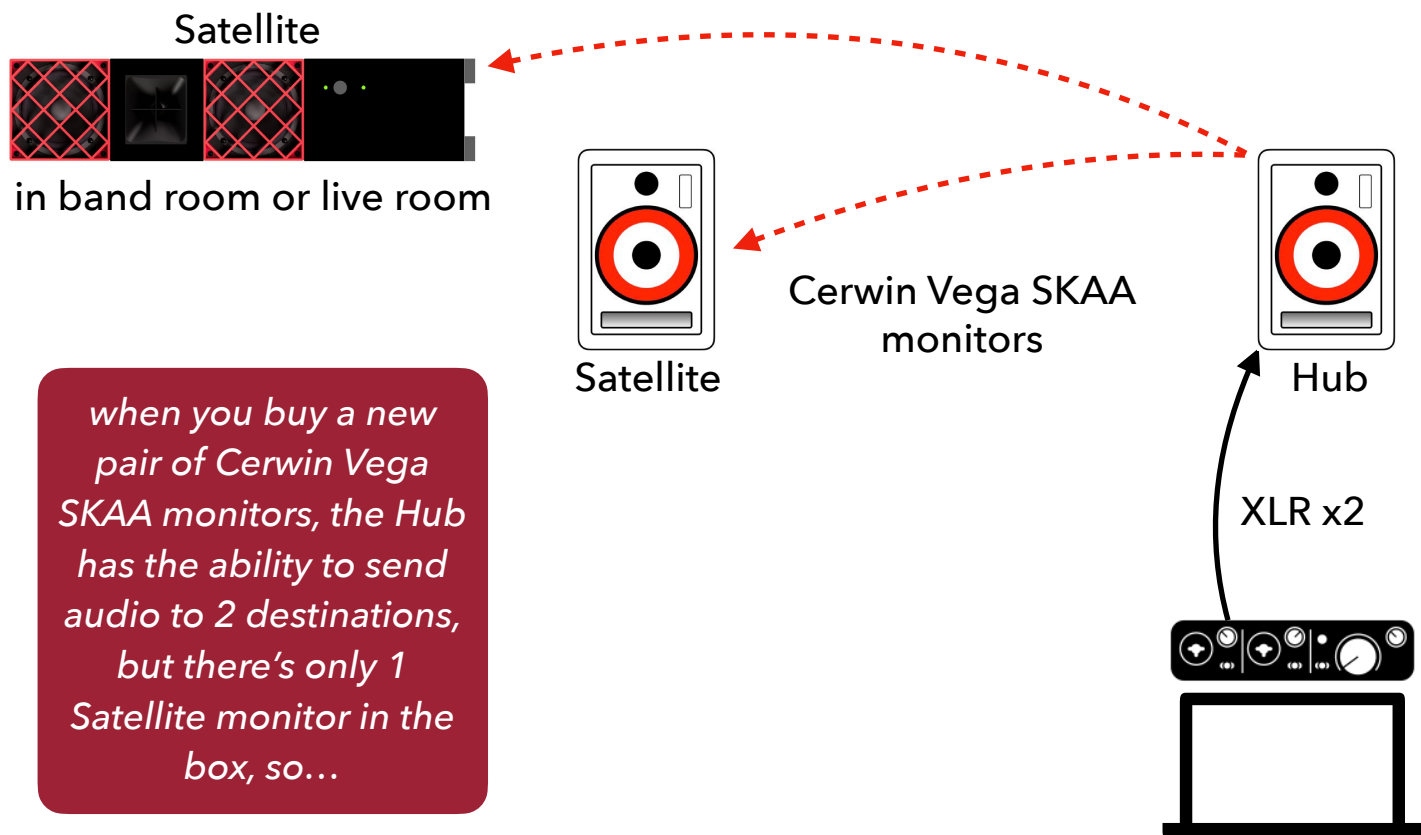
just put those new monitors "on credit"

68

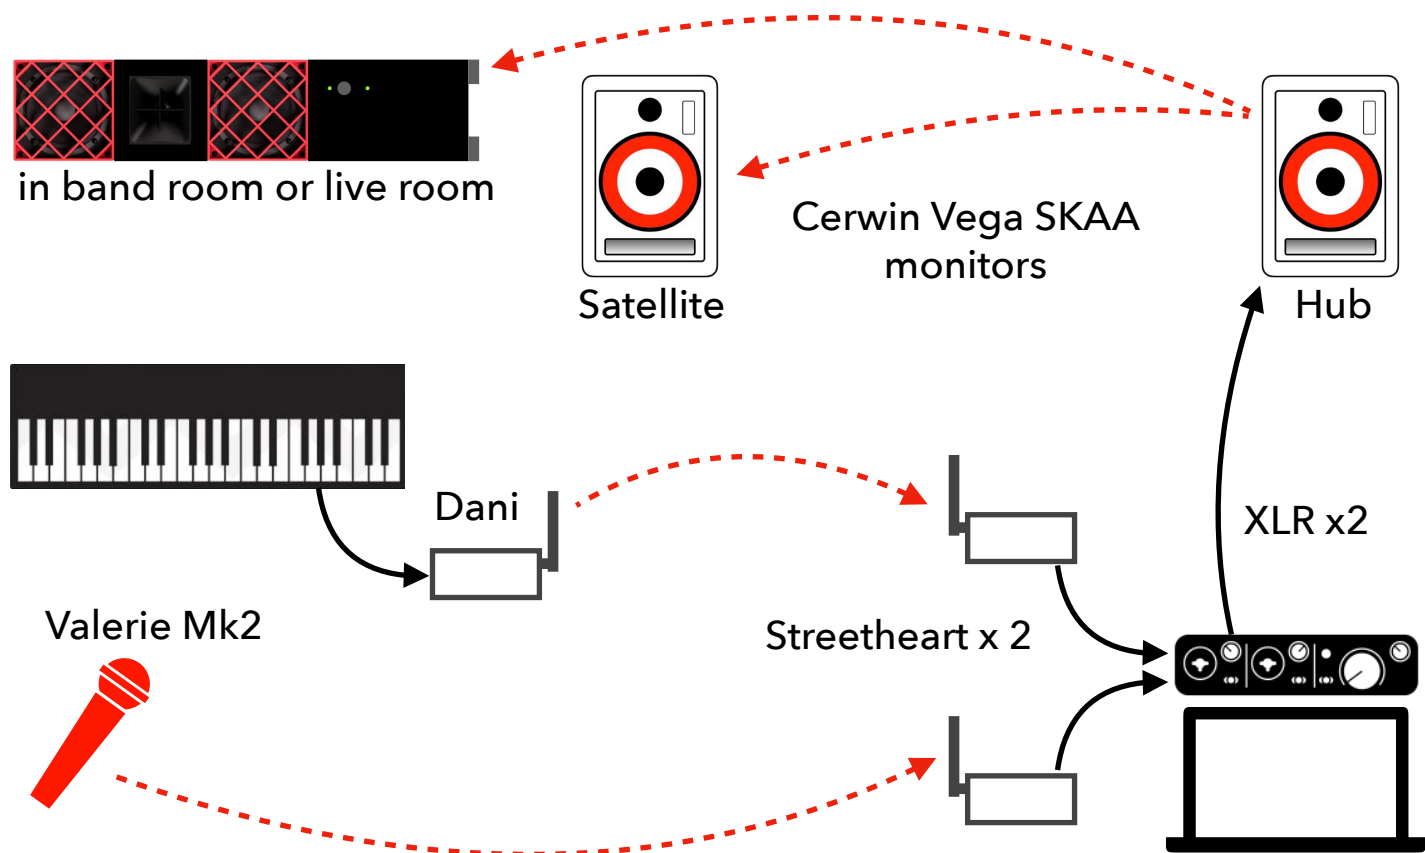add wireless recording


69

USB Transmitter for monitoring

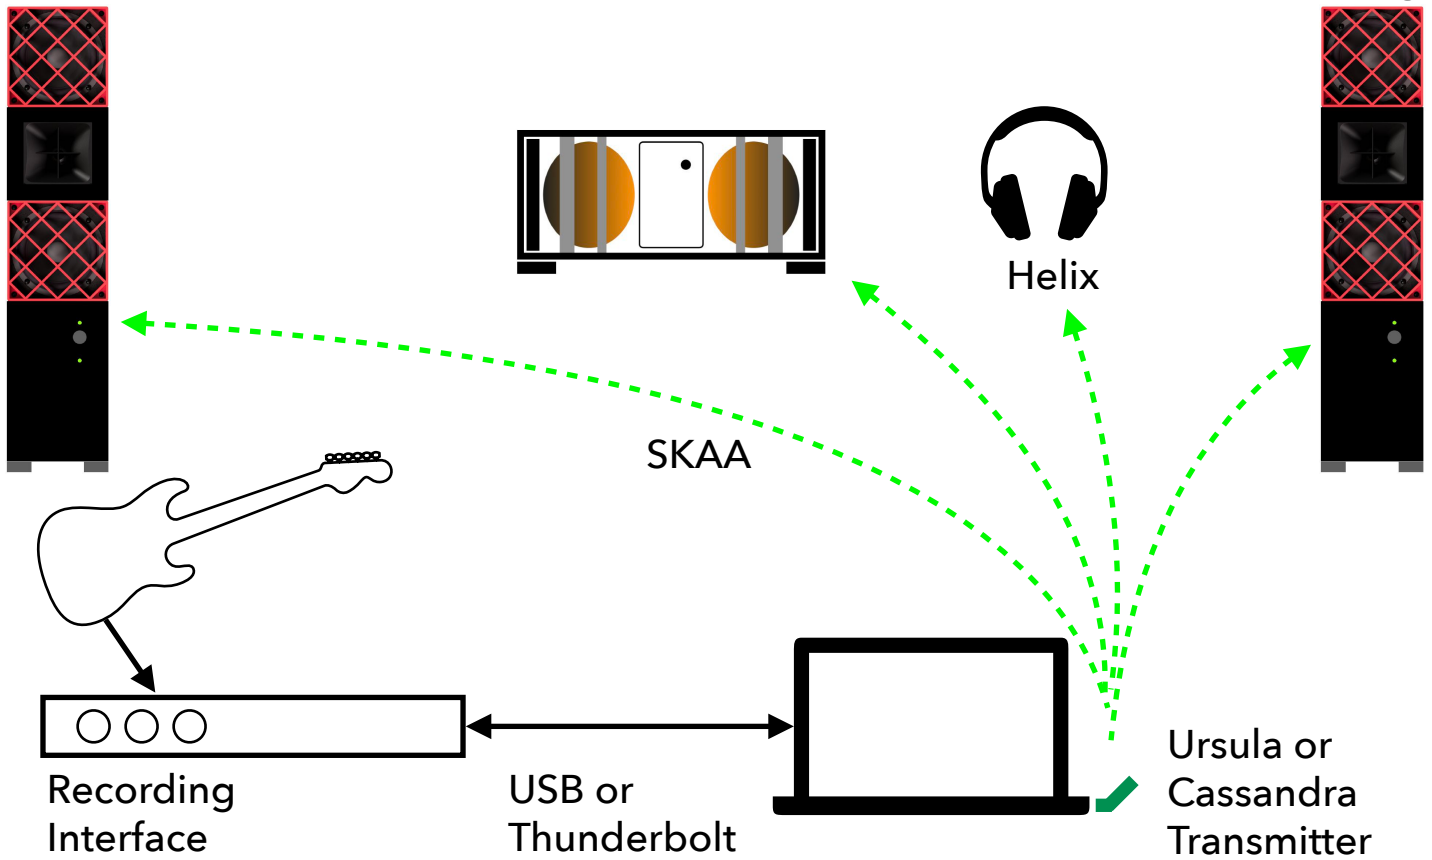


70


or drop latency like so

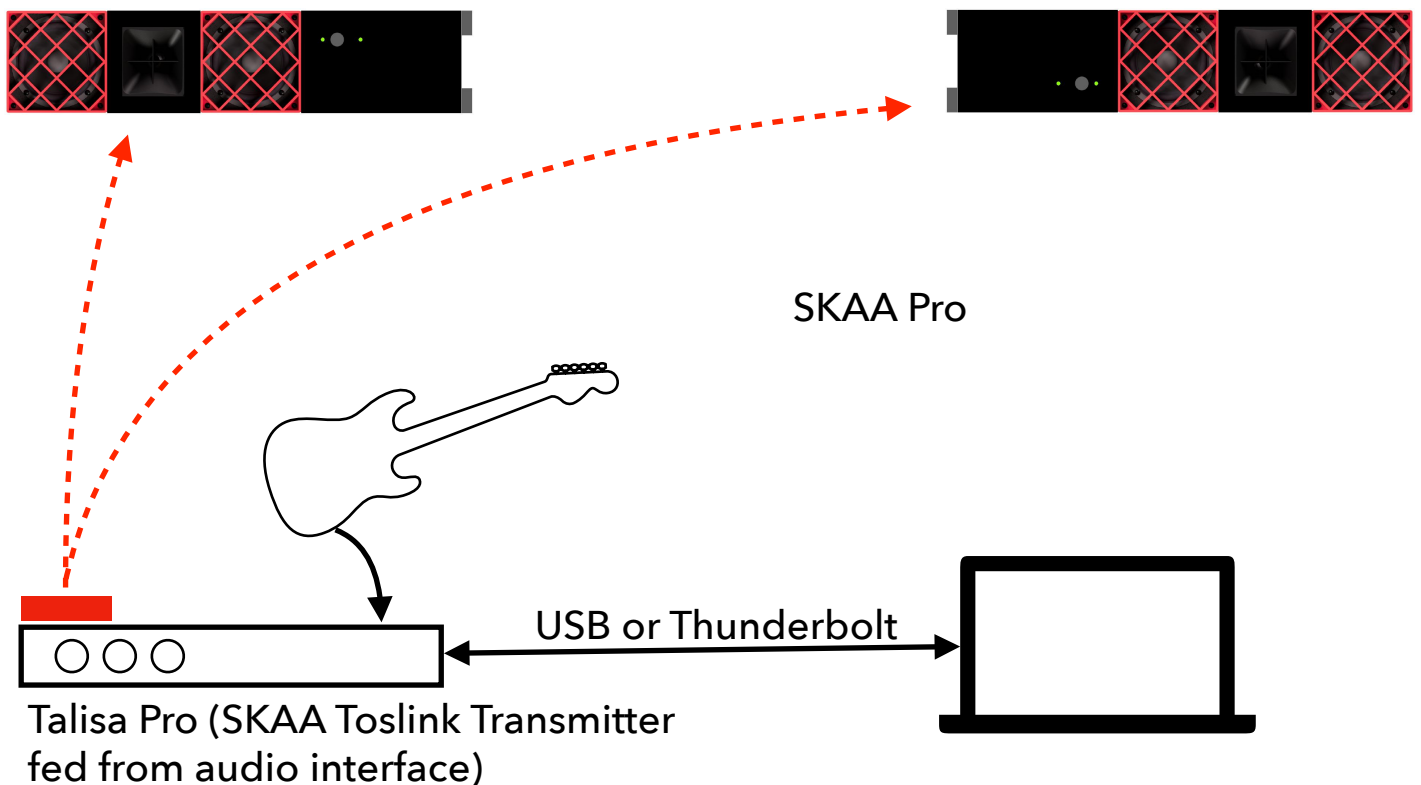

71

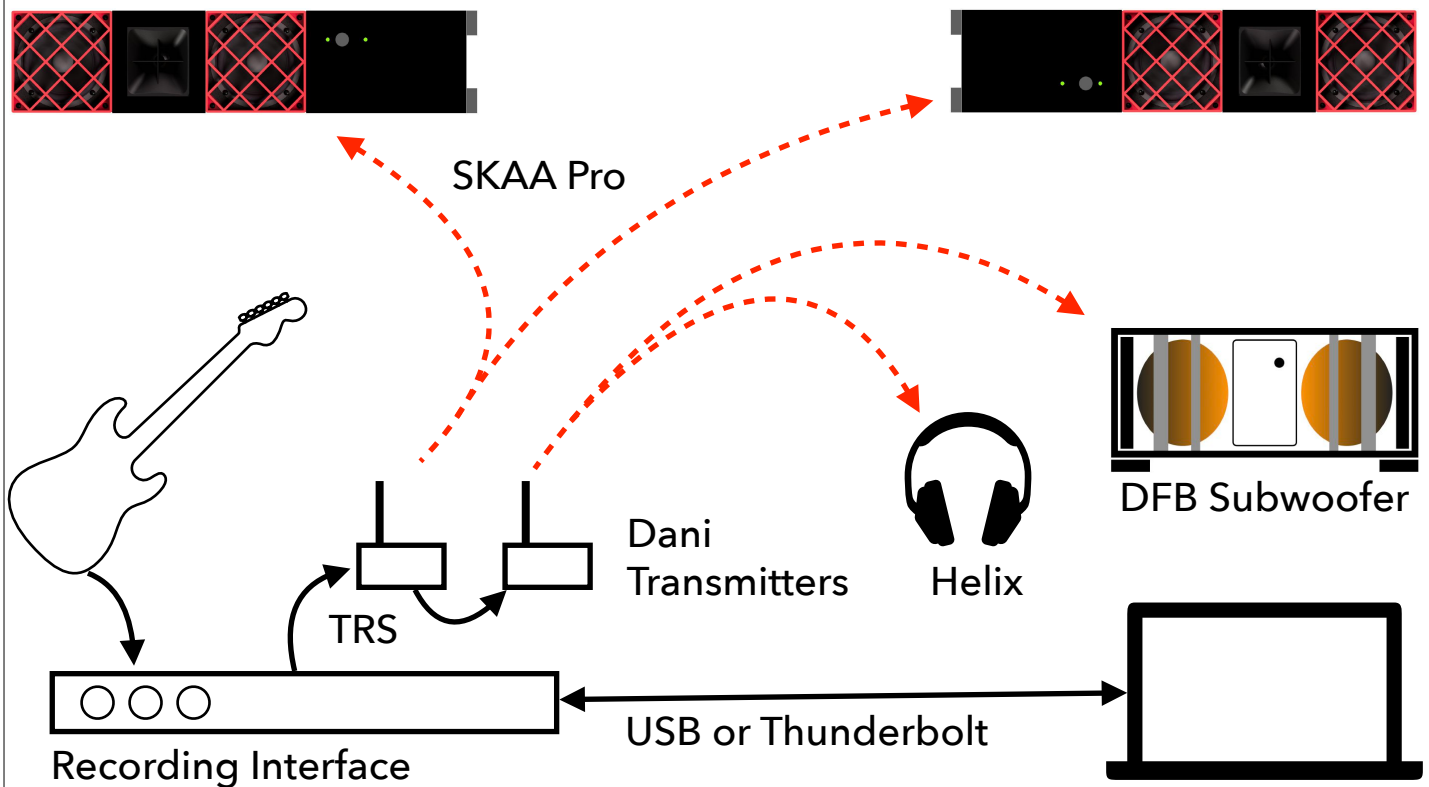... or go with fully wireless


72

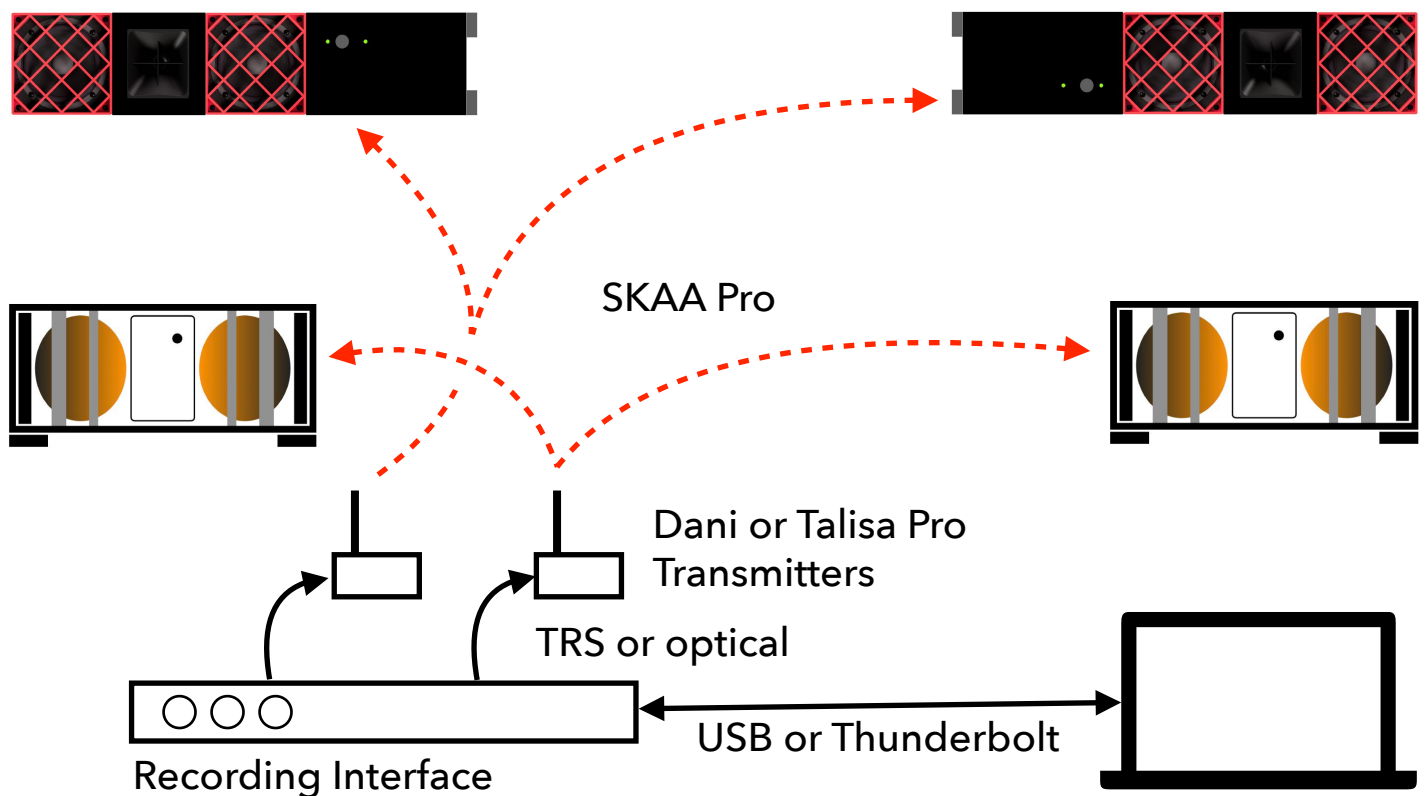dual subs fed by separate DAW outputs

PA & Live Sound


73

wireless PA for live performance

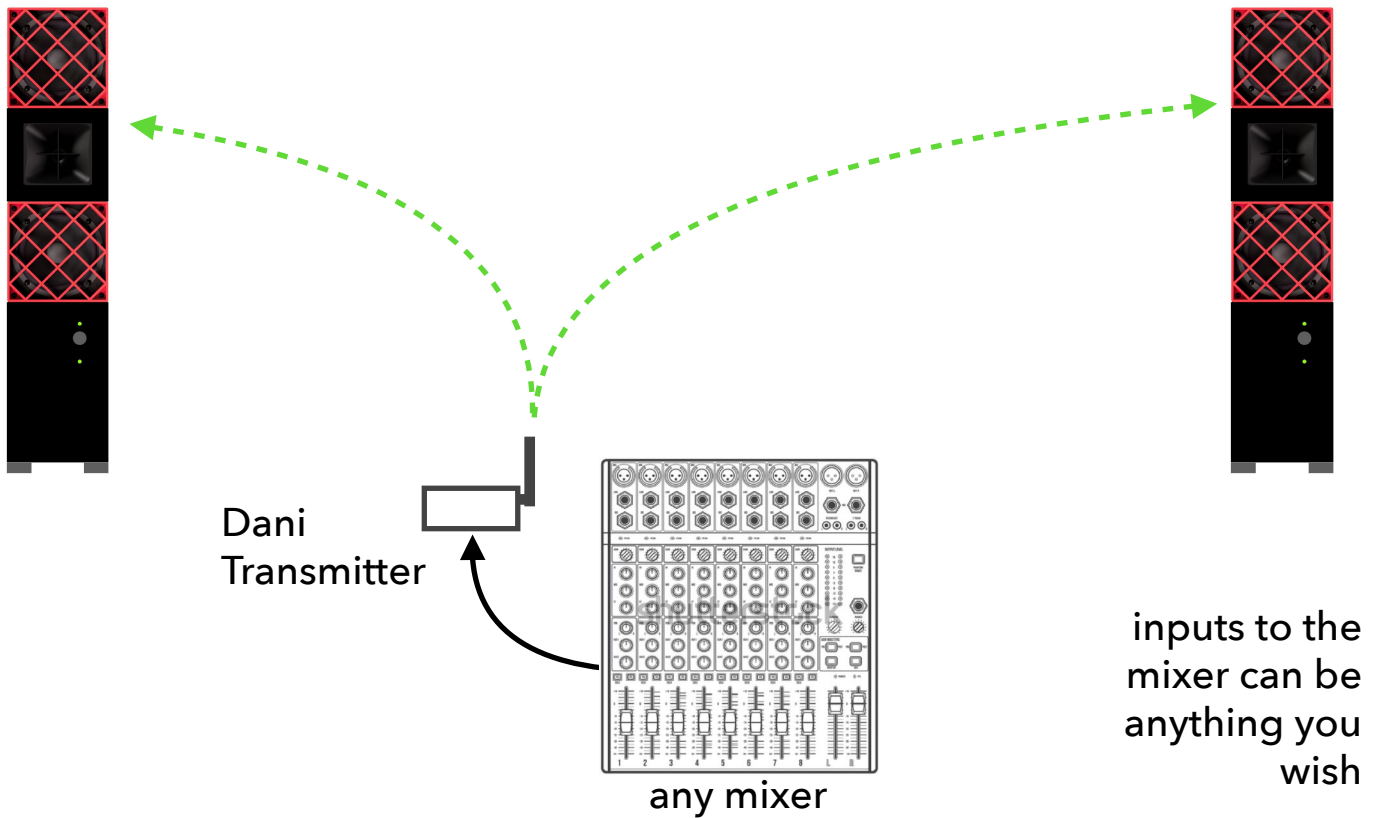


74

... add a sub

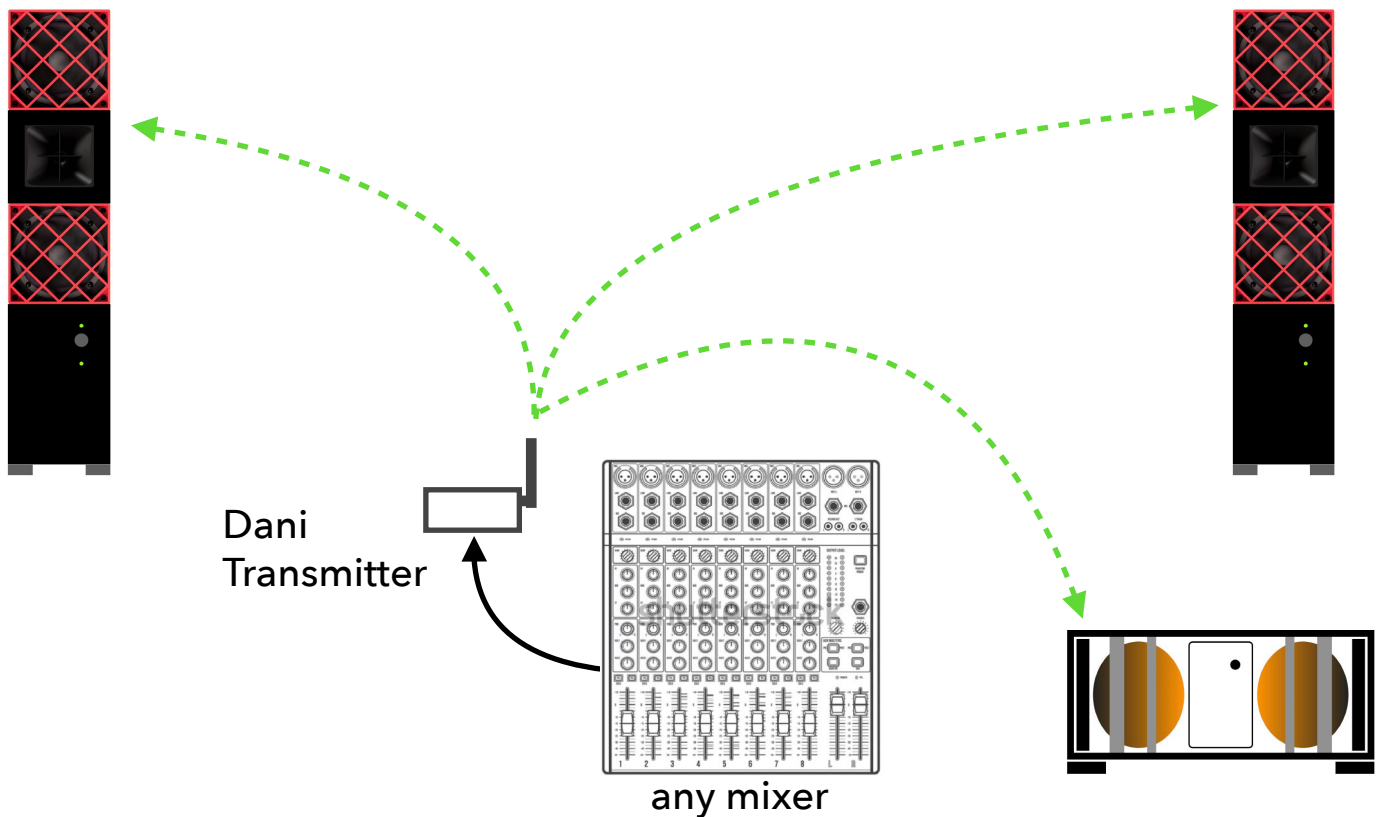


75

wireless PA with Cerwin Vega mixer

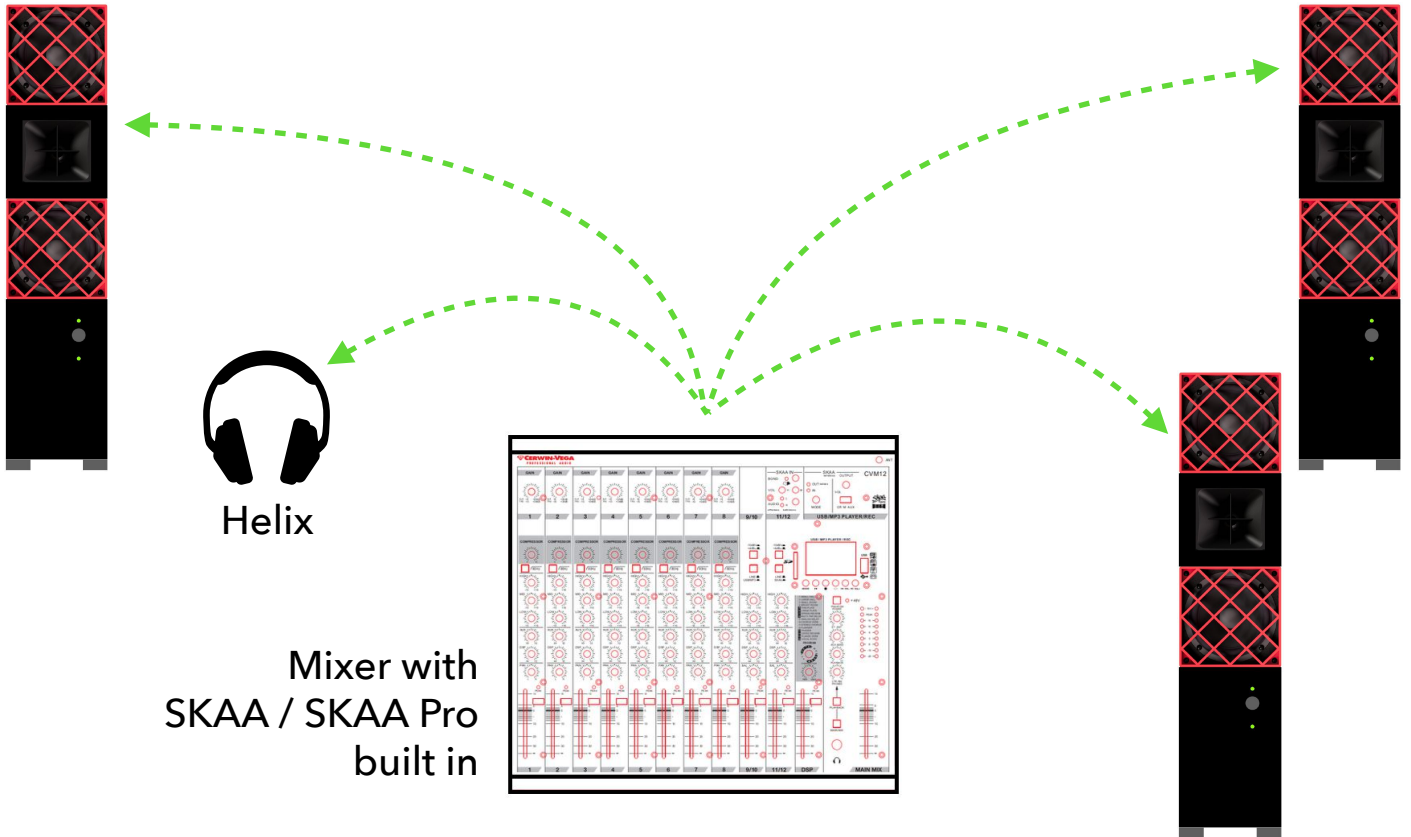


76

wireless PA with Cerwin Vega mixer II

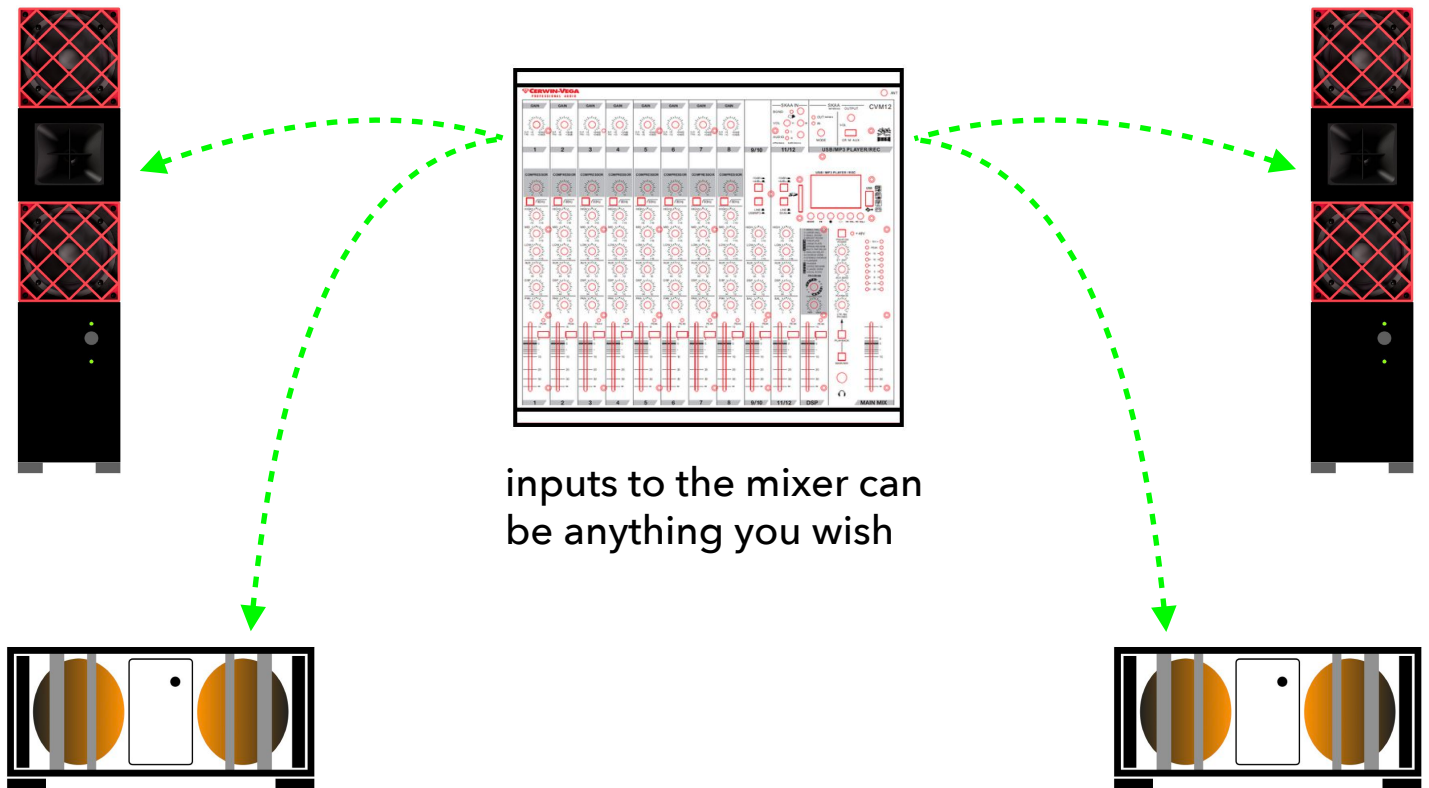


77

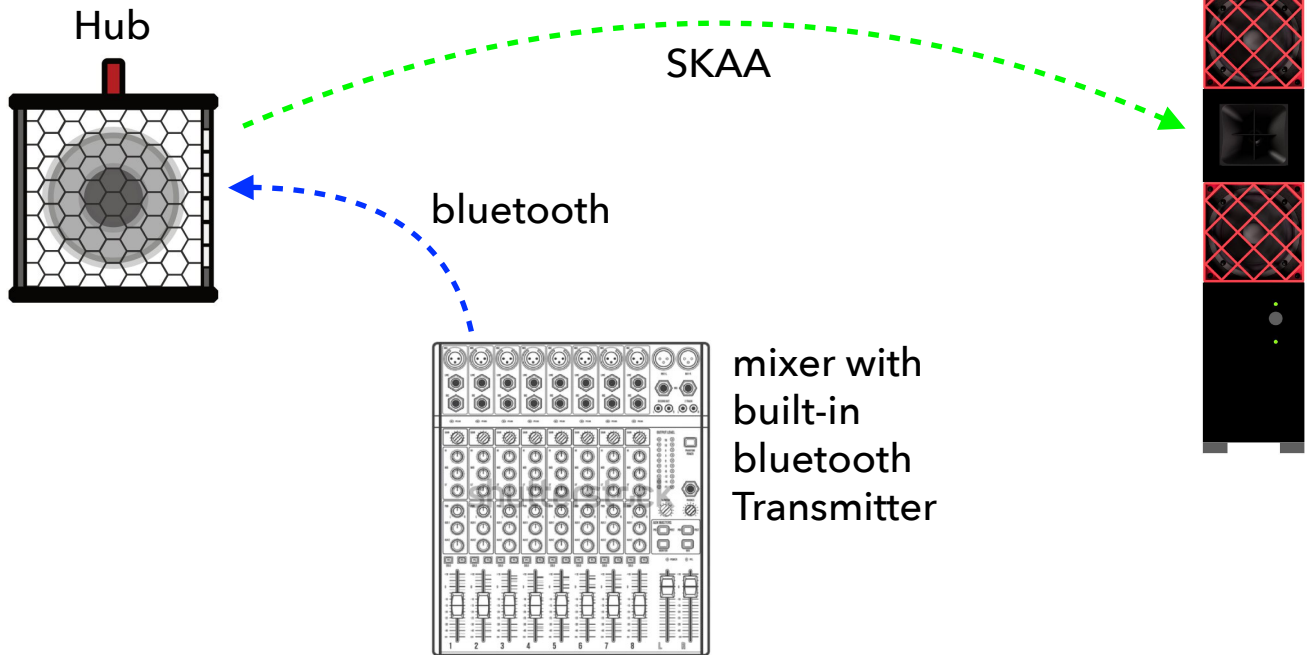bluetooth mixer


don't try these two setups with microphones or live instruments as inputs since long bluetooth latency will be applied to absolutely everything

78

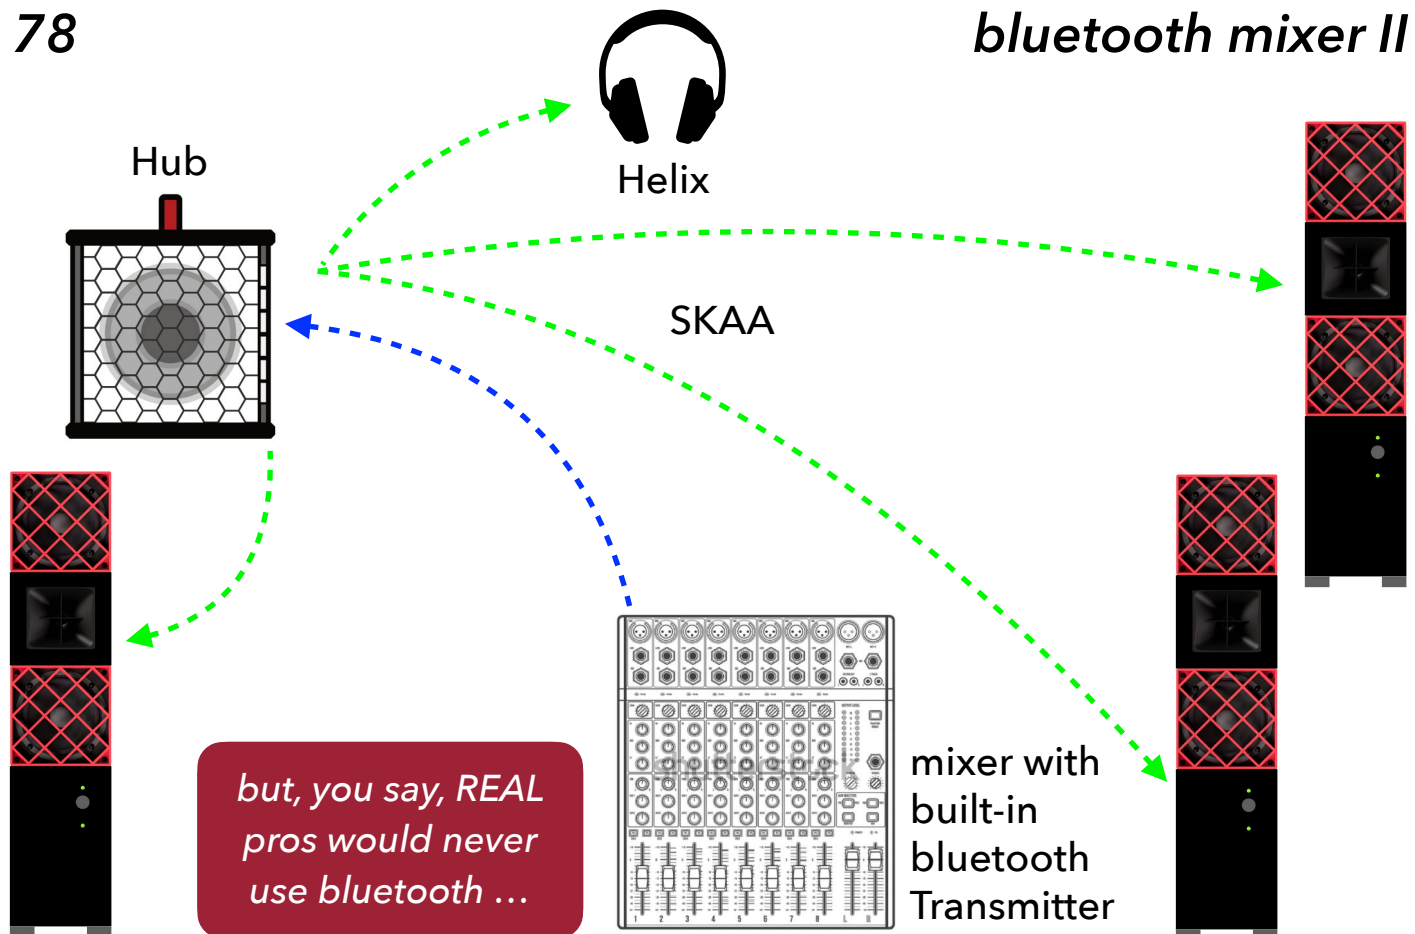bluetooth mixer II


79

pro wireless PA with proper stacks

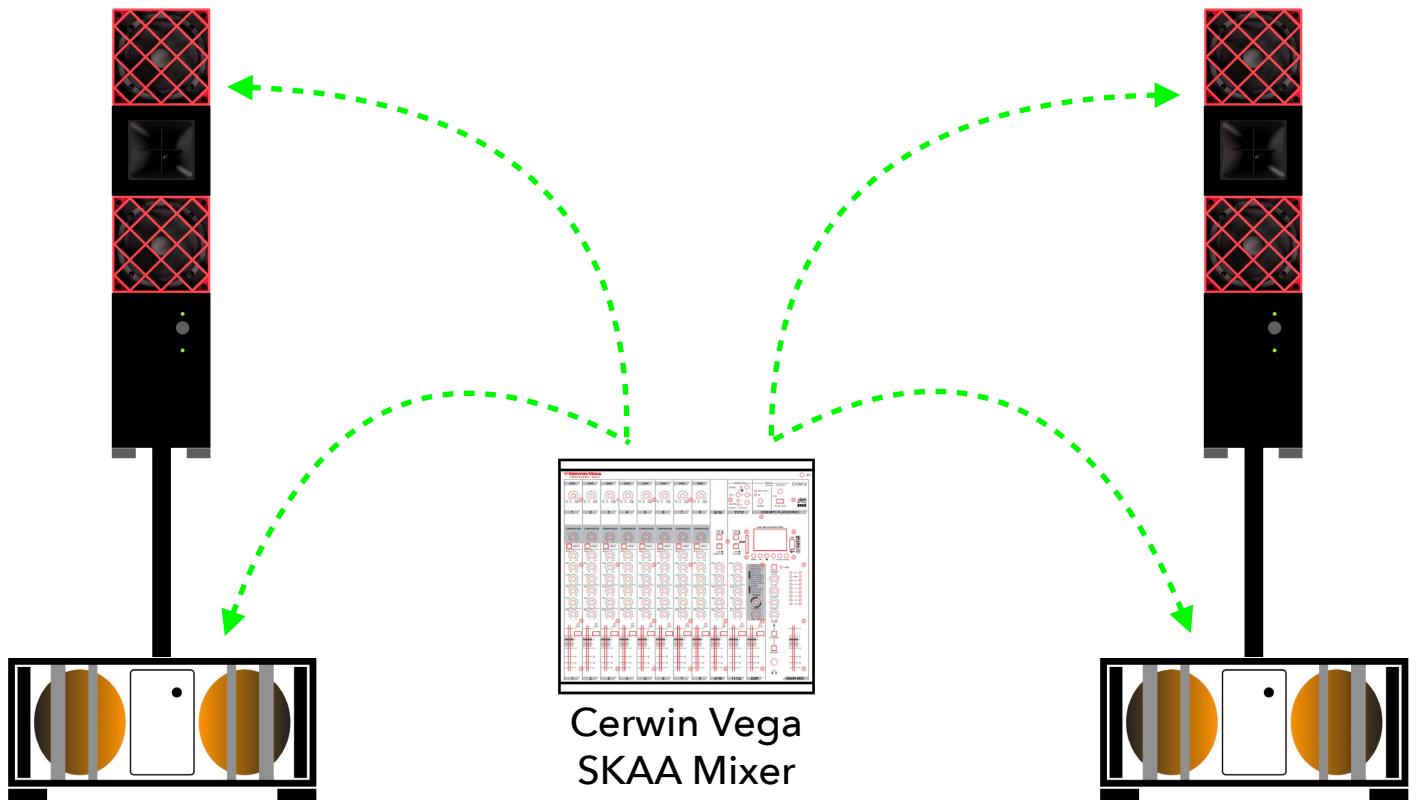


80


run mains and wedges from one Dani

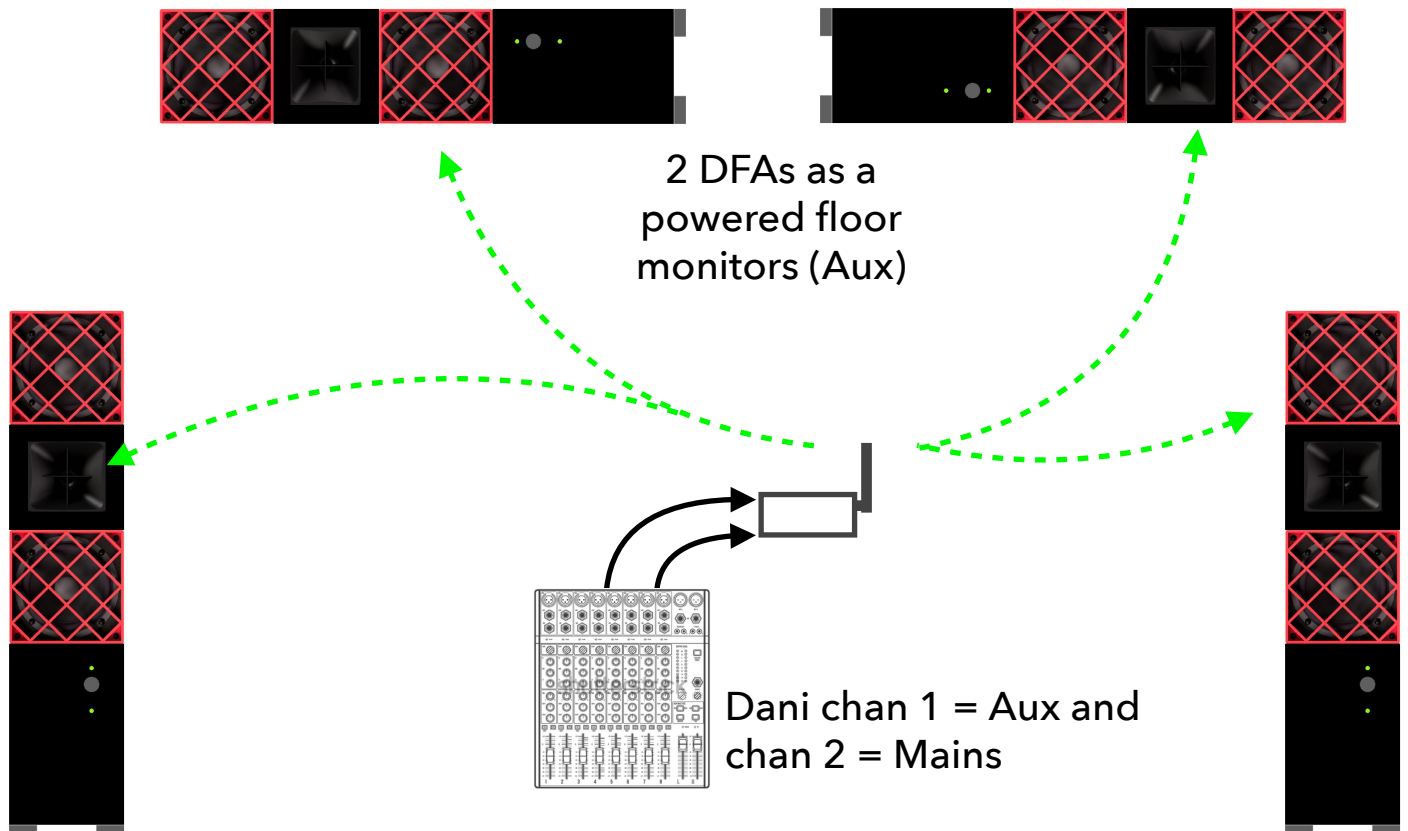


81

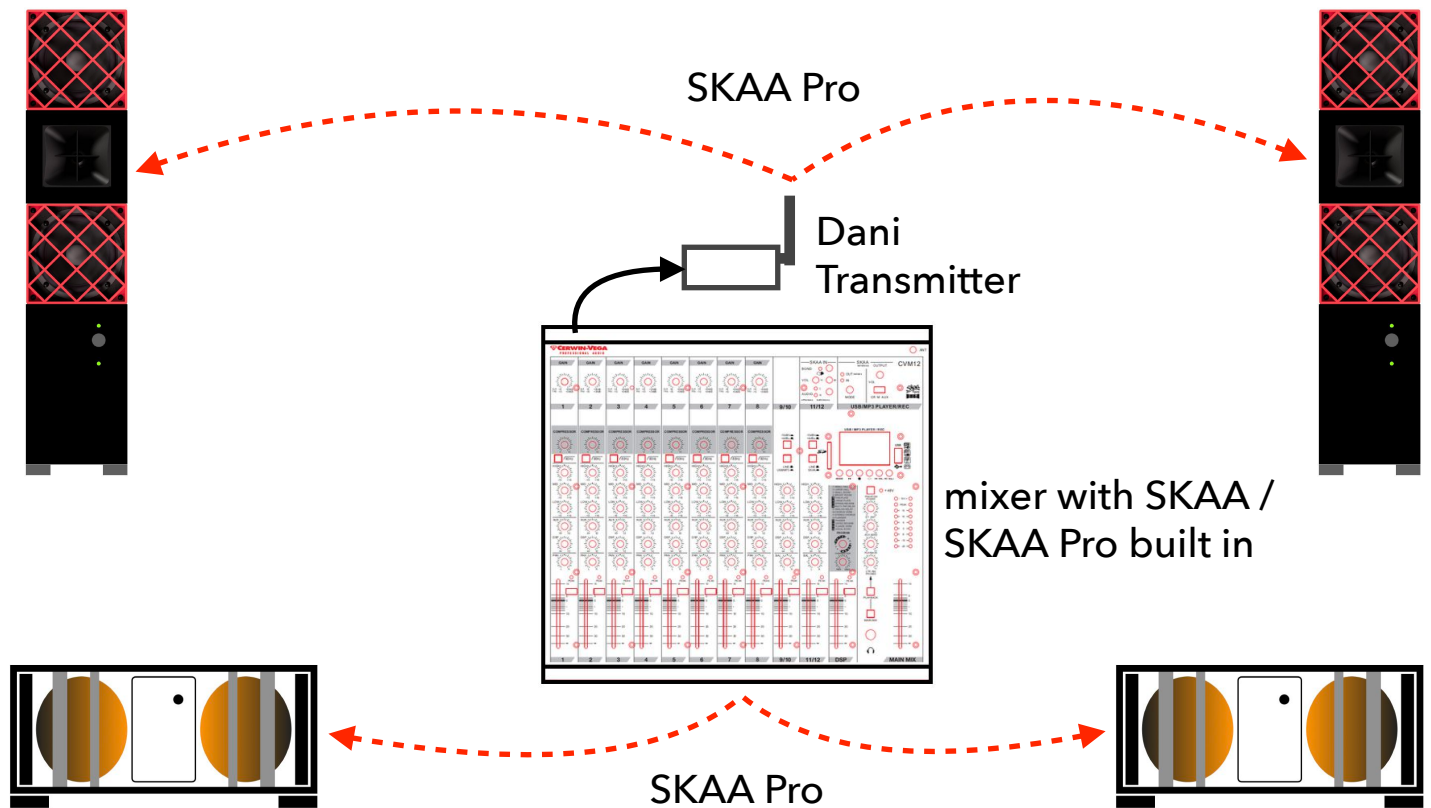the ultra low latency version

82

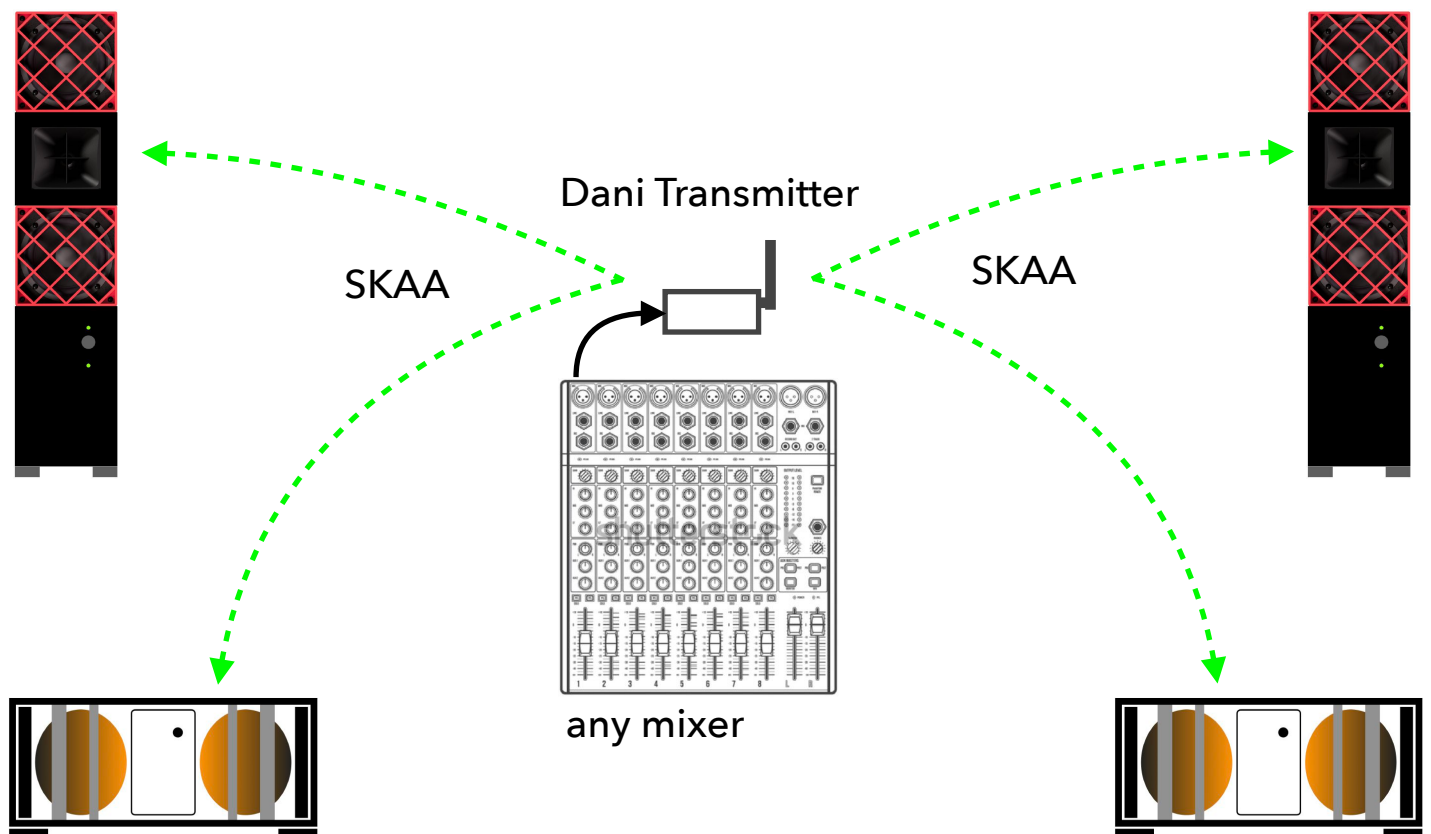convert any mixer to SKAA with Dani

83

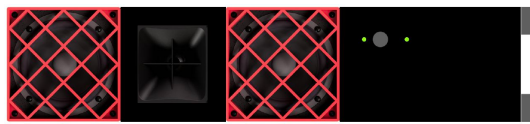
run 2 mono separate monitor mixes on stage

DFA as a
powered floor
monitor (Aux 1)




DFA as a
powered floor
monitor (Aux 2)

mixer with ≥ 2 aux busses



Dani fed from Aux 1
and Aux 2 monitor outs

84

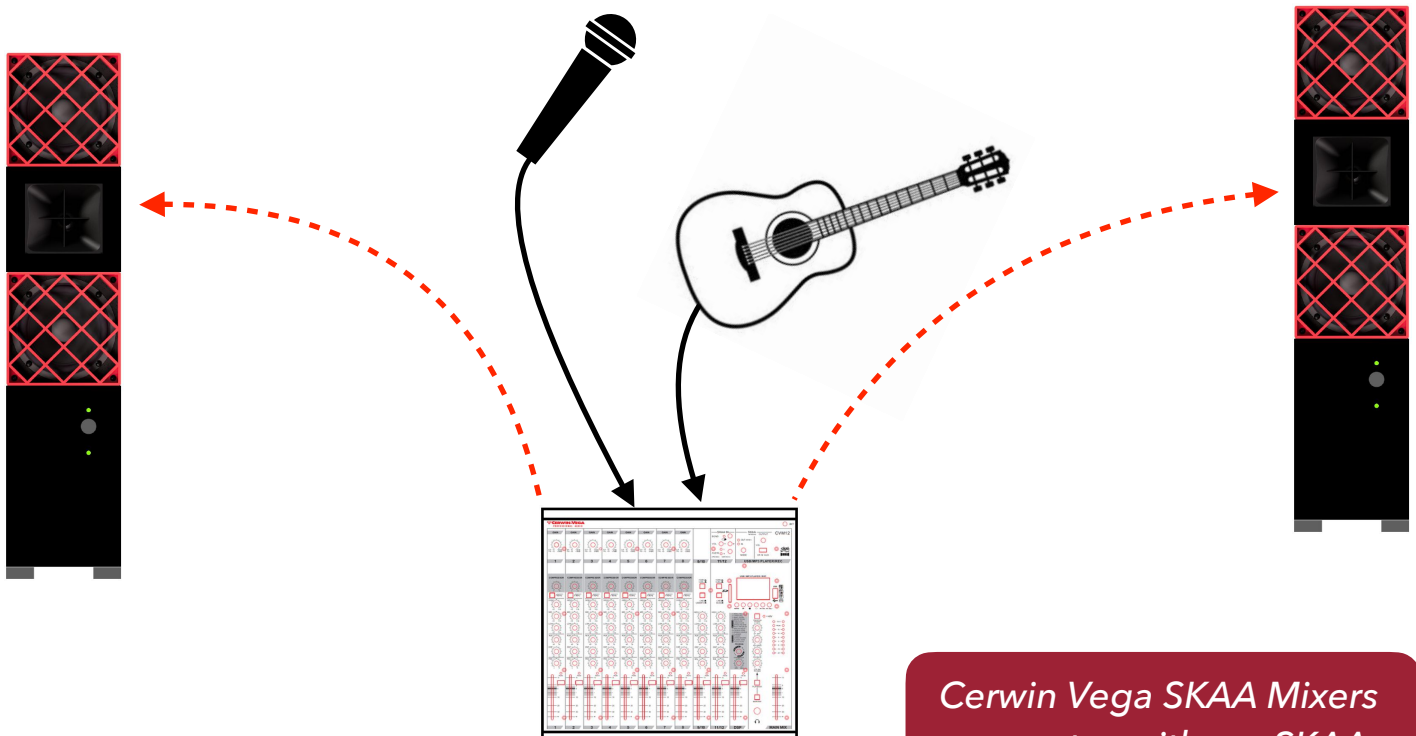
easiest setup and teardown ever

Cerwin Vega
SKAA Mixer

*Cerwin Vega SKAA Mixers
can act as either a SKAA
Transmitter or Receiver*


85

record your front of house audio

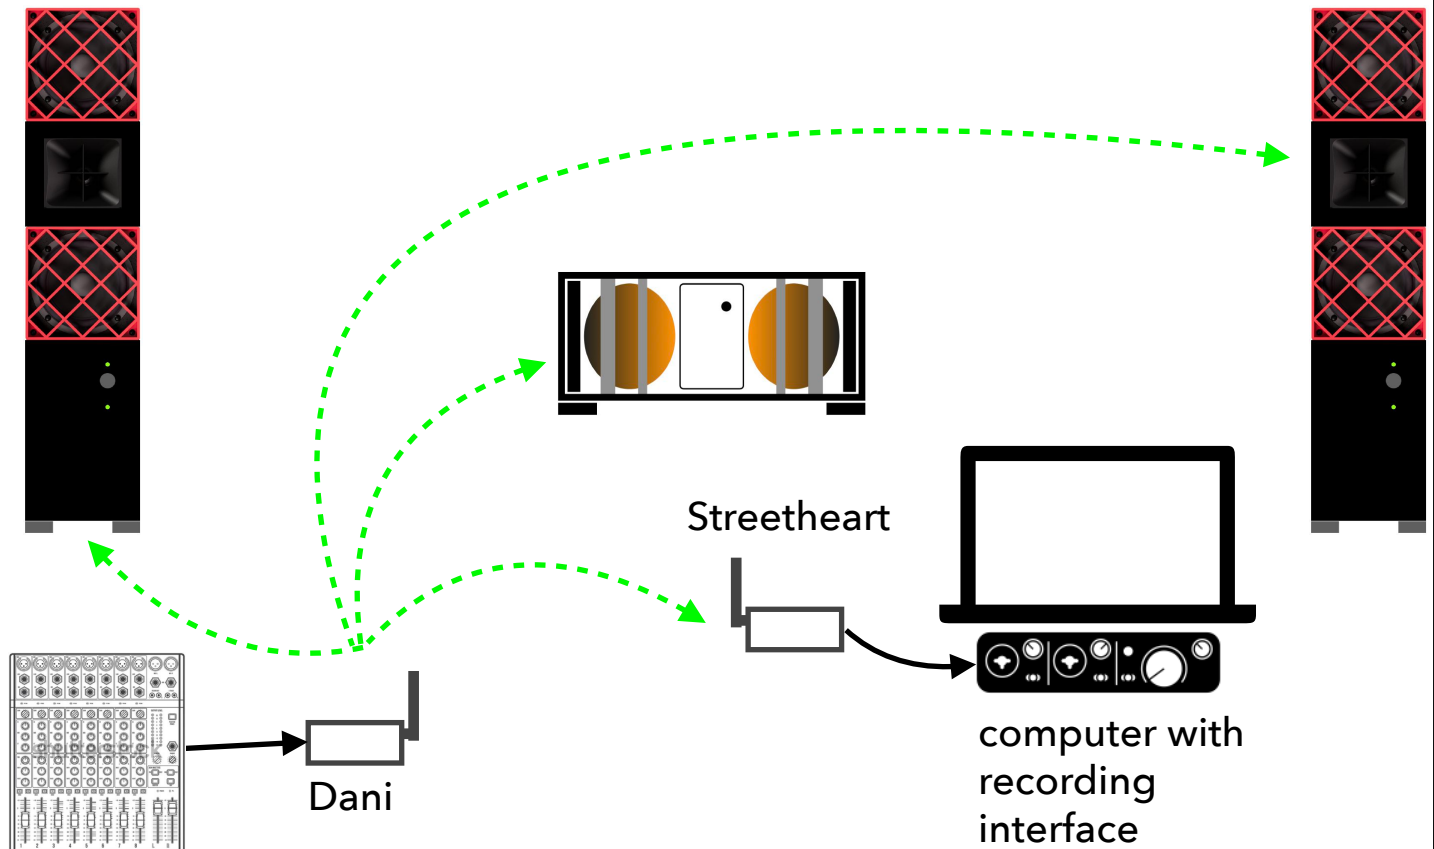


86

the Grateful Dead called...

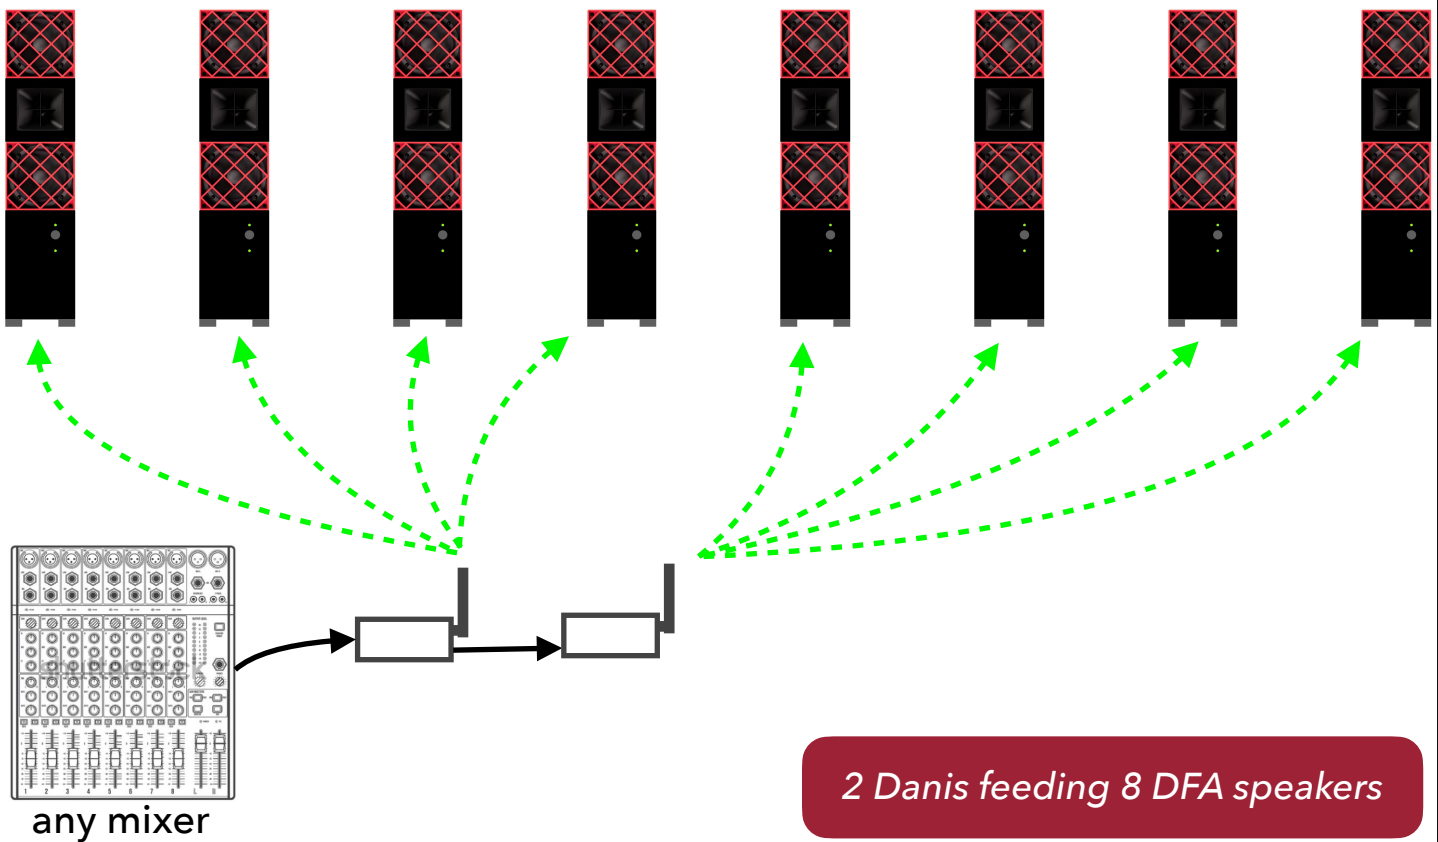


87

basic PA

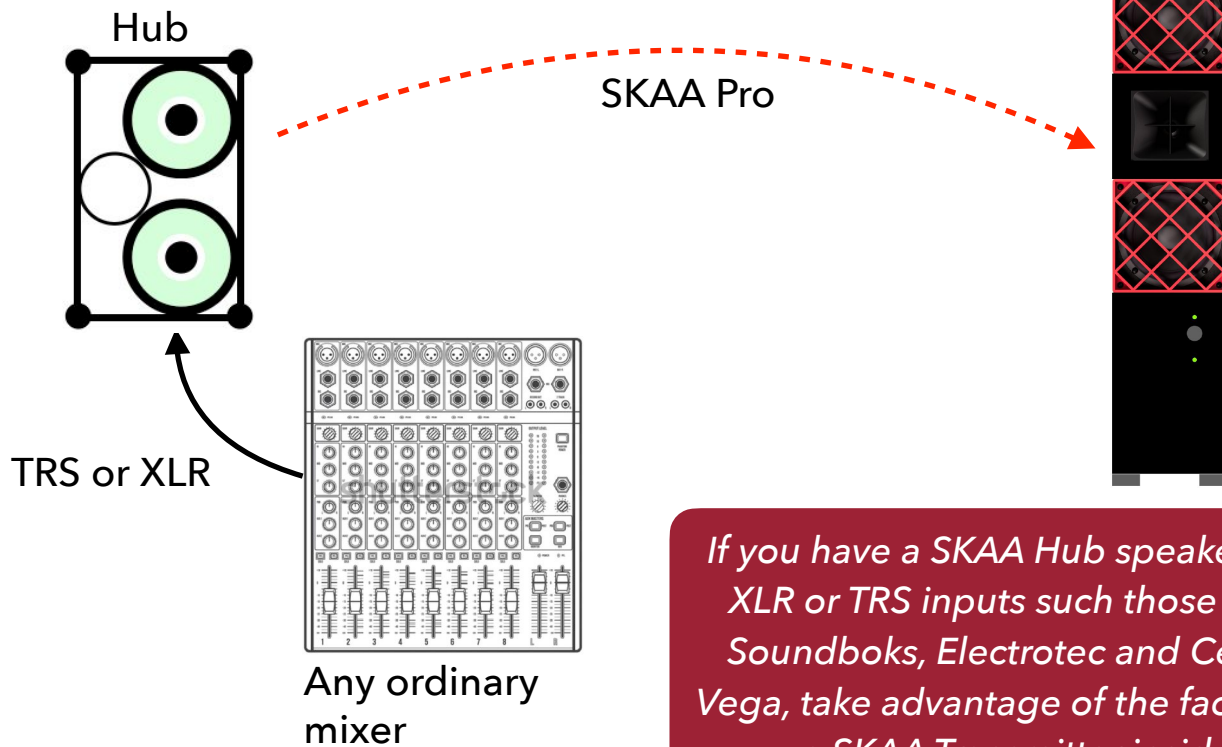


88

... add a sub

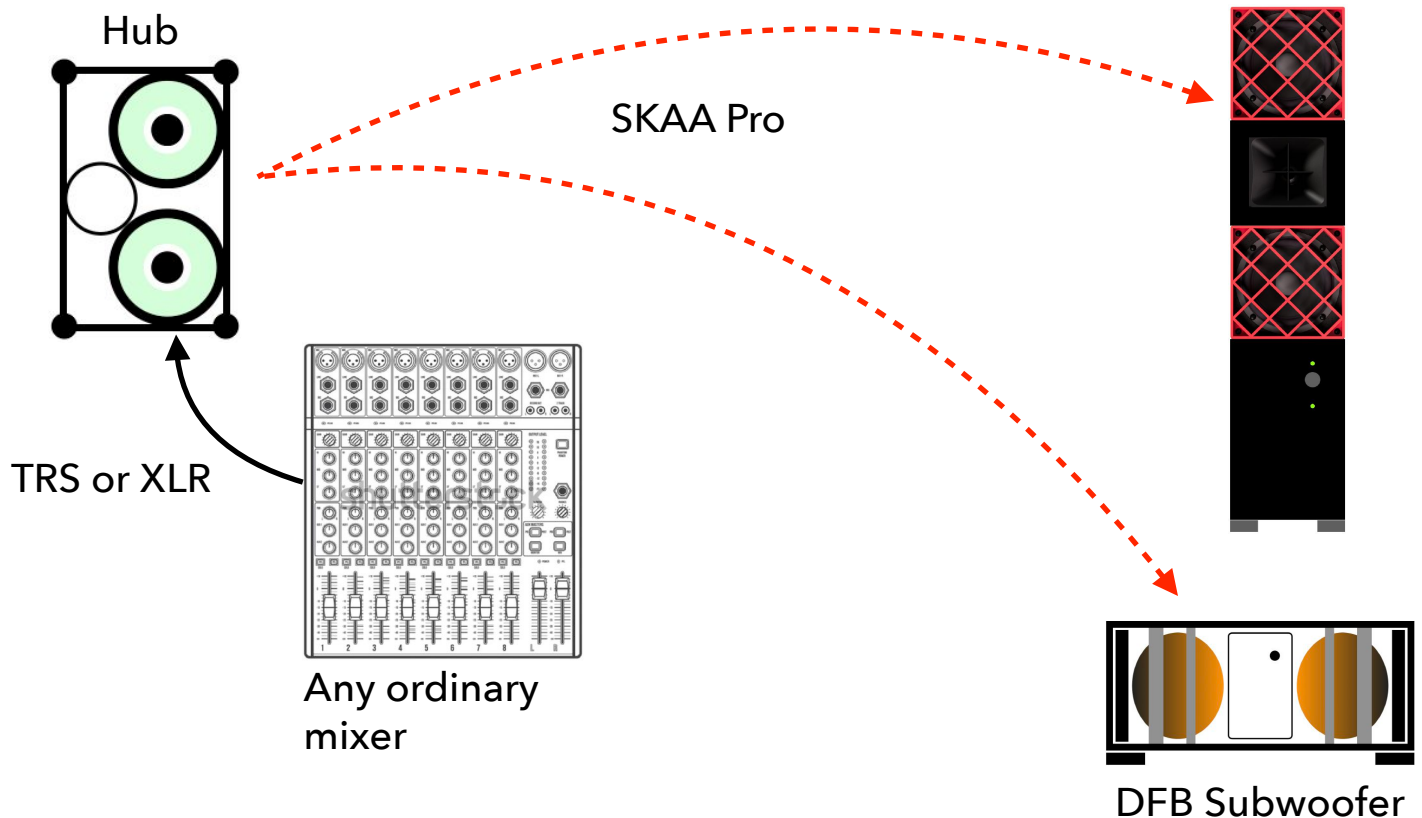


89

... 4 speaker PA with headphones

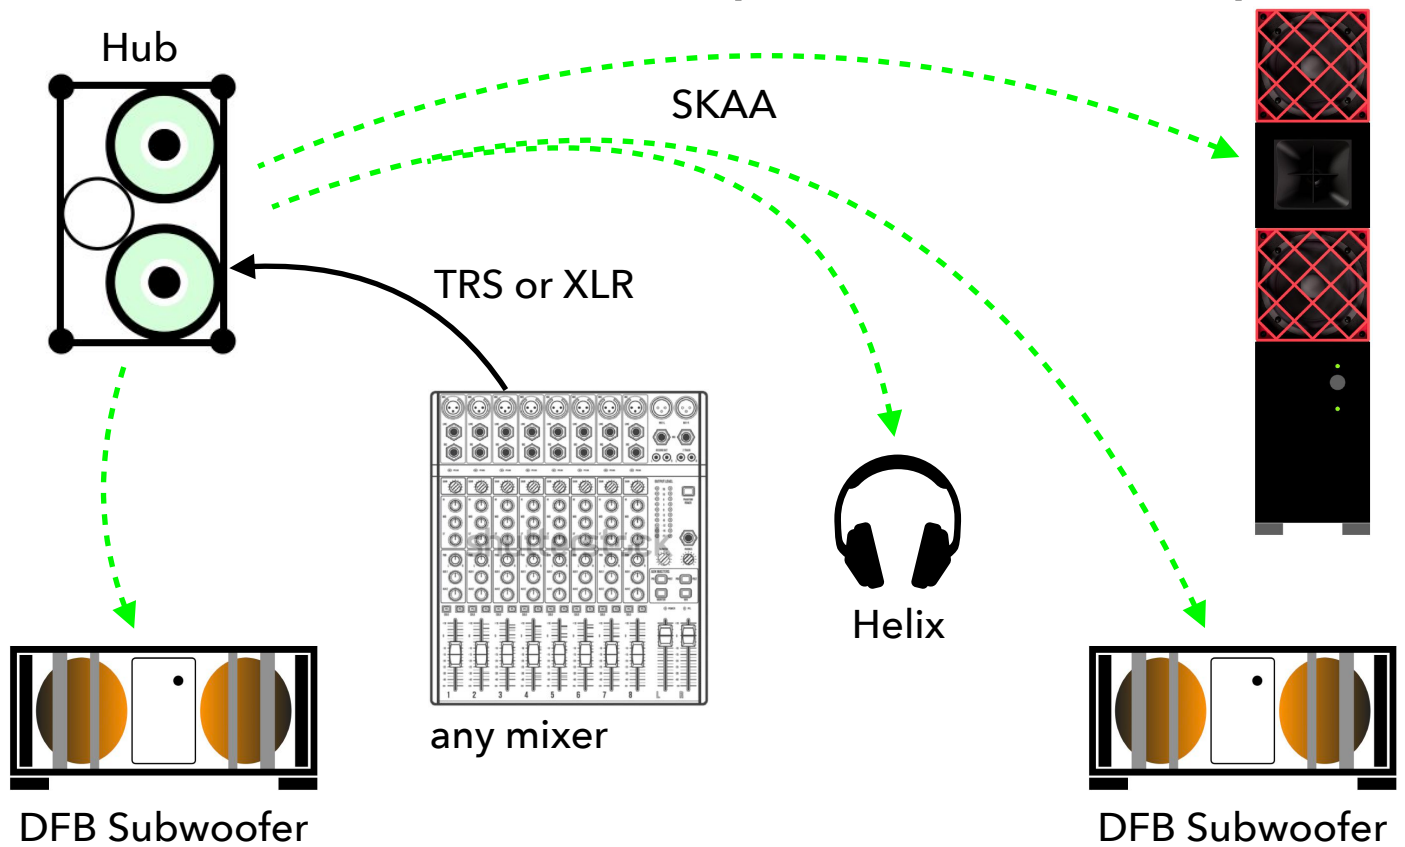


90

... or do 5 speakers for better coverage

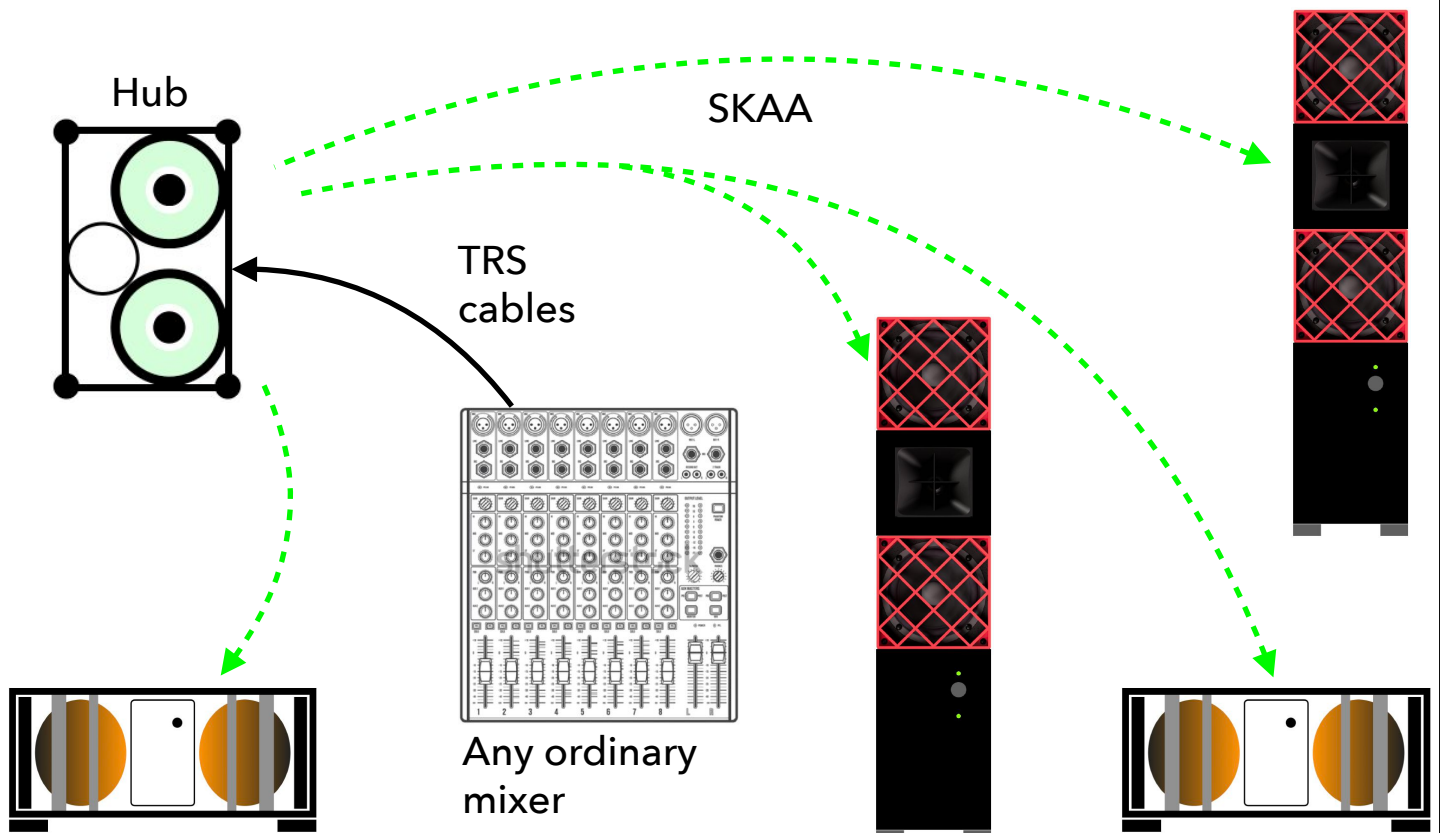


91



sync wired & wireless

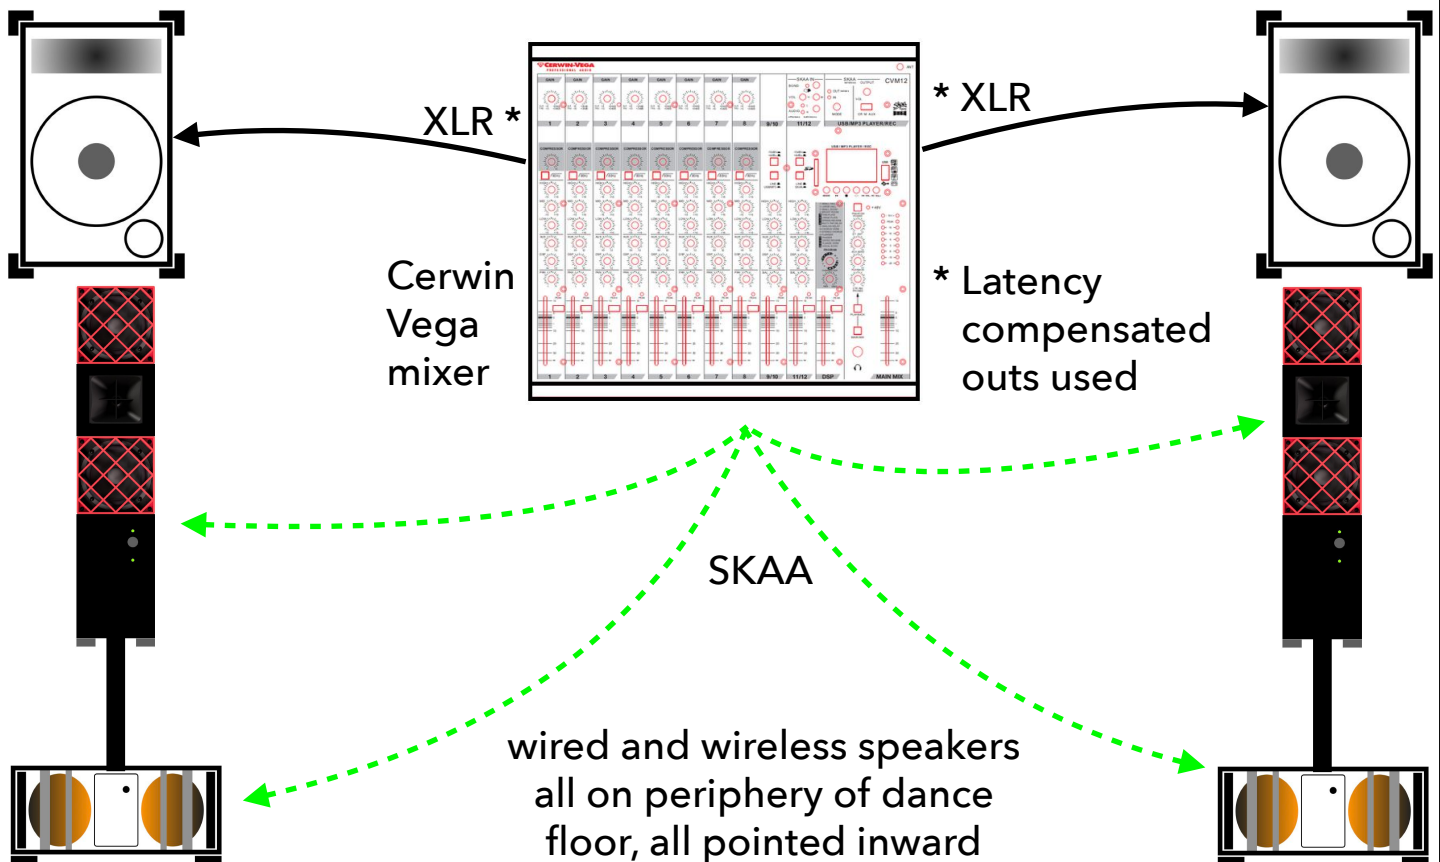

92

sync'd delay towers

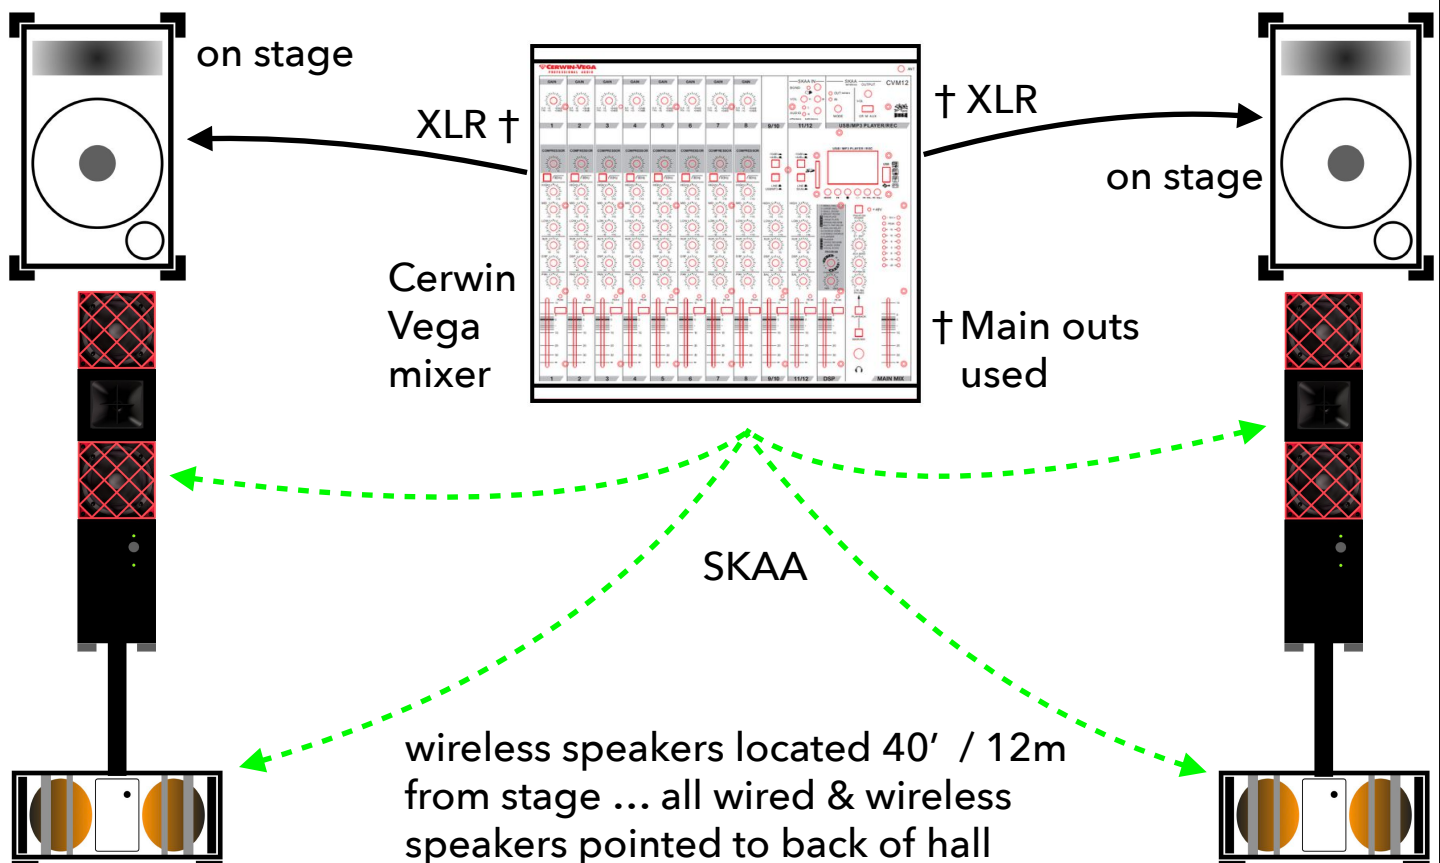


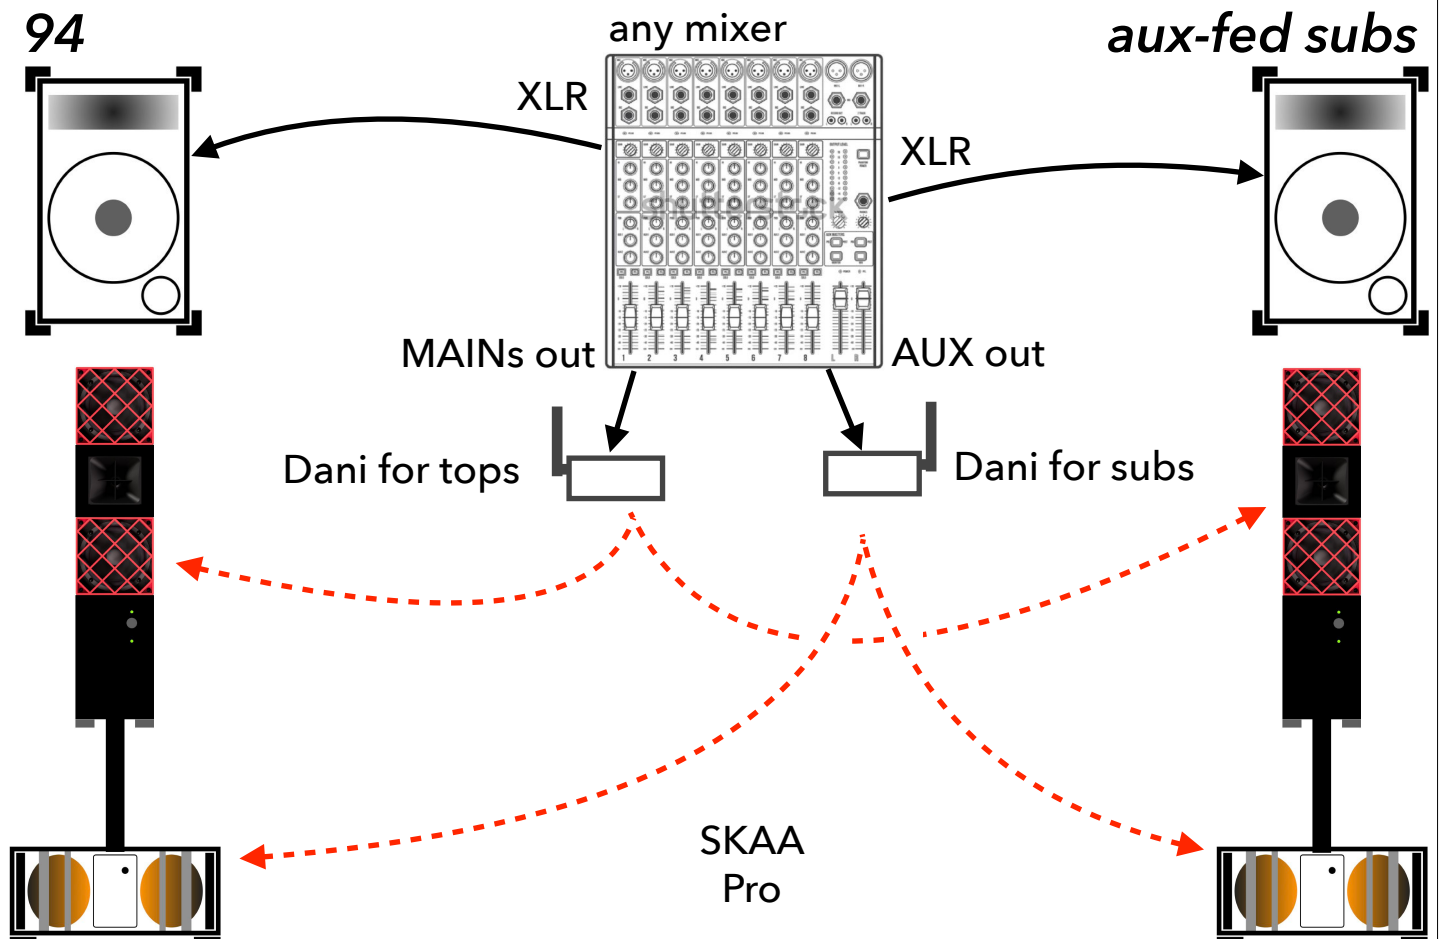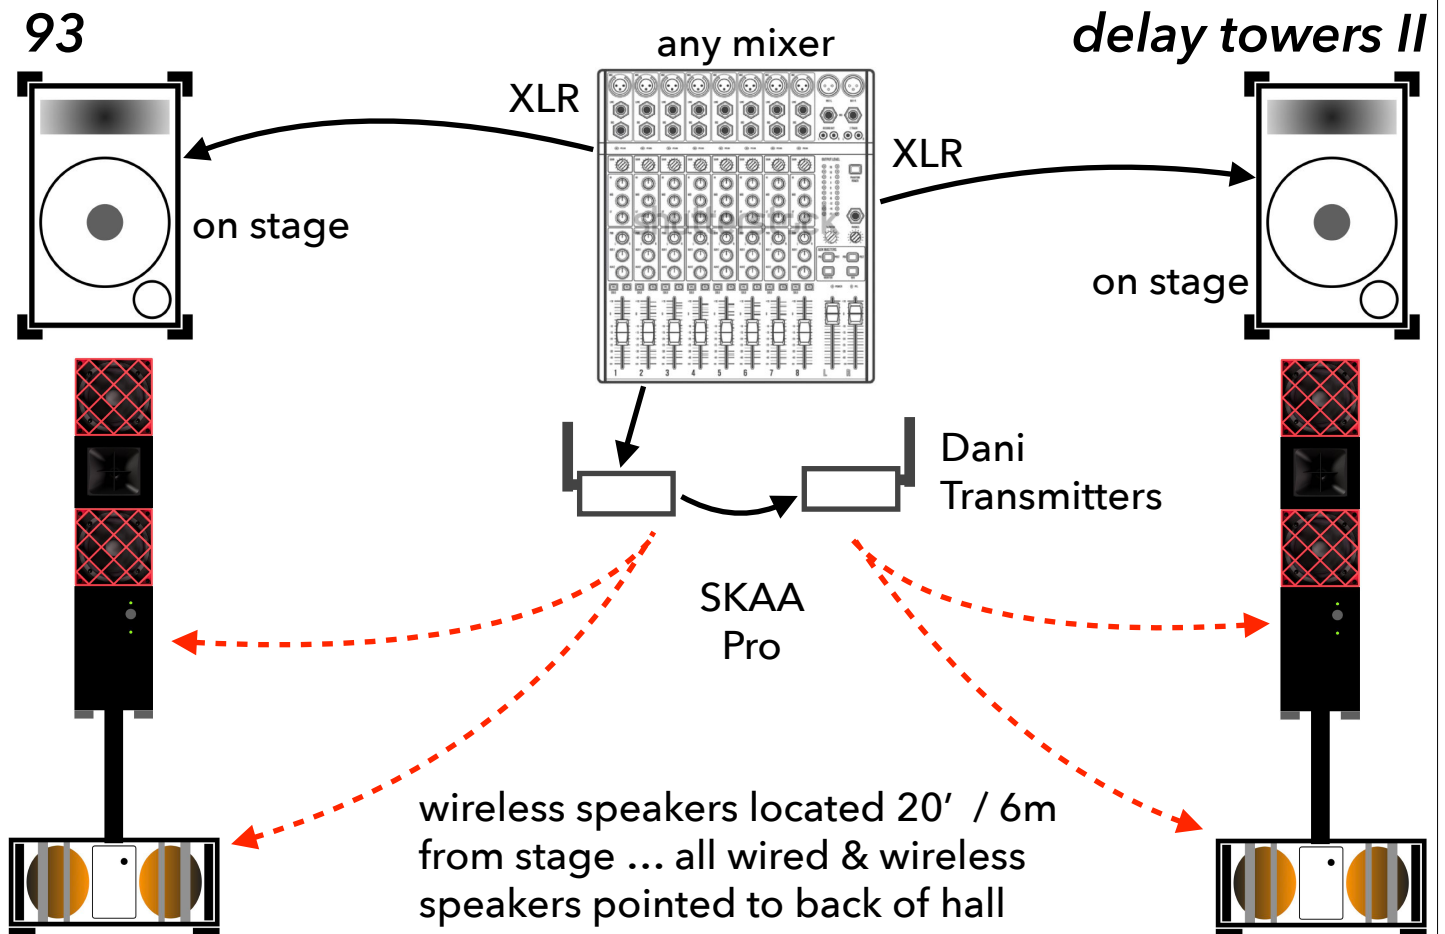

Movies, TV, Social Media & Games


95

tried and true party

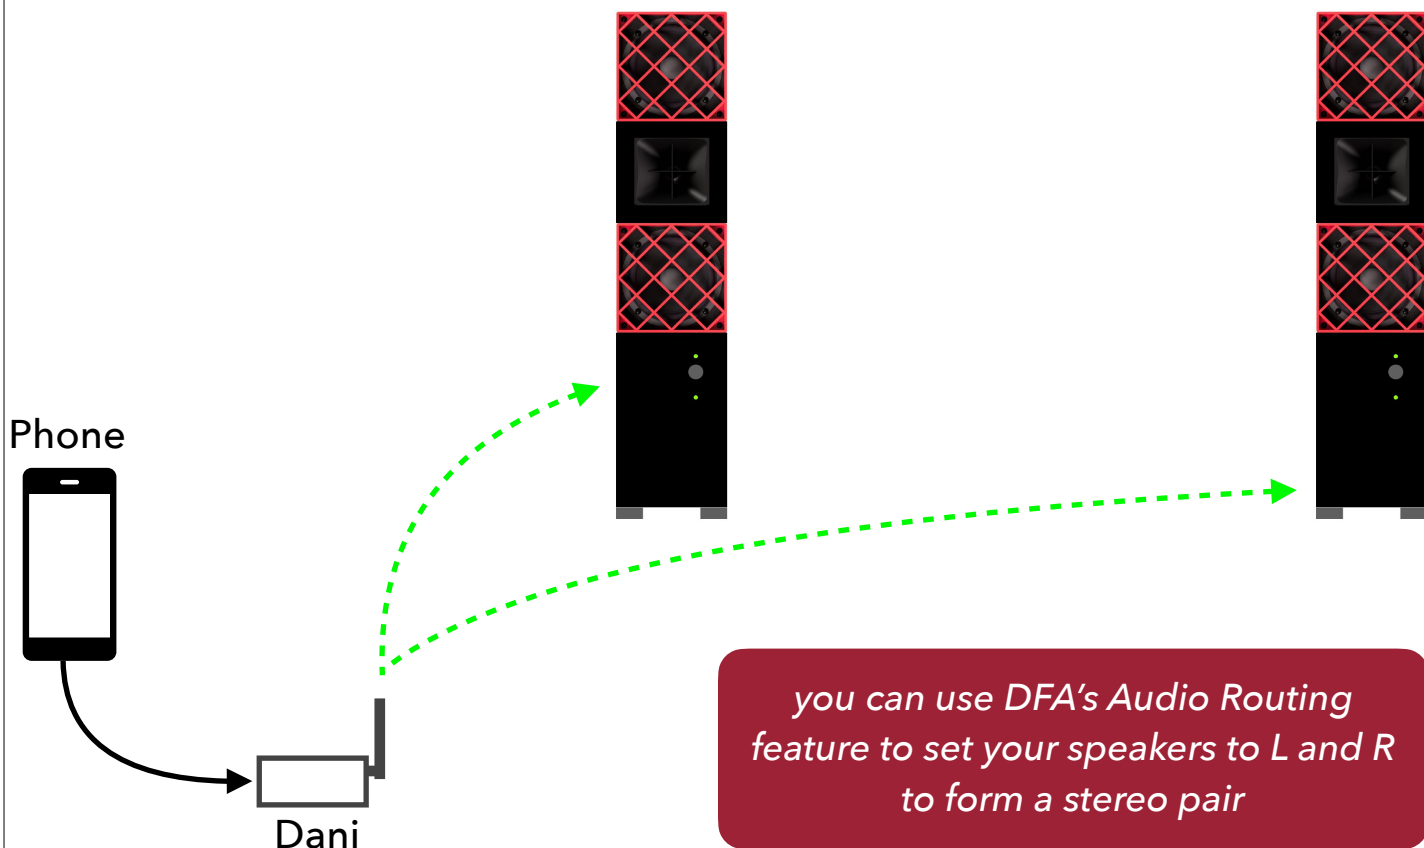

96


double or nothing

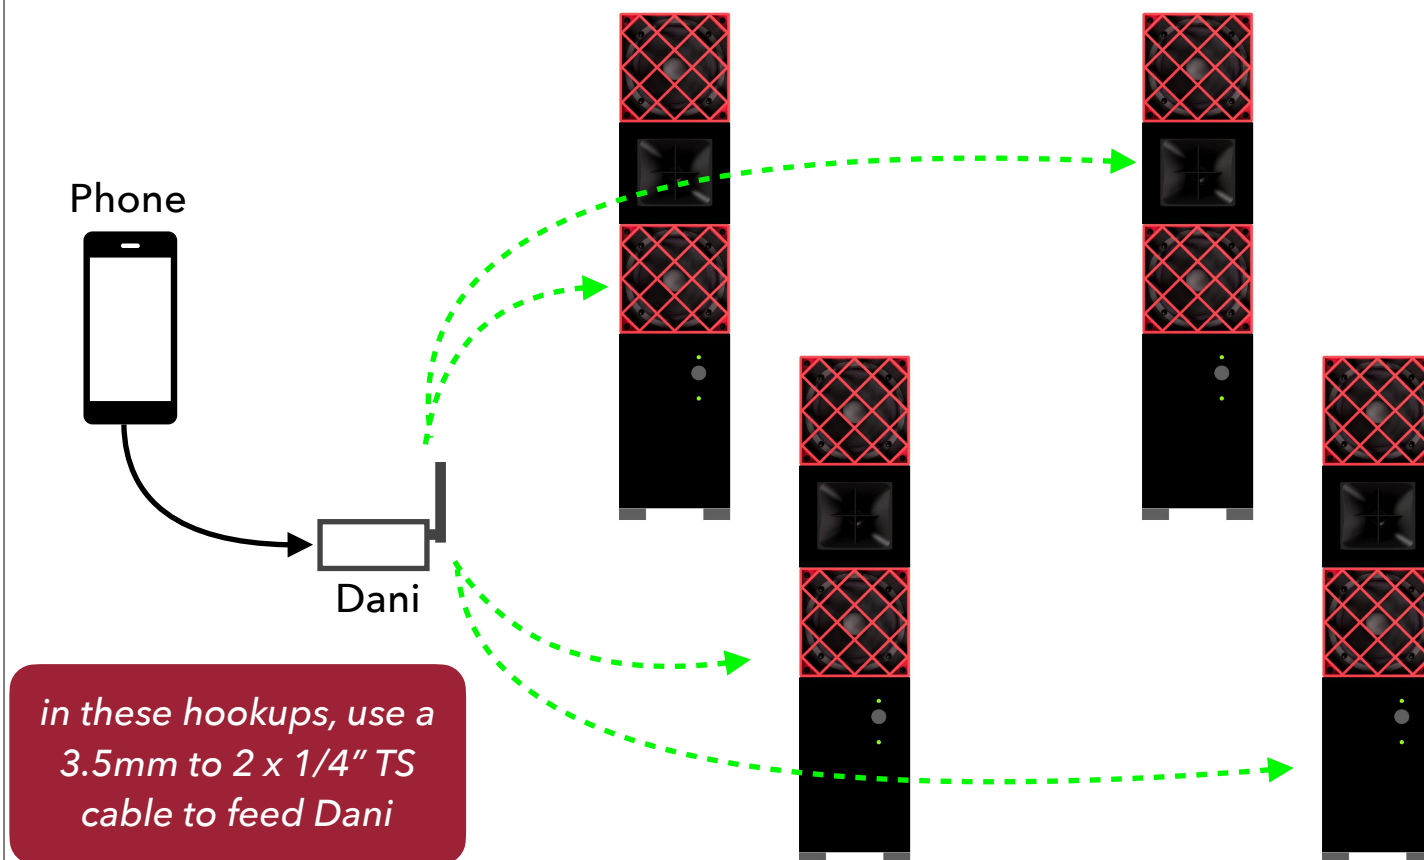




97

mo bass goo


Phone



Dani




Death From Below

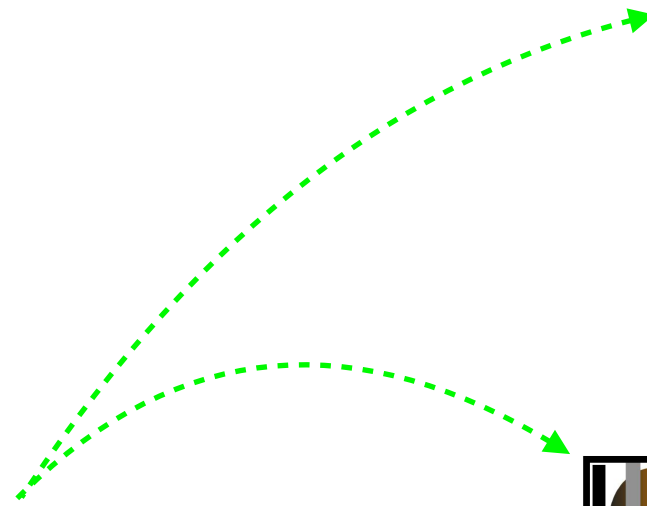

98

stereo subs because we can


Phone




Dani




L





R



L




R

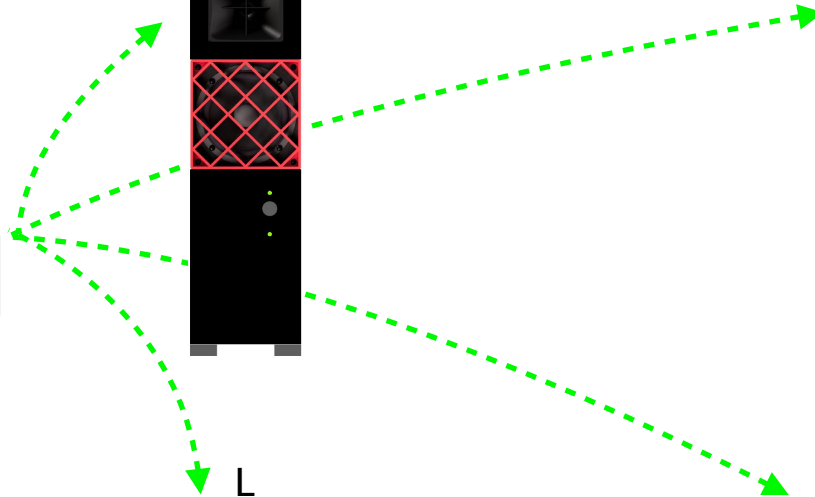


99

inside and on the patio

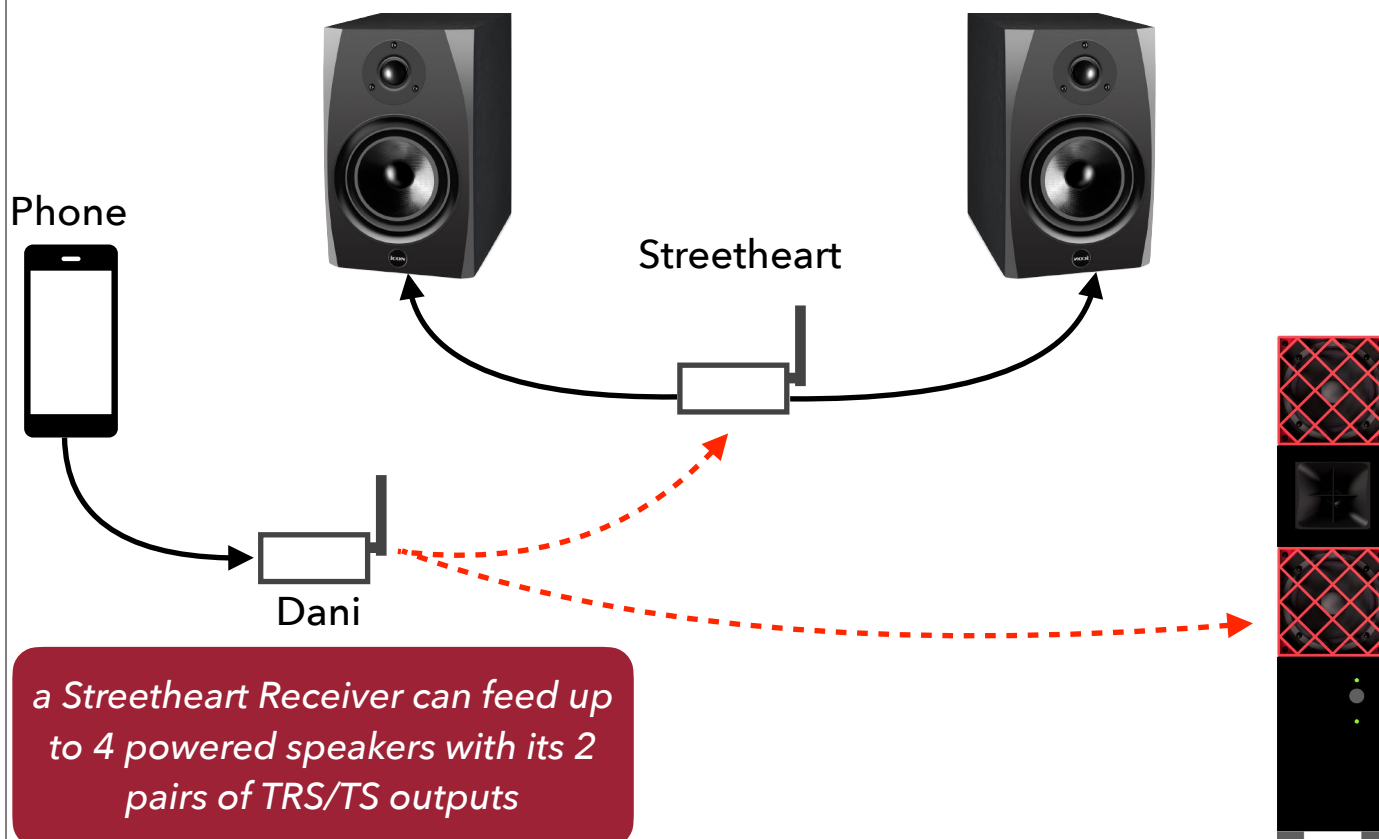


100

run speakers and headphones

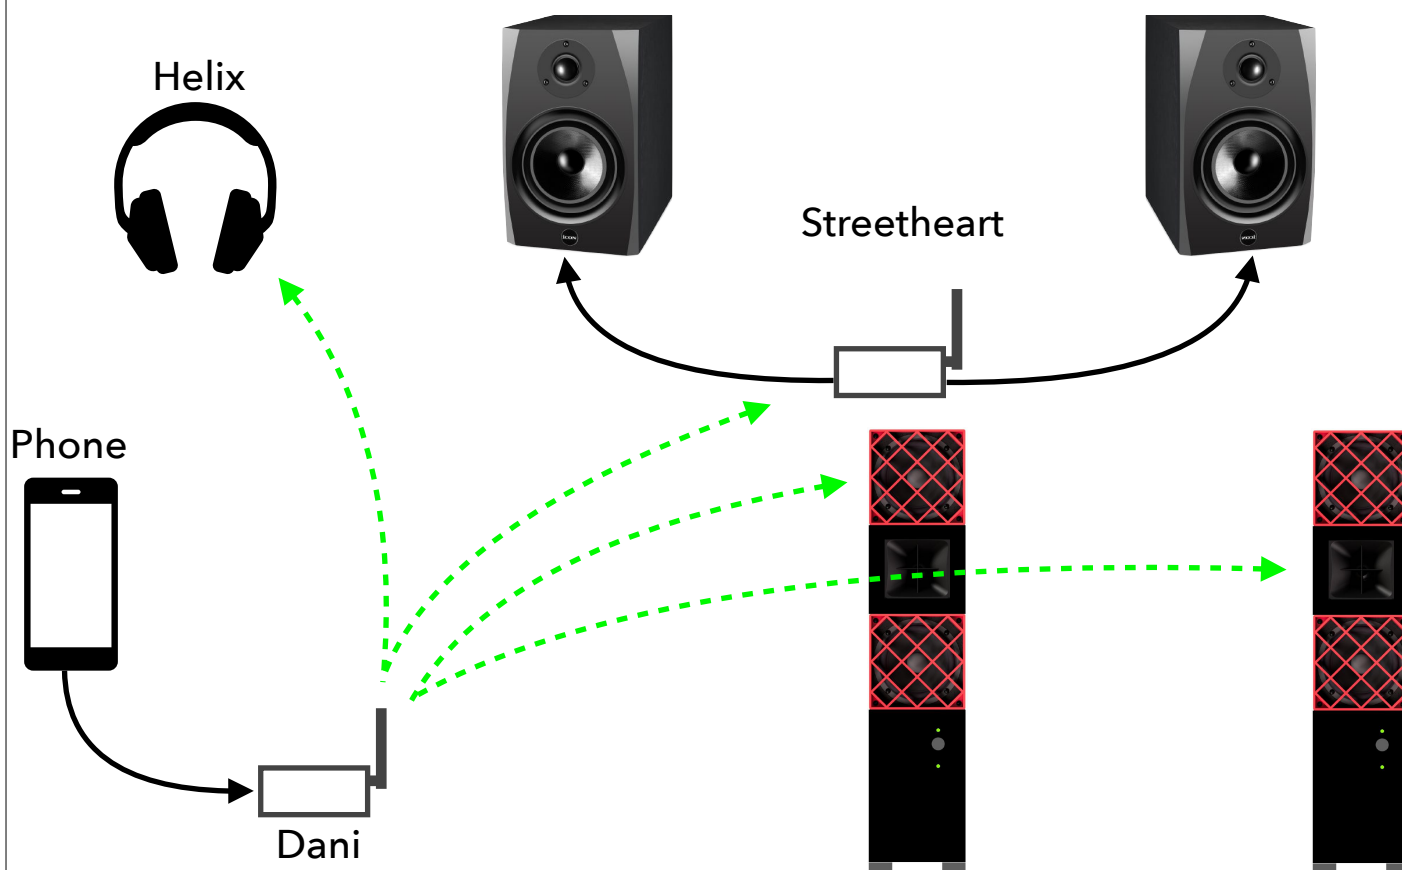


101

rock 4 different rooms at a party...

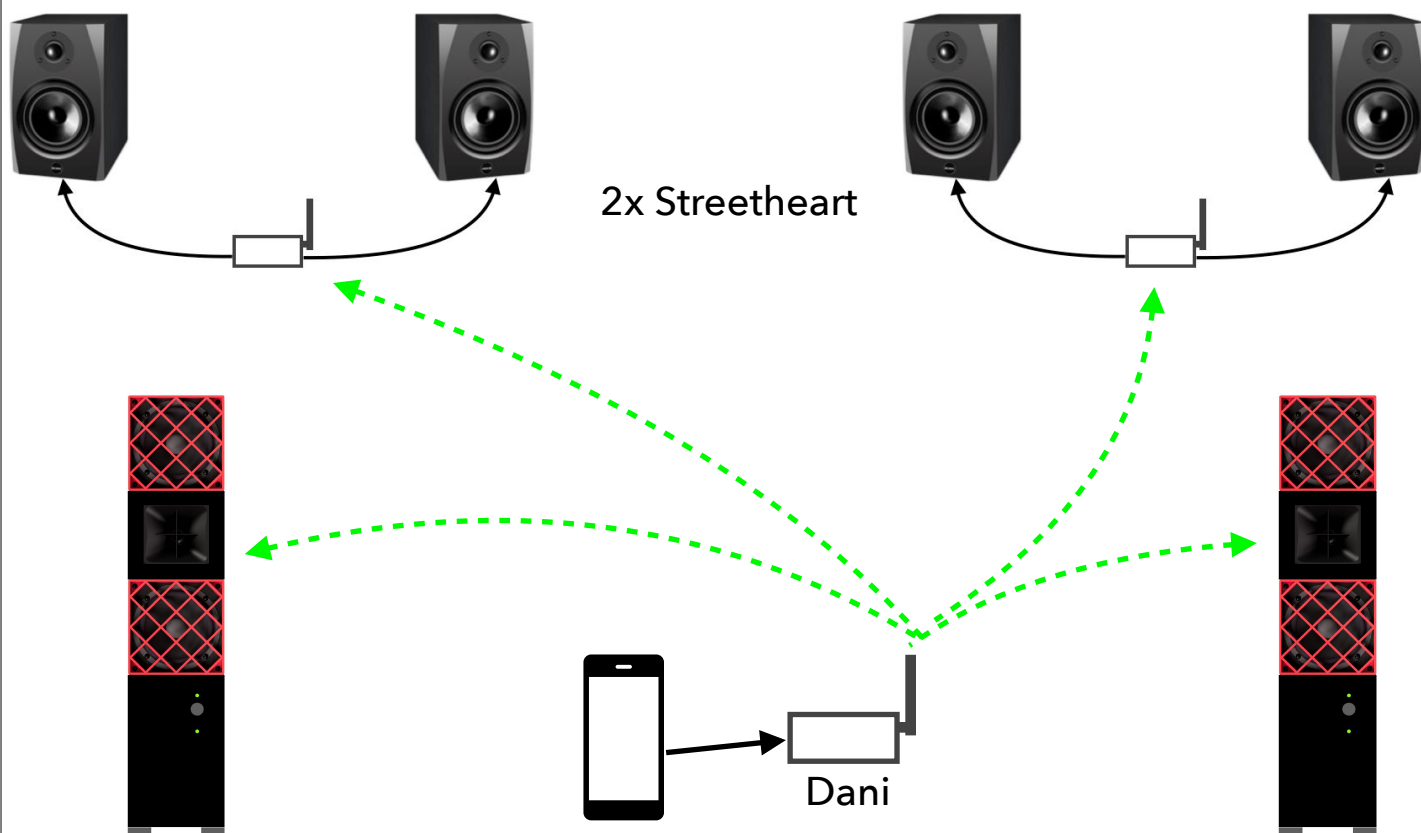


102

add subs for the harder-partying rooms

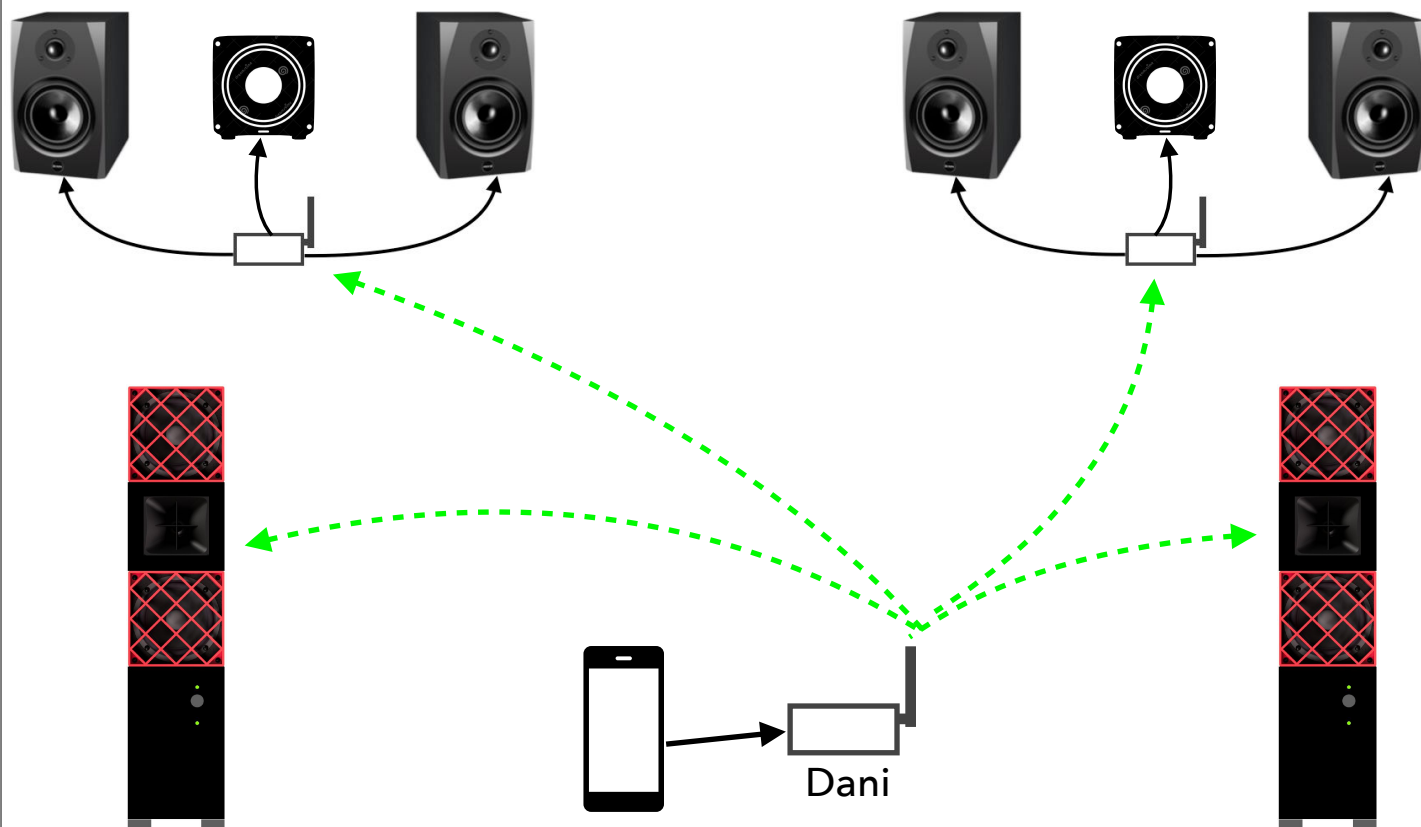


103

stereo vids, social media, games

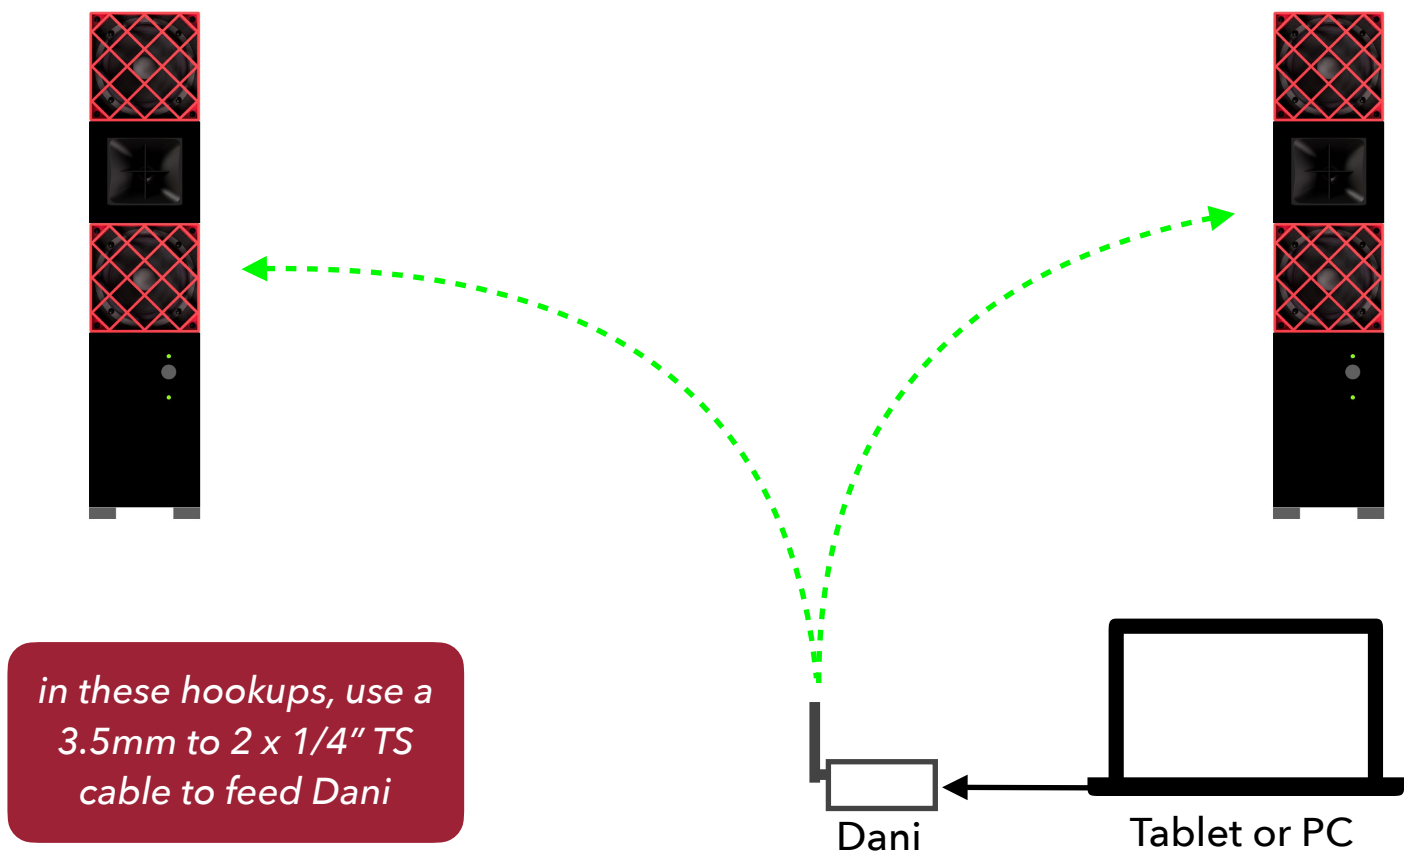




104

pump up the bass

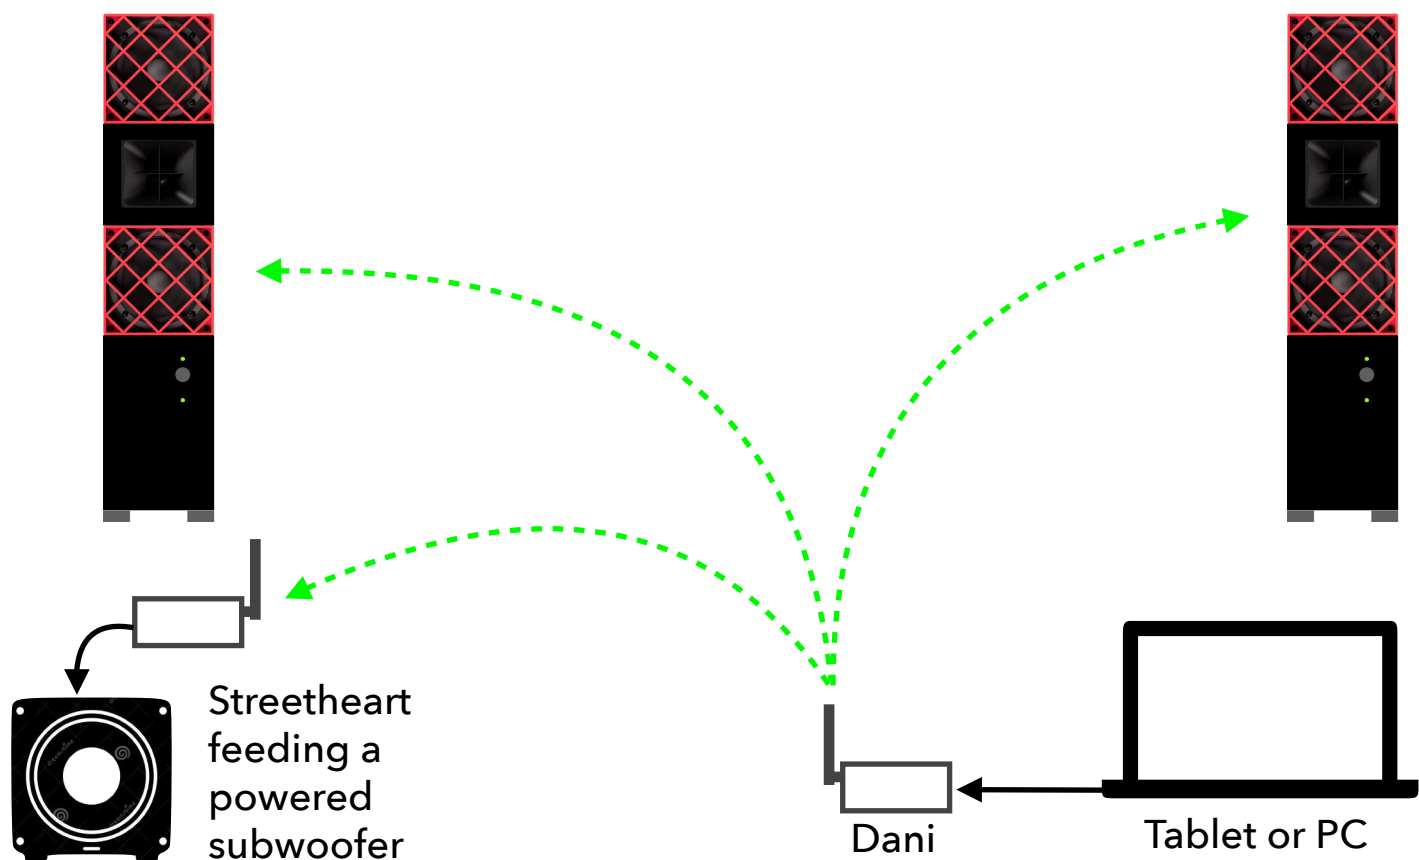


105

watch vids, play games





Dani

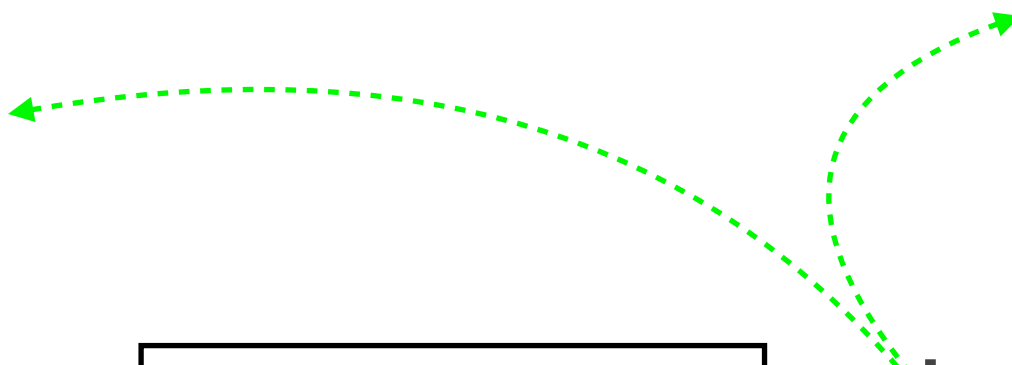

106



deluxe vids, games



Streetheart




Dani

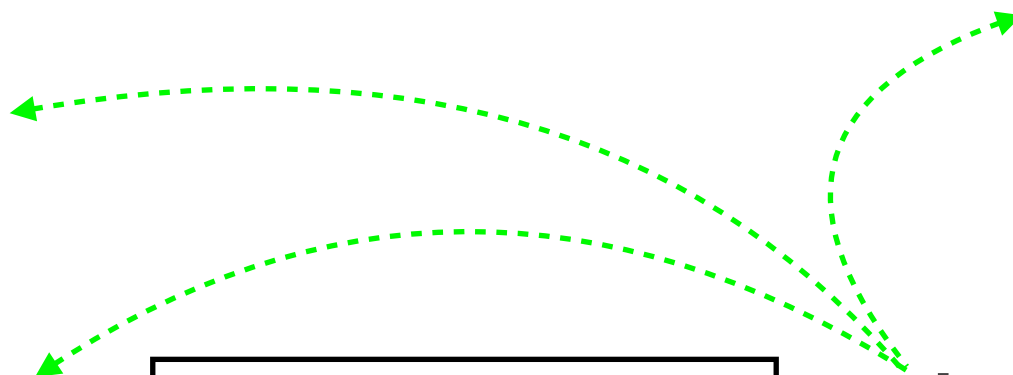


107

game on

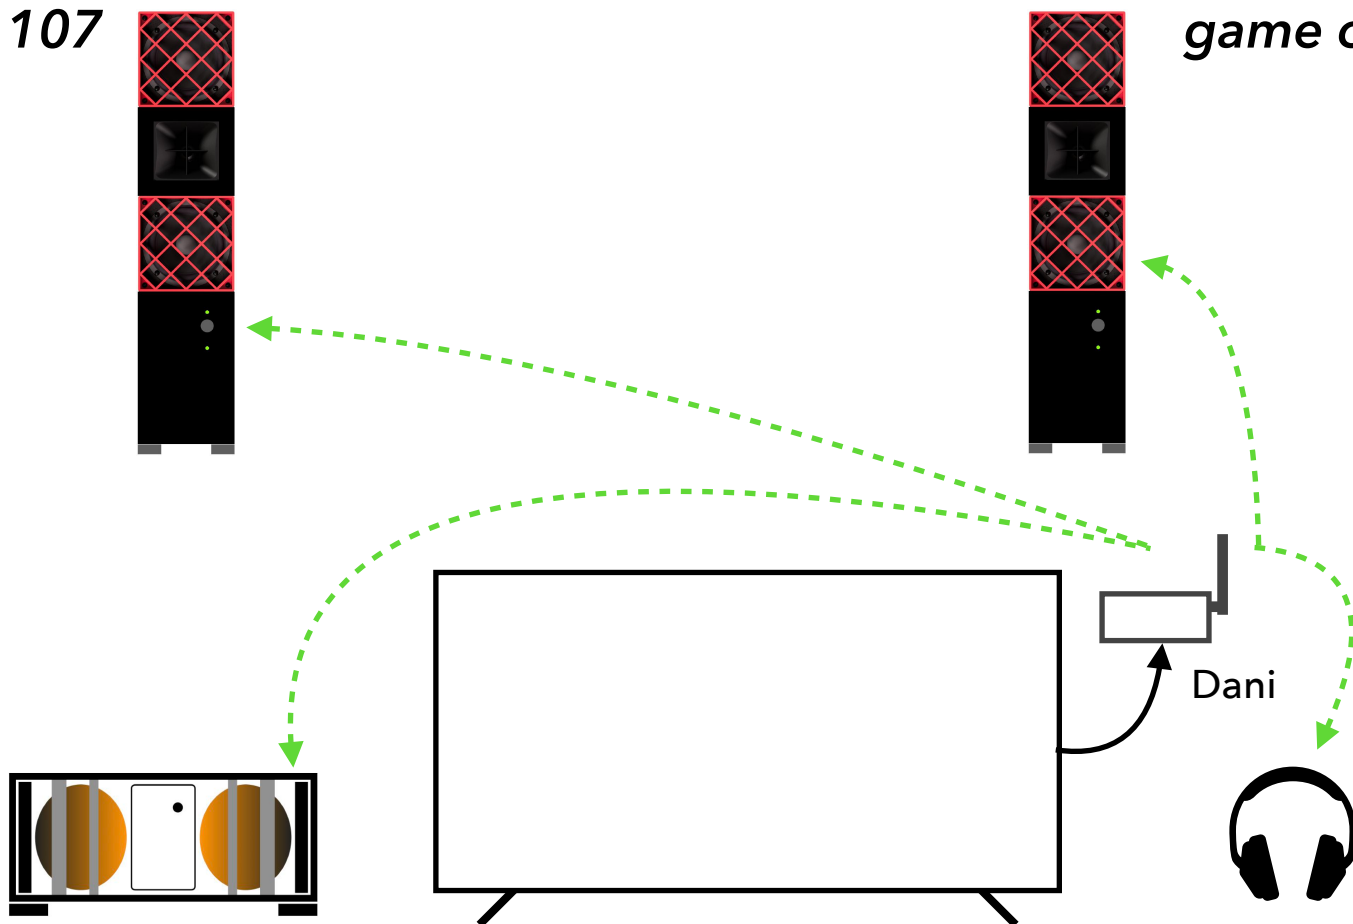


108

game on II

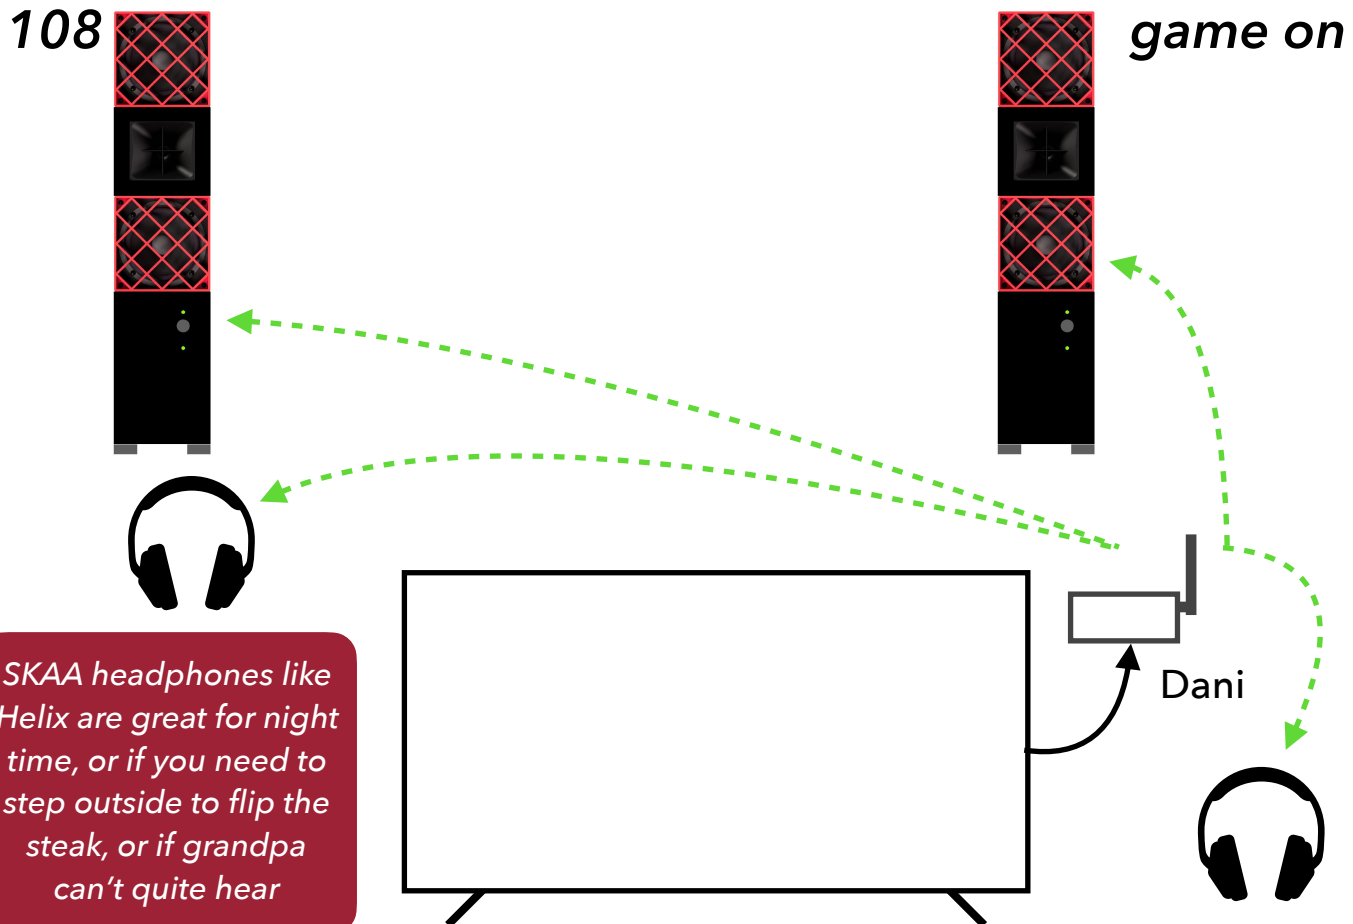


SKAA headphones like Helix are great for night time, or if you need to step outside to flip the steak, or if grandpa can't quite hear

109 *keepin' them Mackies busy when I'm not gigging*

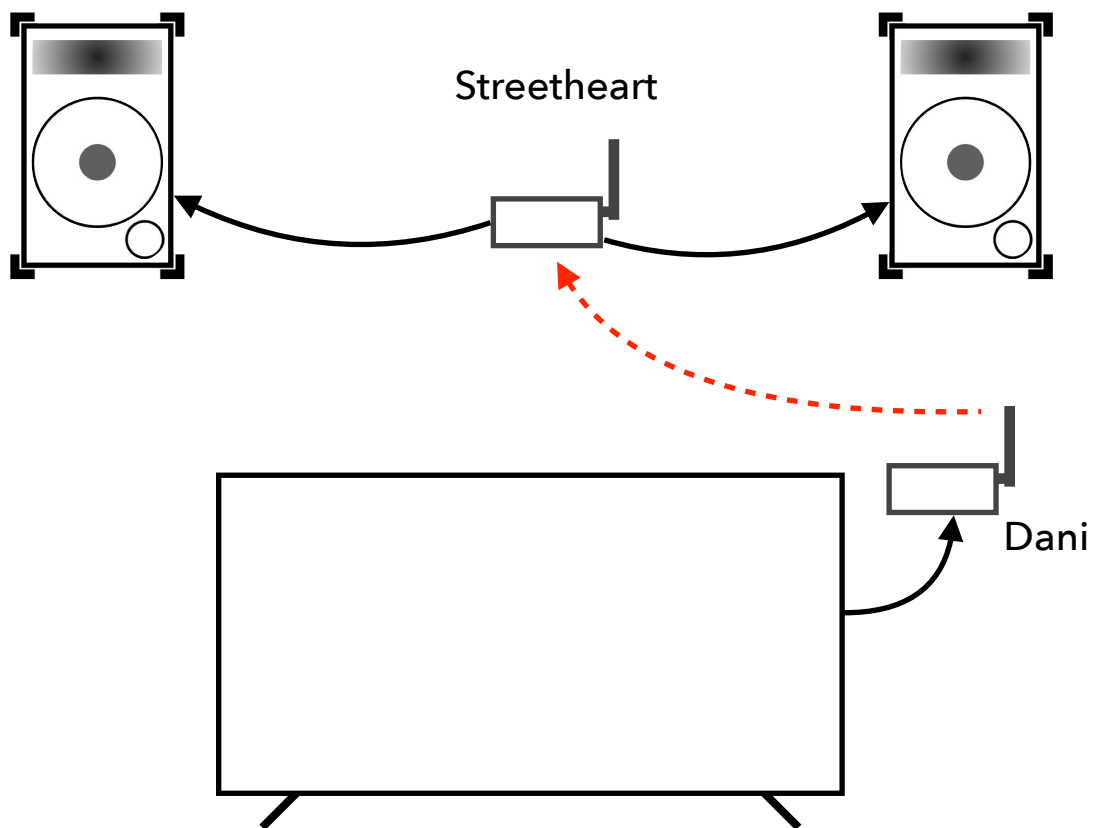


110 *... also, I hate my neighbours*

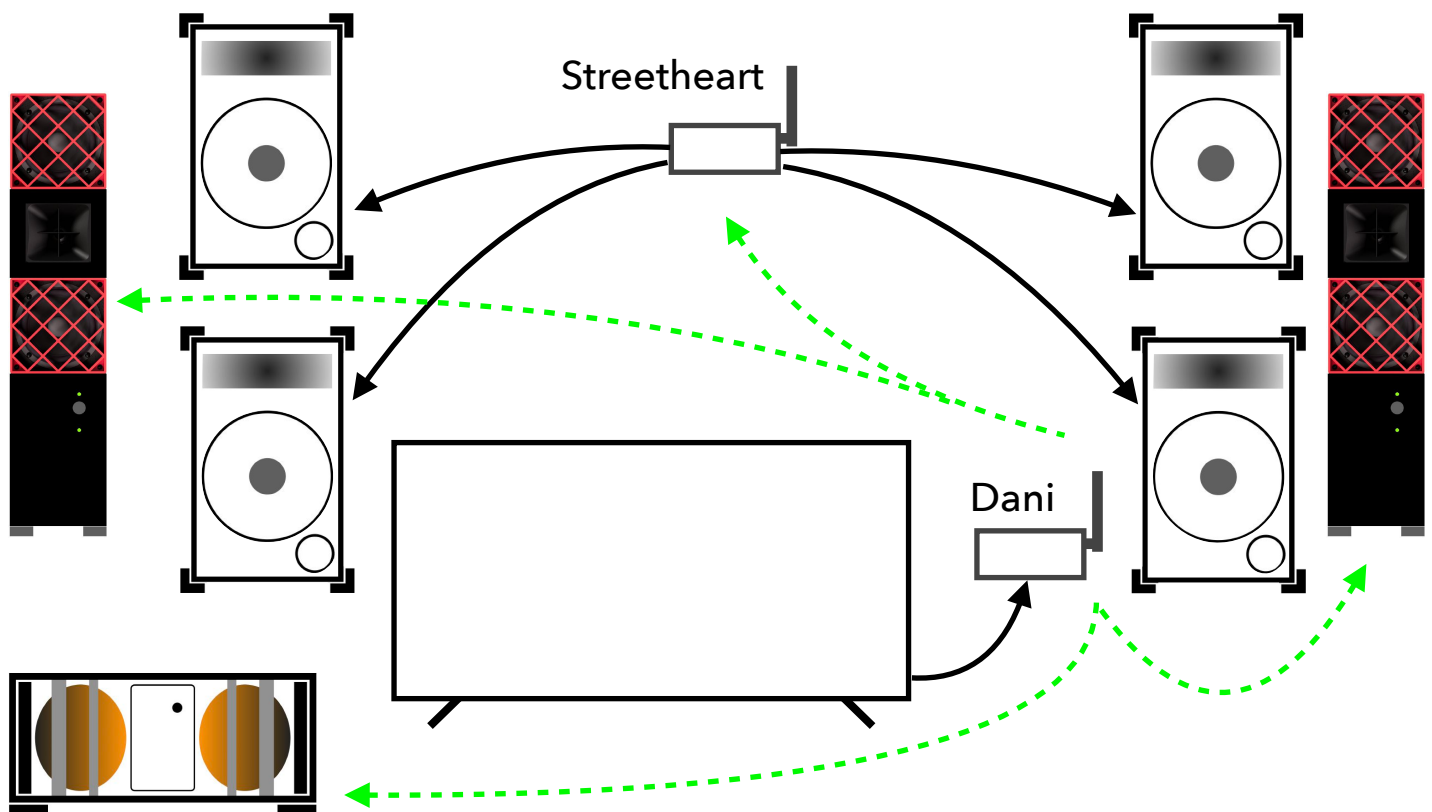


111

watch vids, social media, play games

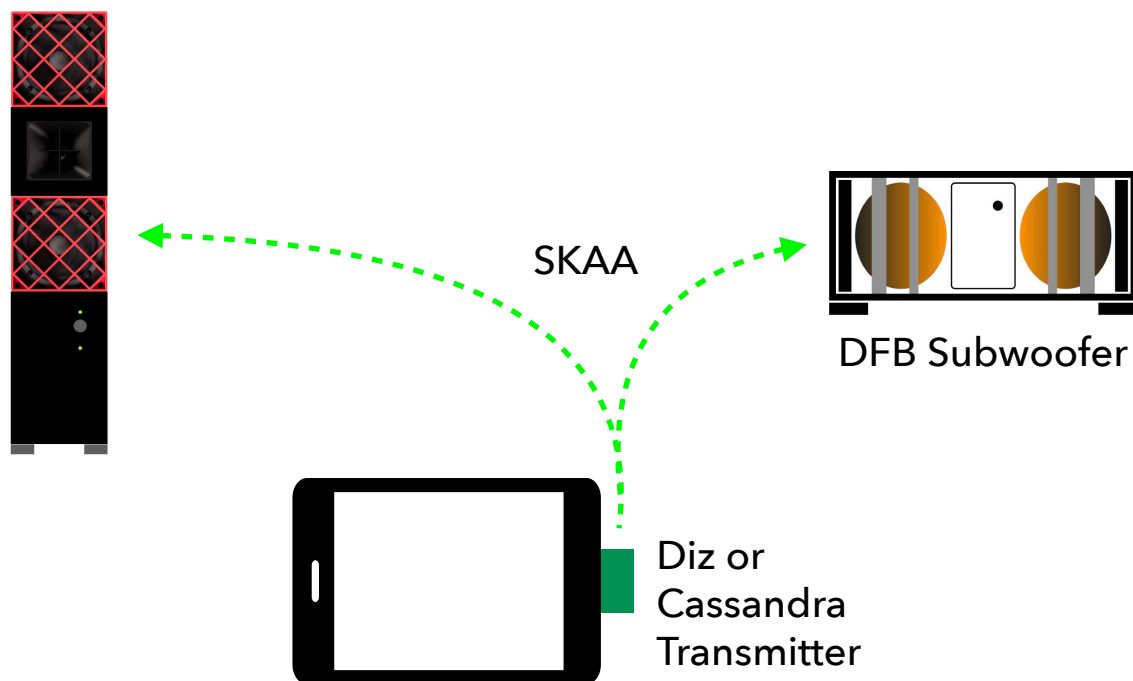


112

... let's play that game in stereo, shall we?

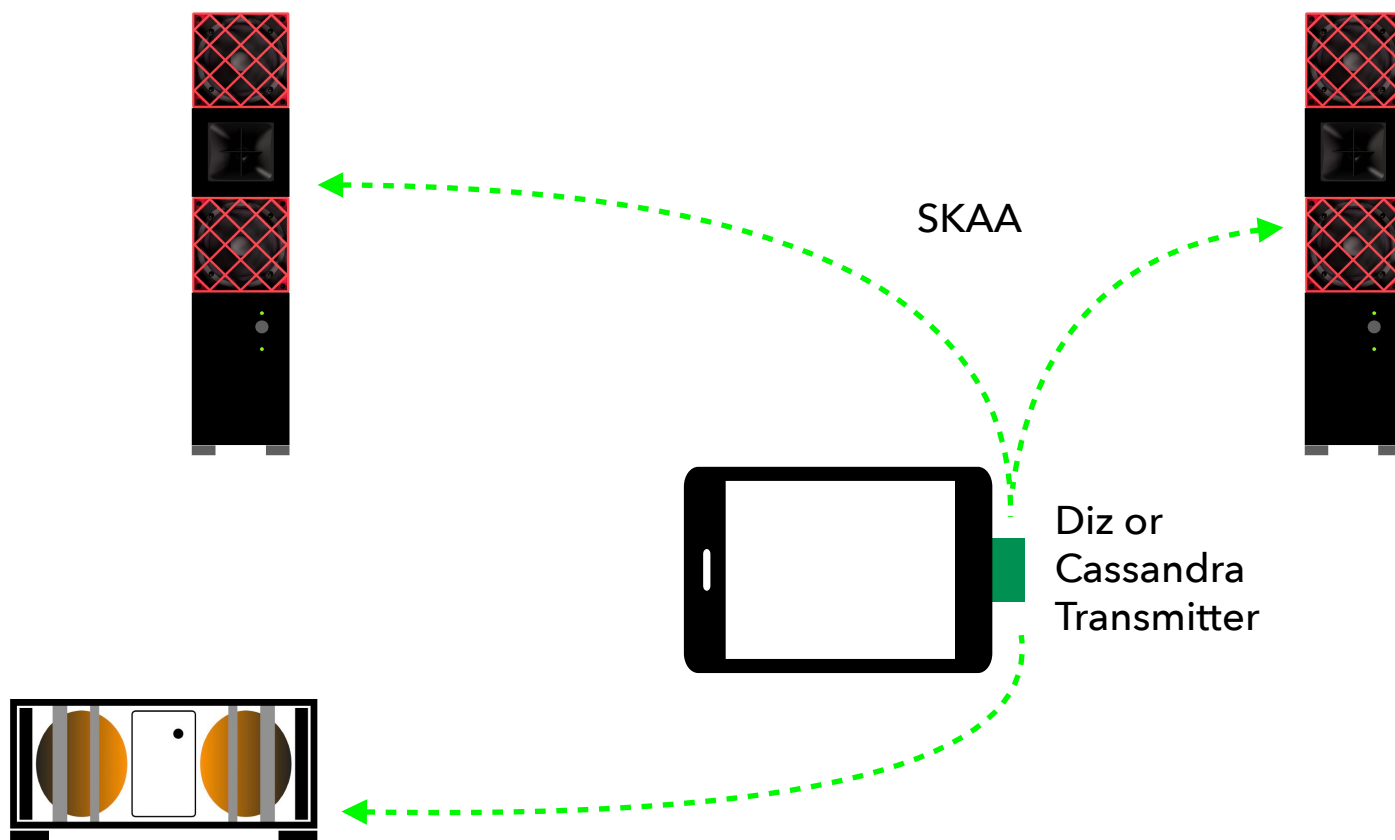


113

watch vids, play games on TV

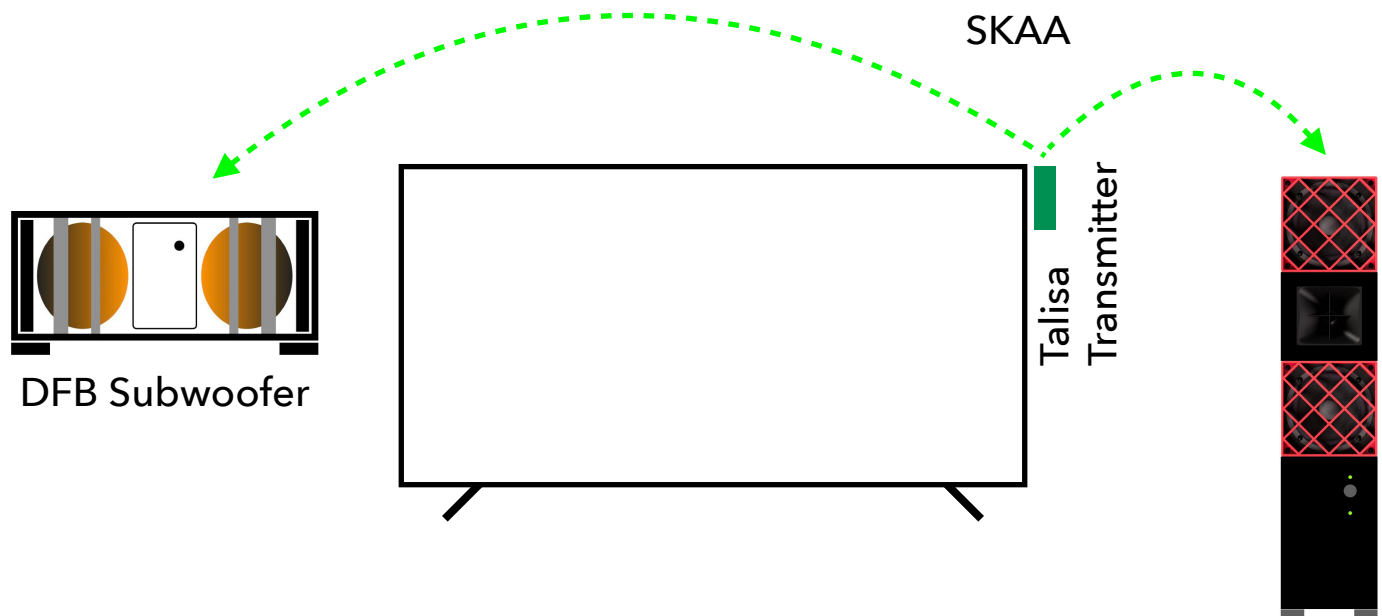


114

... stereo TV with mondo bass

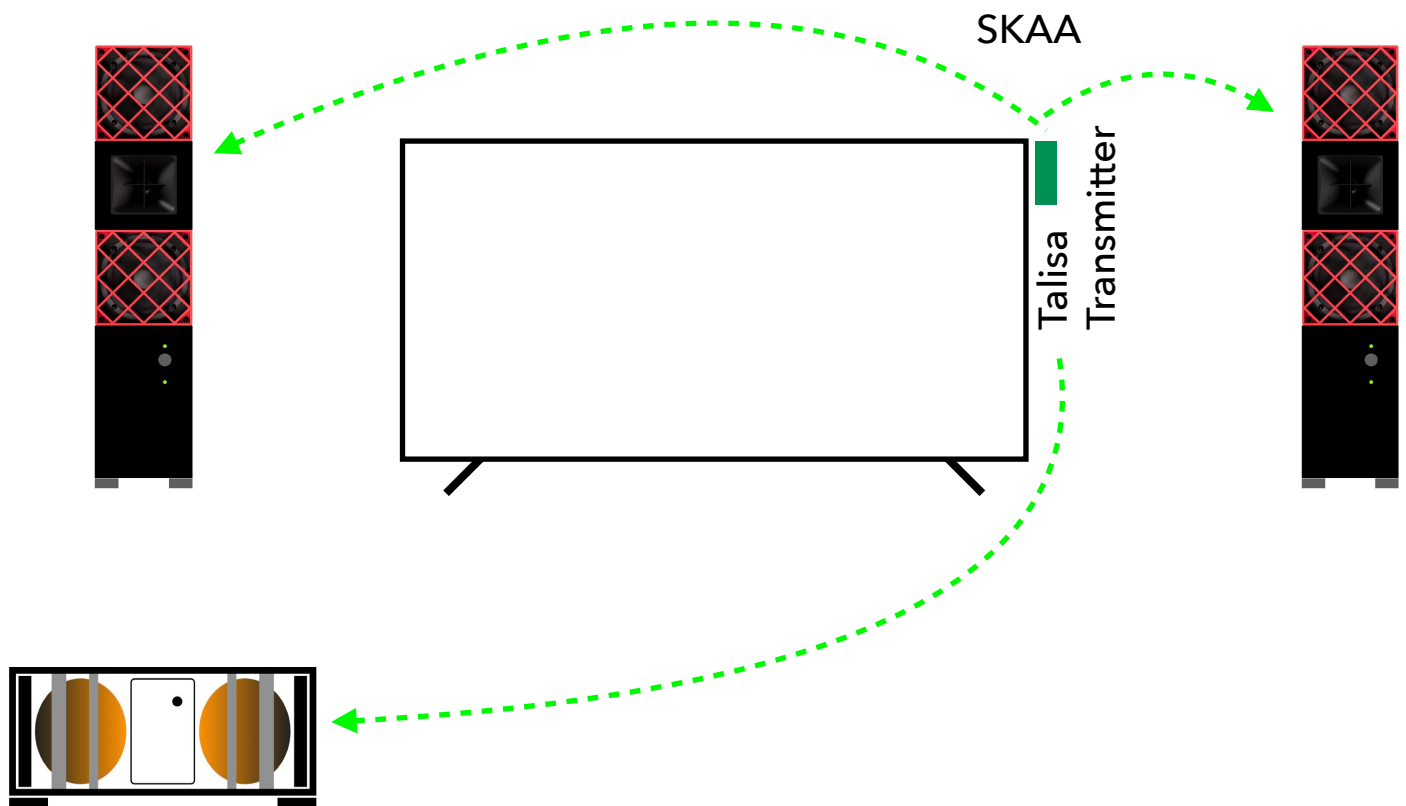

115


pump up the fidelity

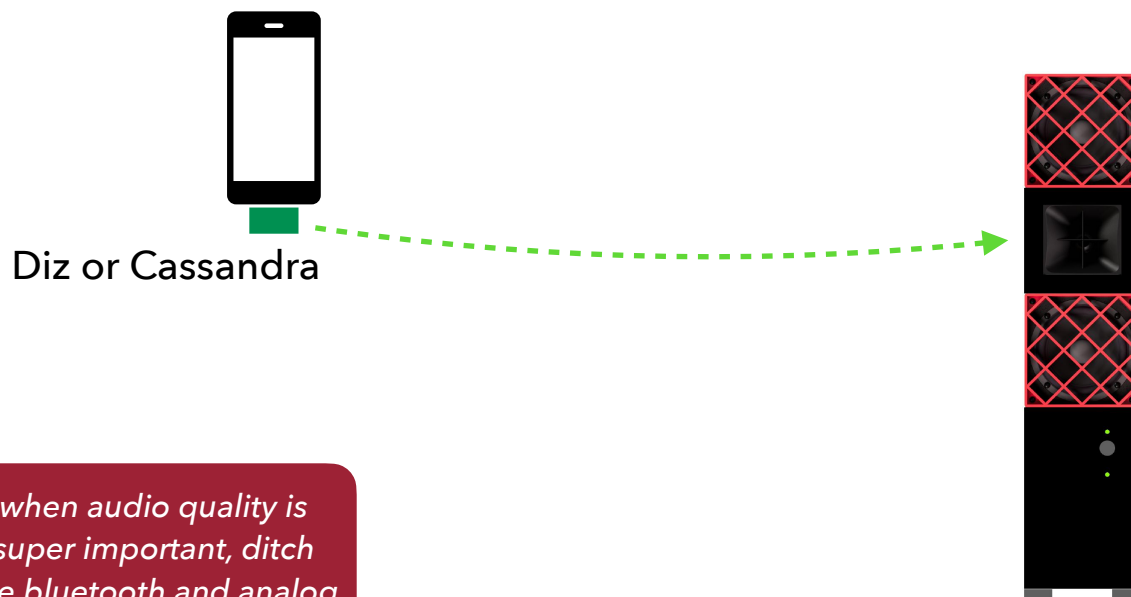

when audio quality is super important, ditch the bluetooth and analog wires entirely and transmit pristine digital audio over SKAA instead

116


pump up the fidelity II

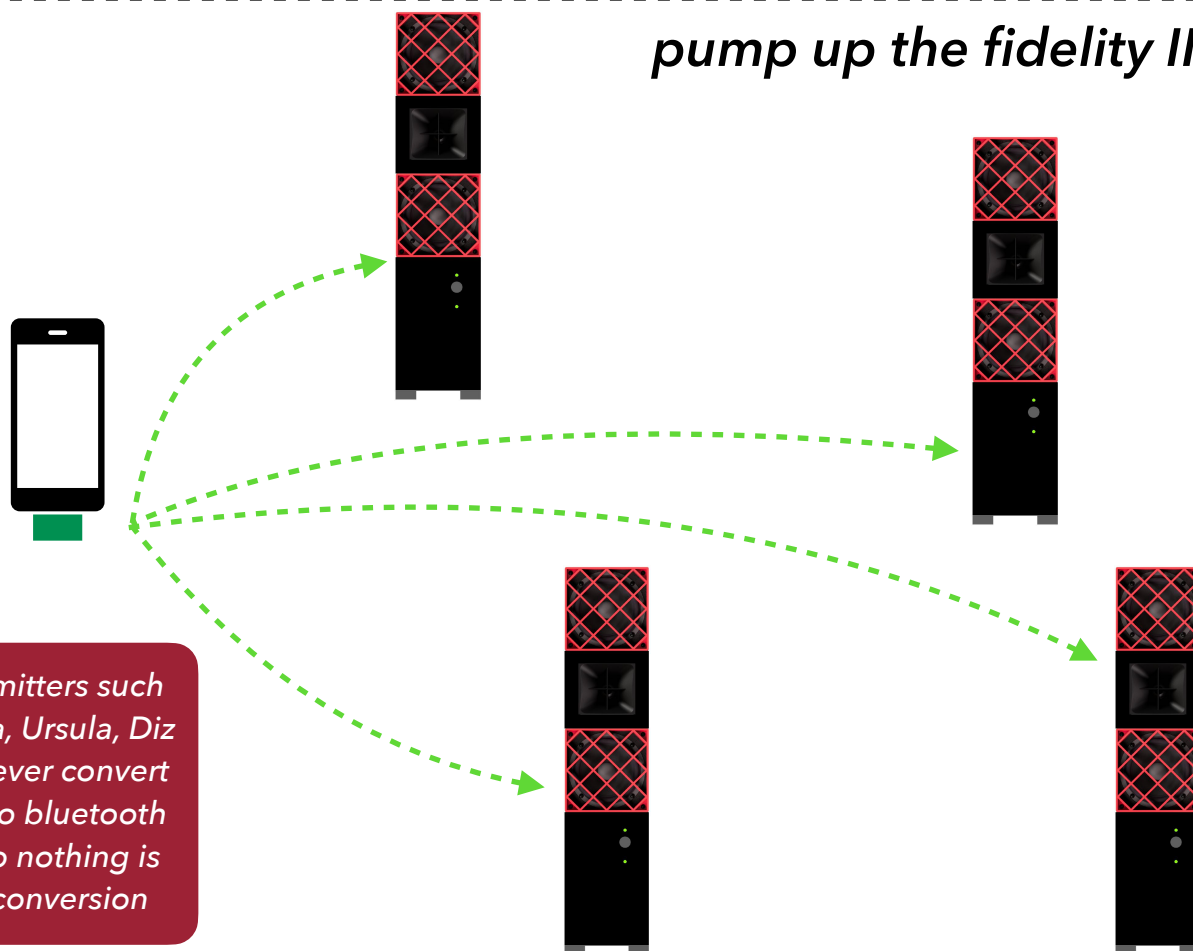

SKAA Transmitters such as Cassandra, Ursula, Diz and Talisa never convert your audio to bluetooth or analog so nothing is lost in the conversion


117

pump up the fidelity III

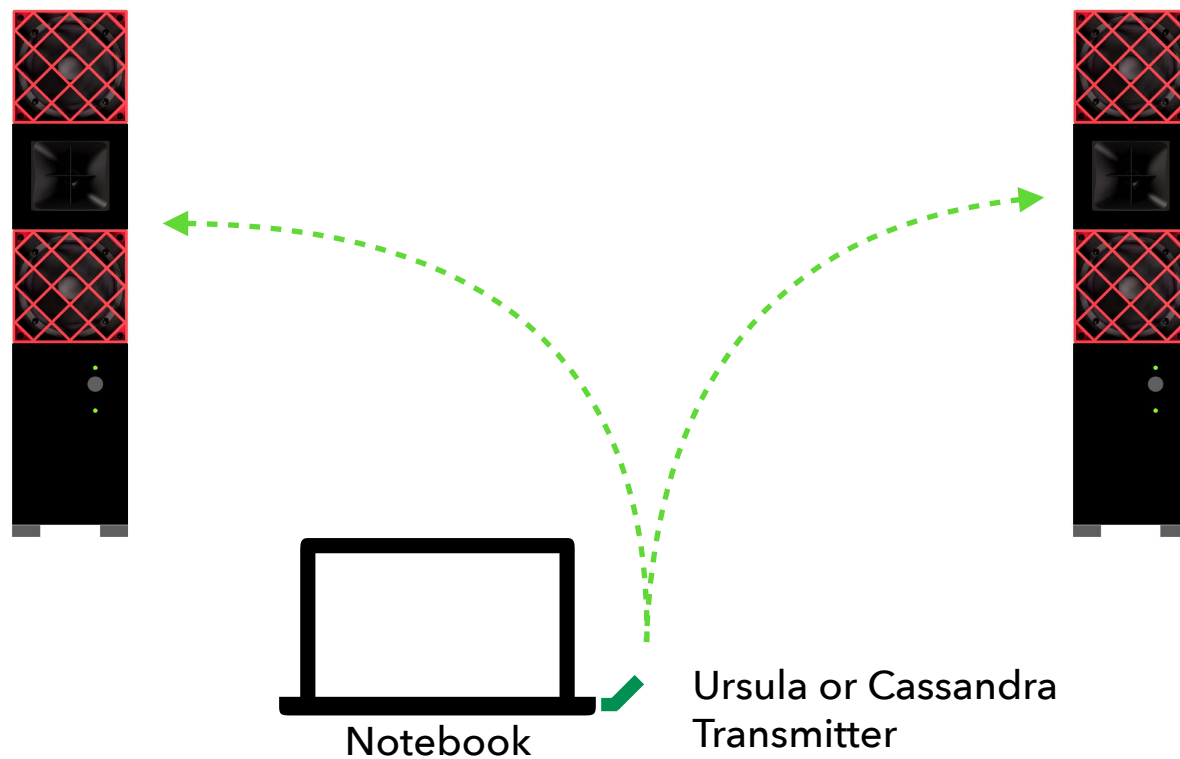


118

pump up the fidelity IV

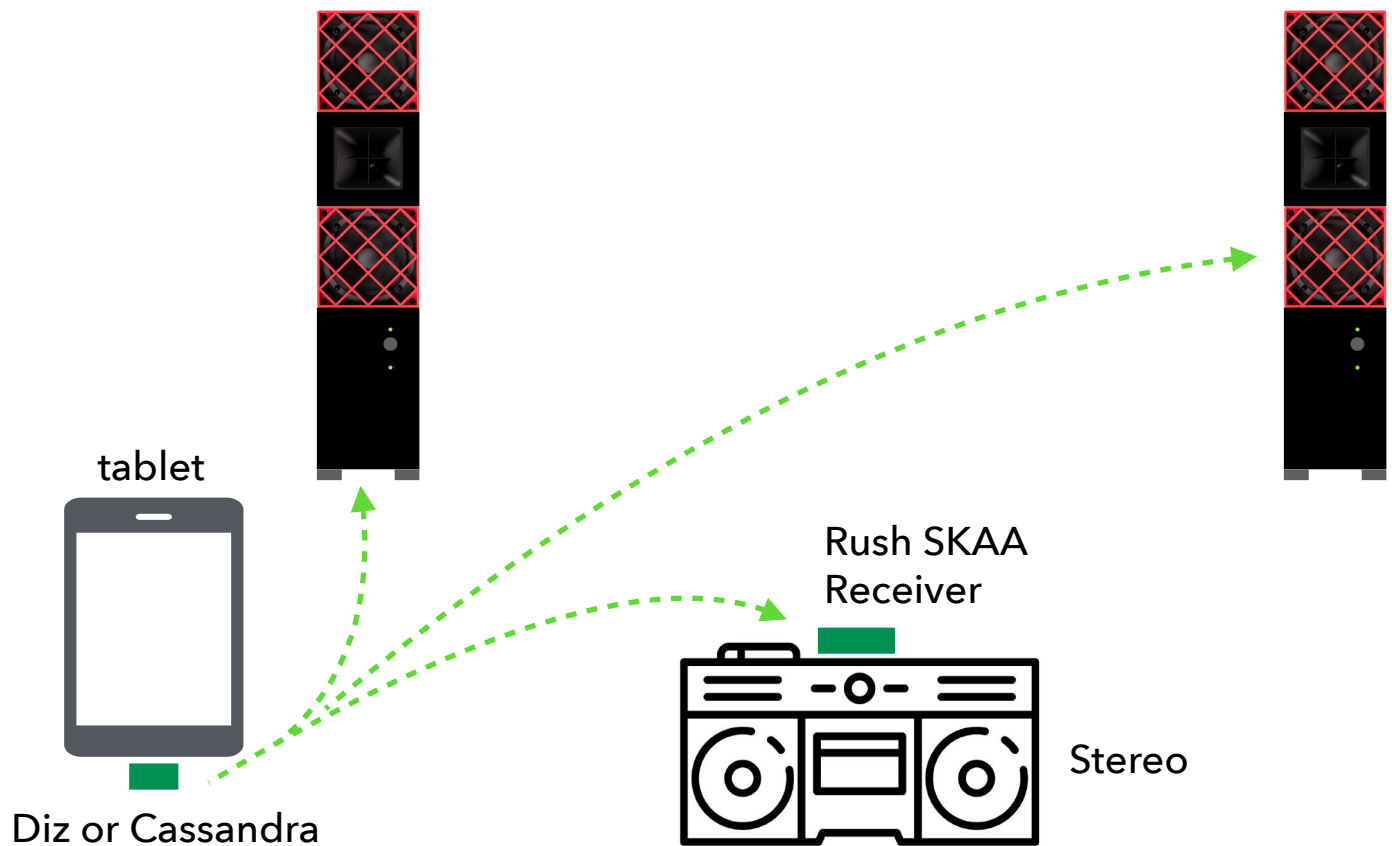


119

hifi party

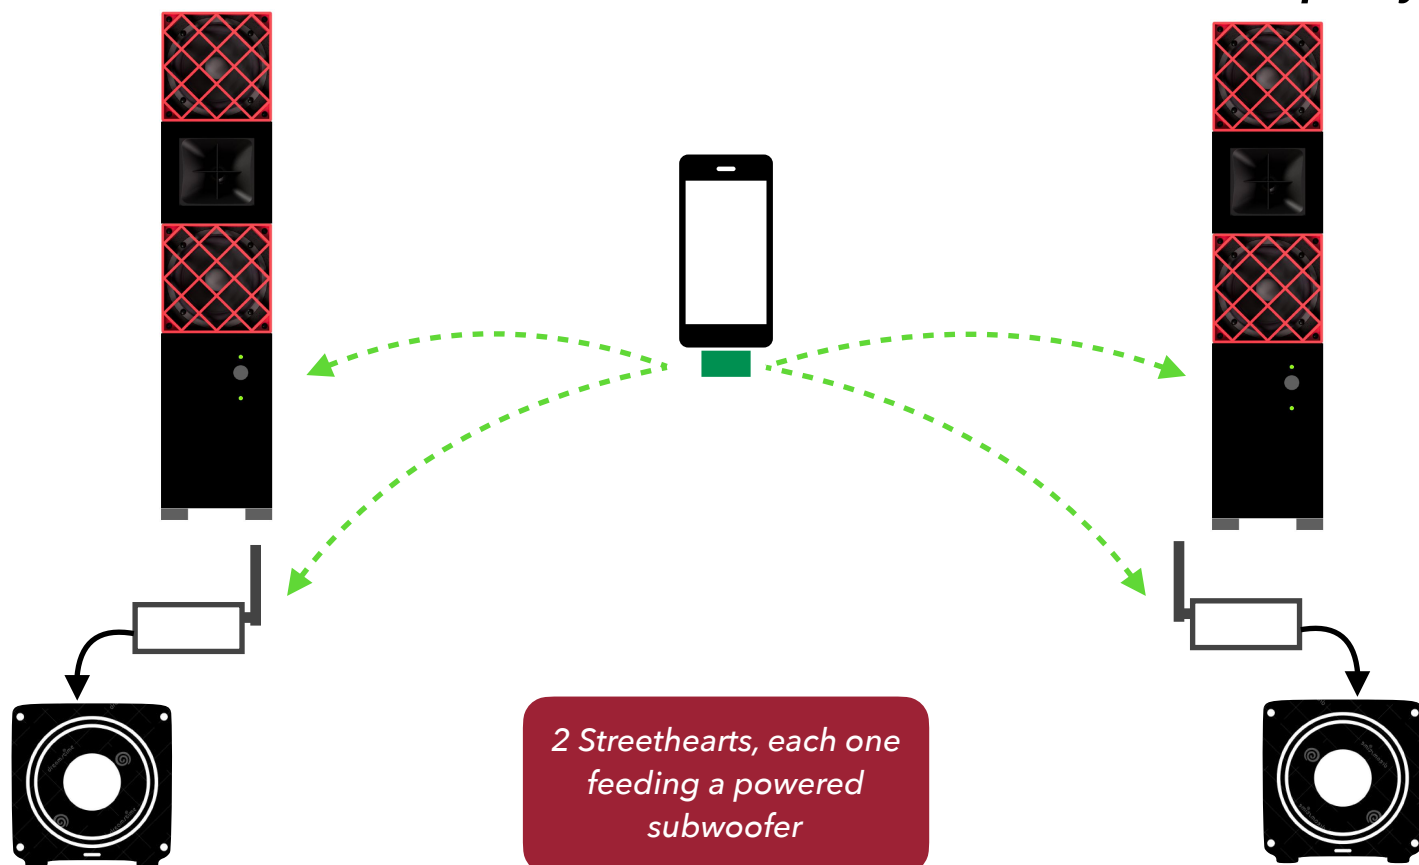


120

hifi party II

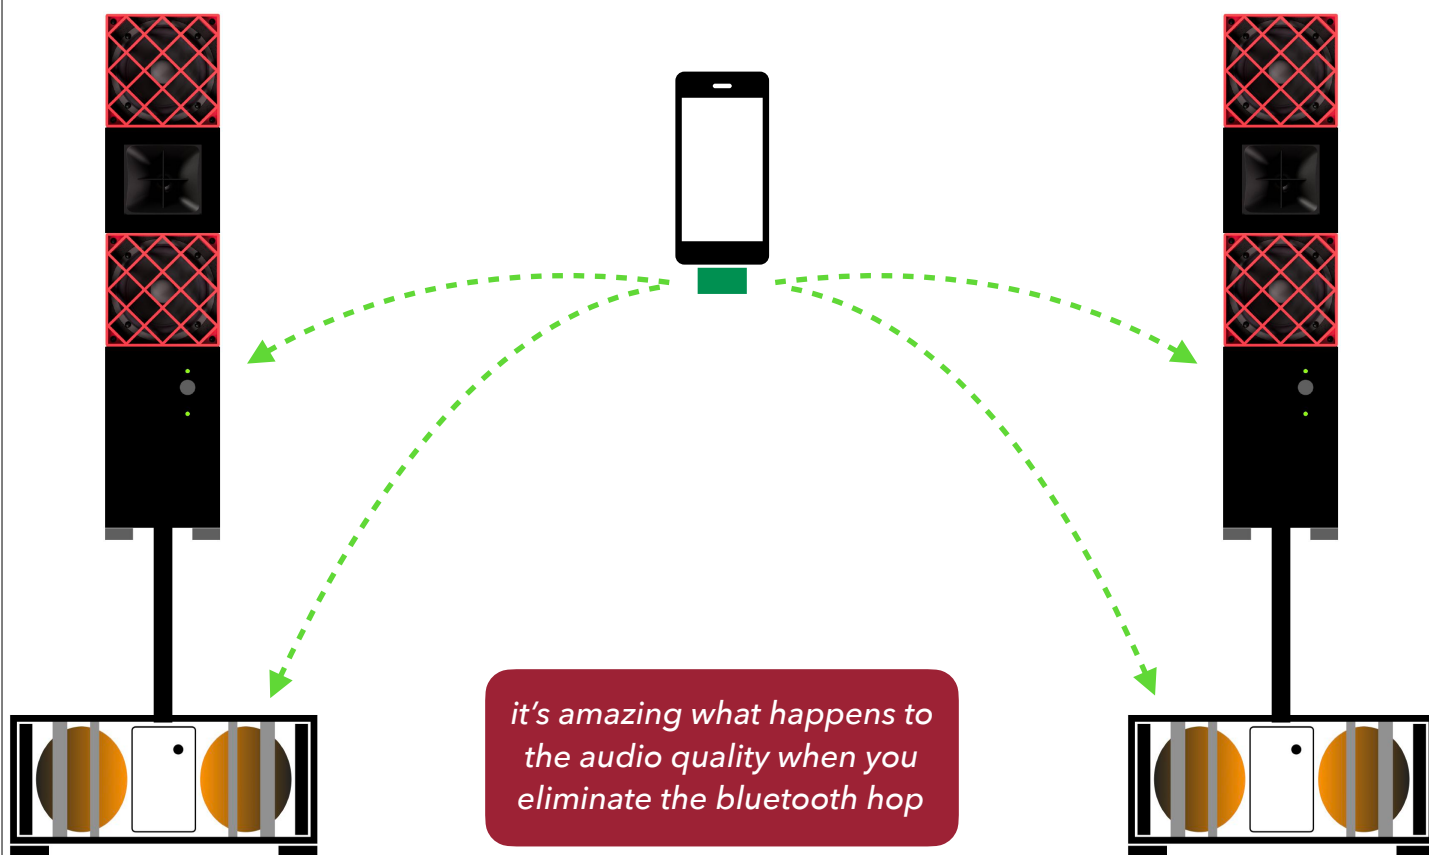

121


... and chill

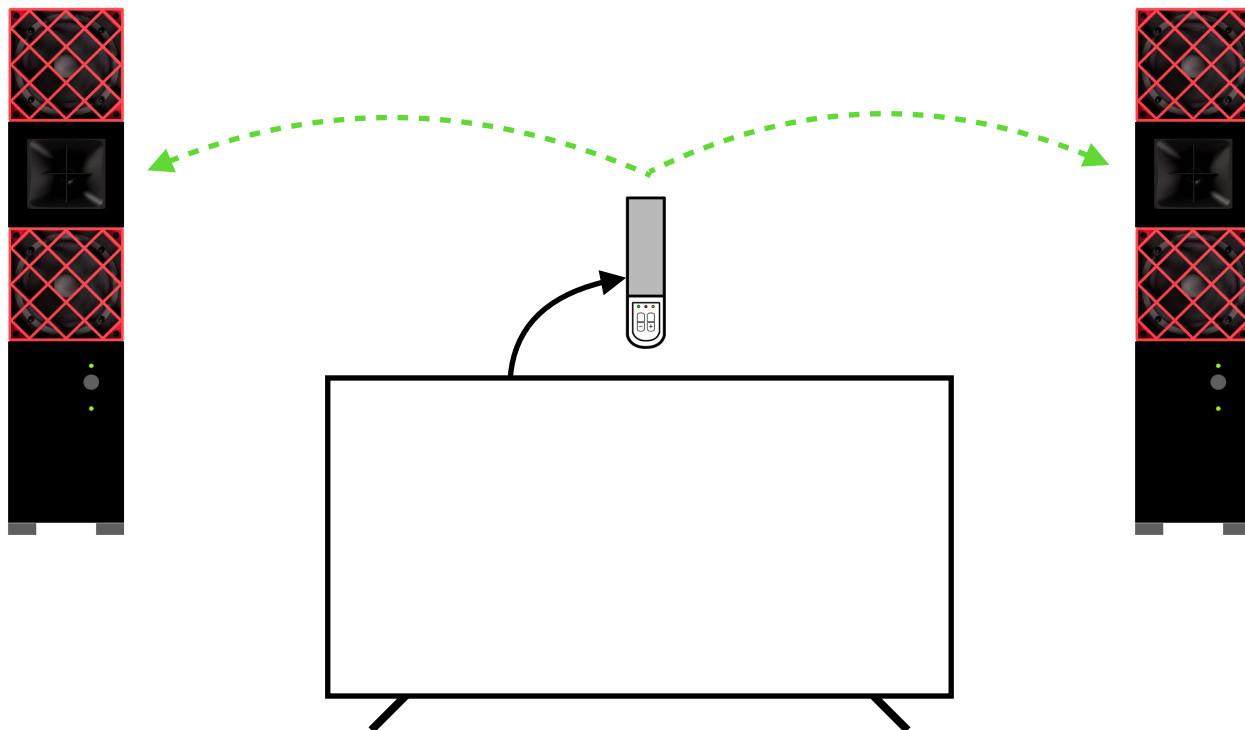

122


... and chill II

the Wet Sounds A-Link+ is a fantastic analog-input SKAA Transmitter with ultra long range and a built-in battery; it has a receive mode, too

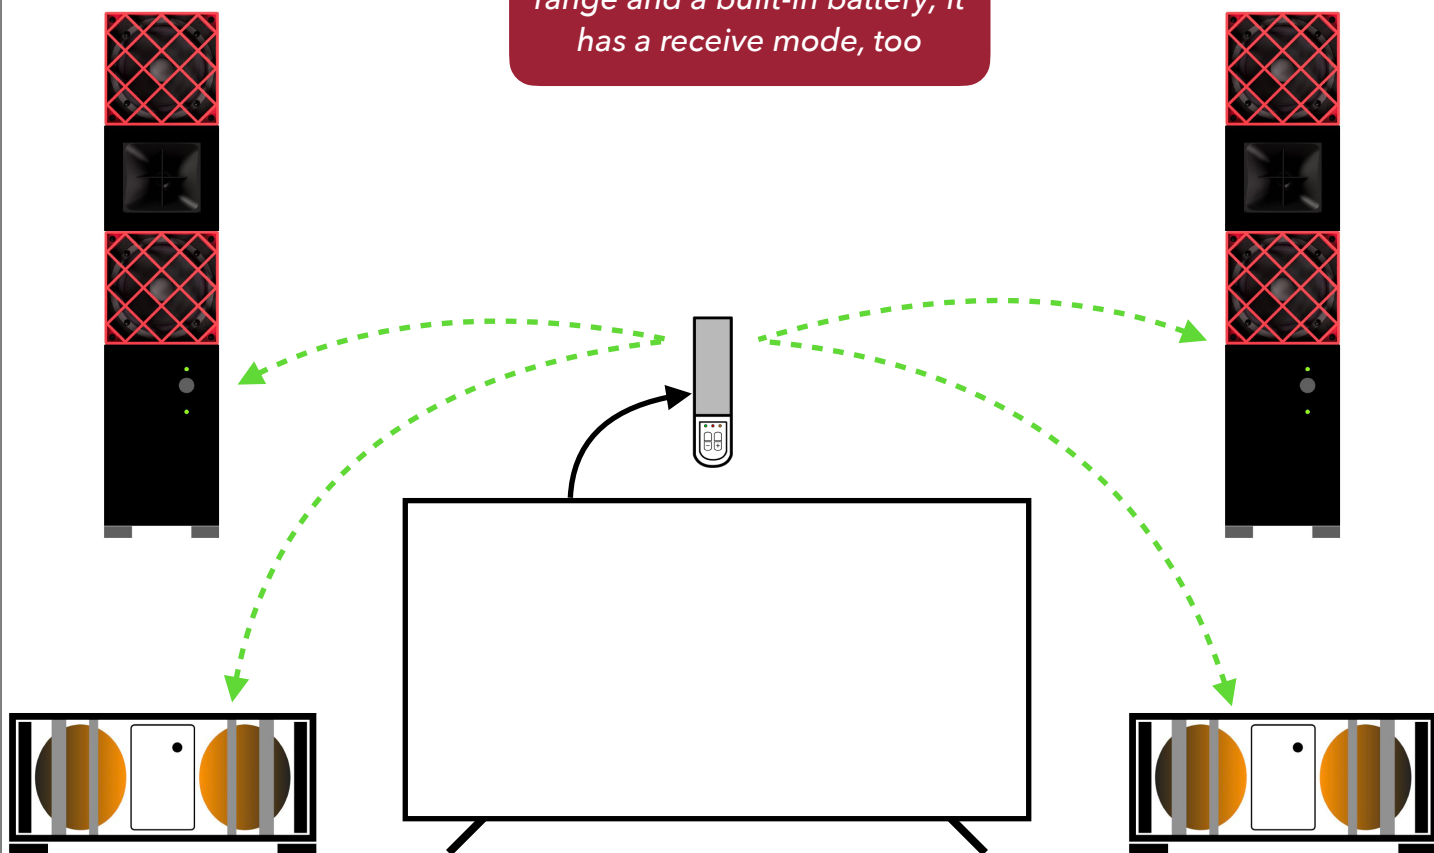

123


watch vids, play games

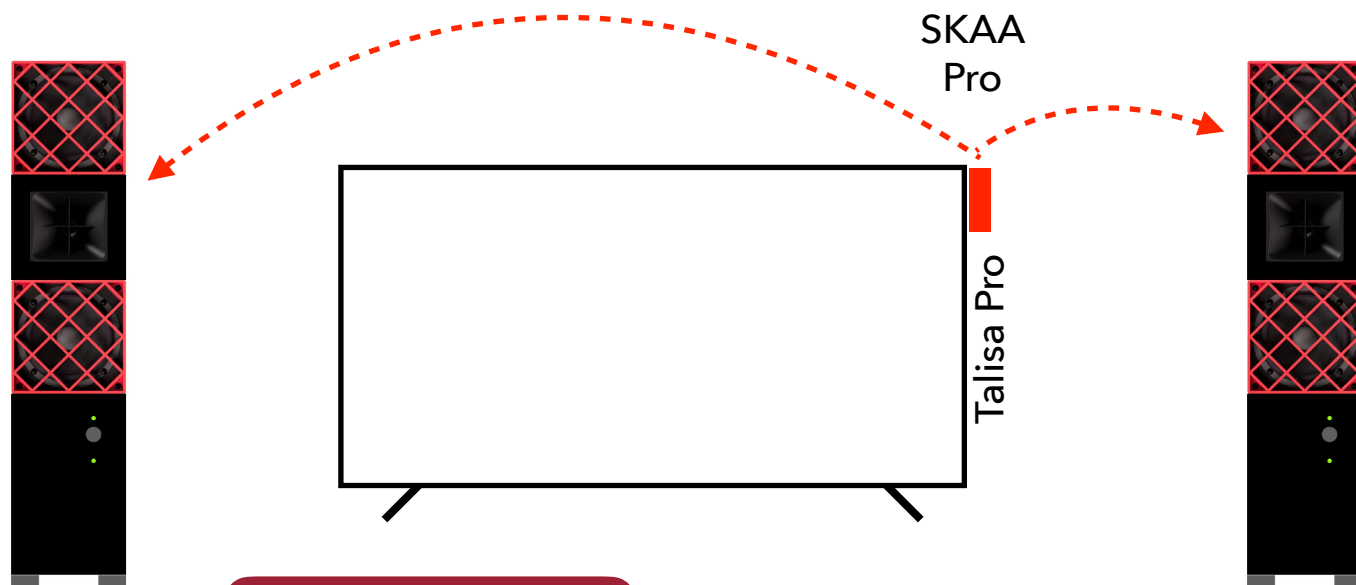

the Talisa and Talisa Pro Transmitters are both capable of taking either Toslink or S/PDIF (coax) as digital input


124

stereo TV extreme bass

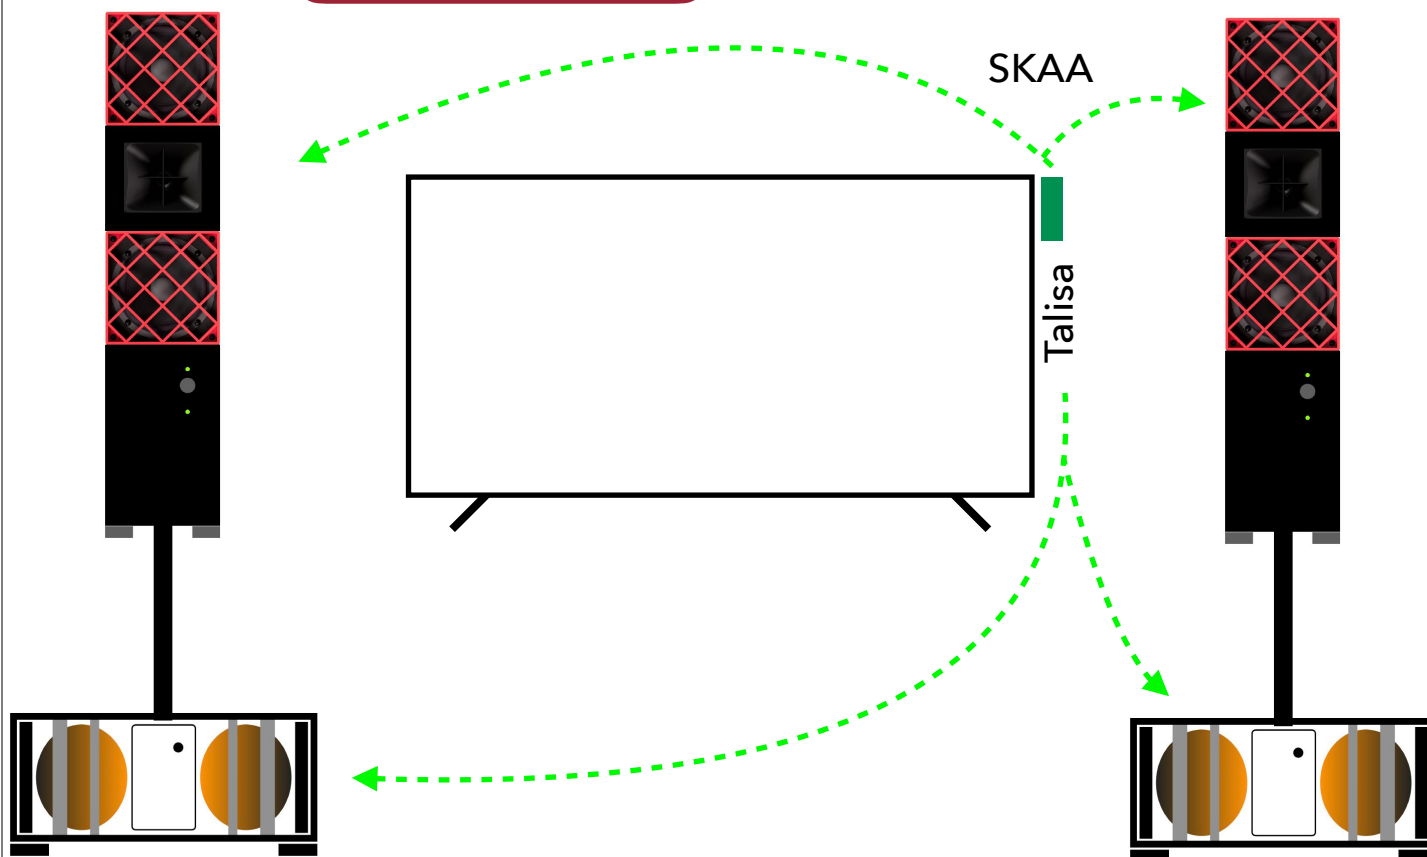

125


game on III

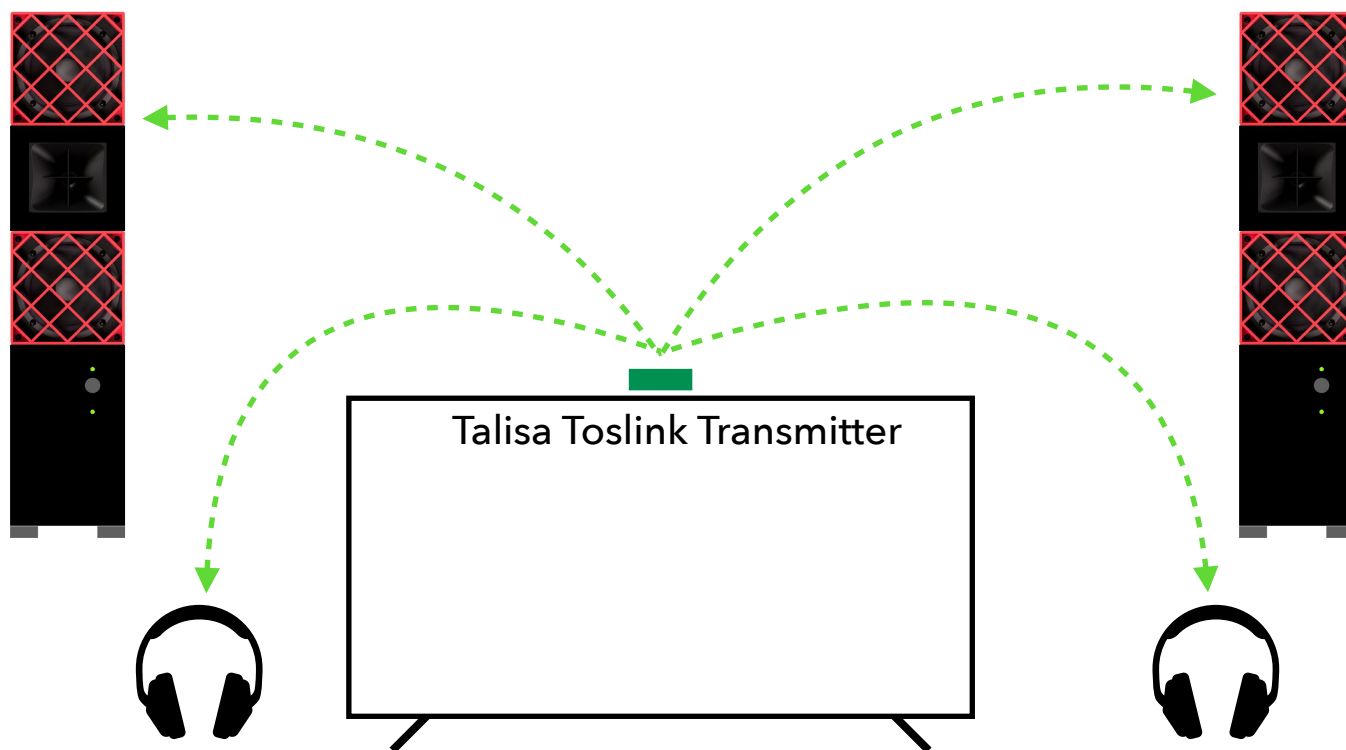

126


game on IV

the Wet Sounds A-Link Plus doesn't have a pure digital path like Talisa, but it delivers about 3x the reliable range (distance) of Talisa, which is great if you want to hear the game in the back yard

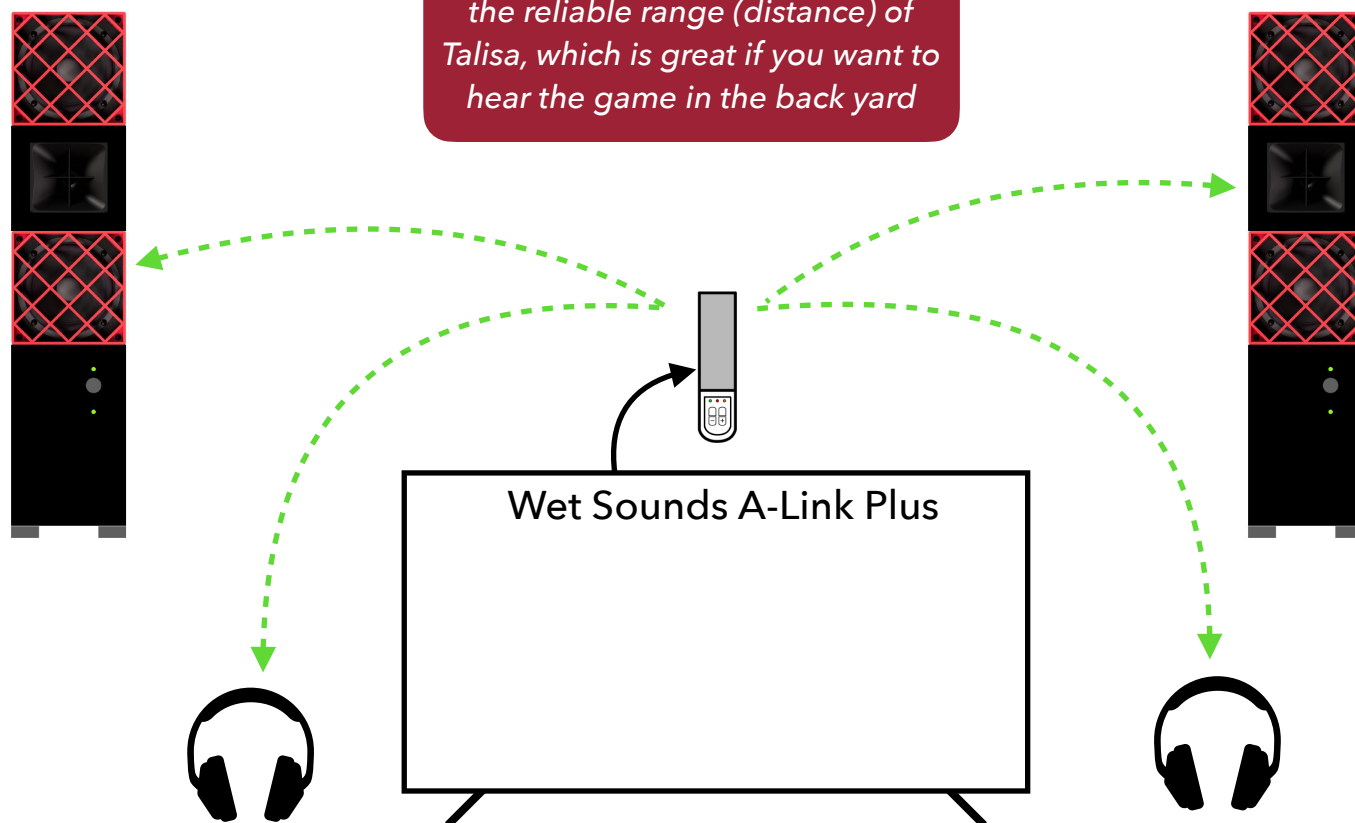


127

outdoor movie

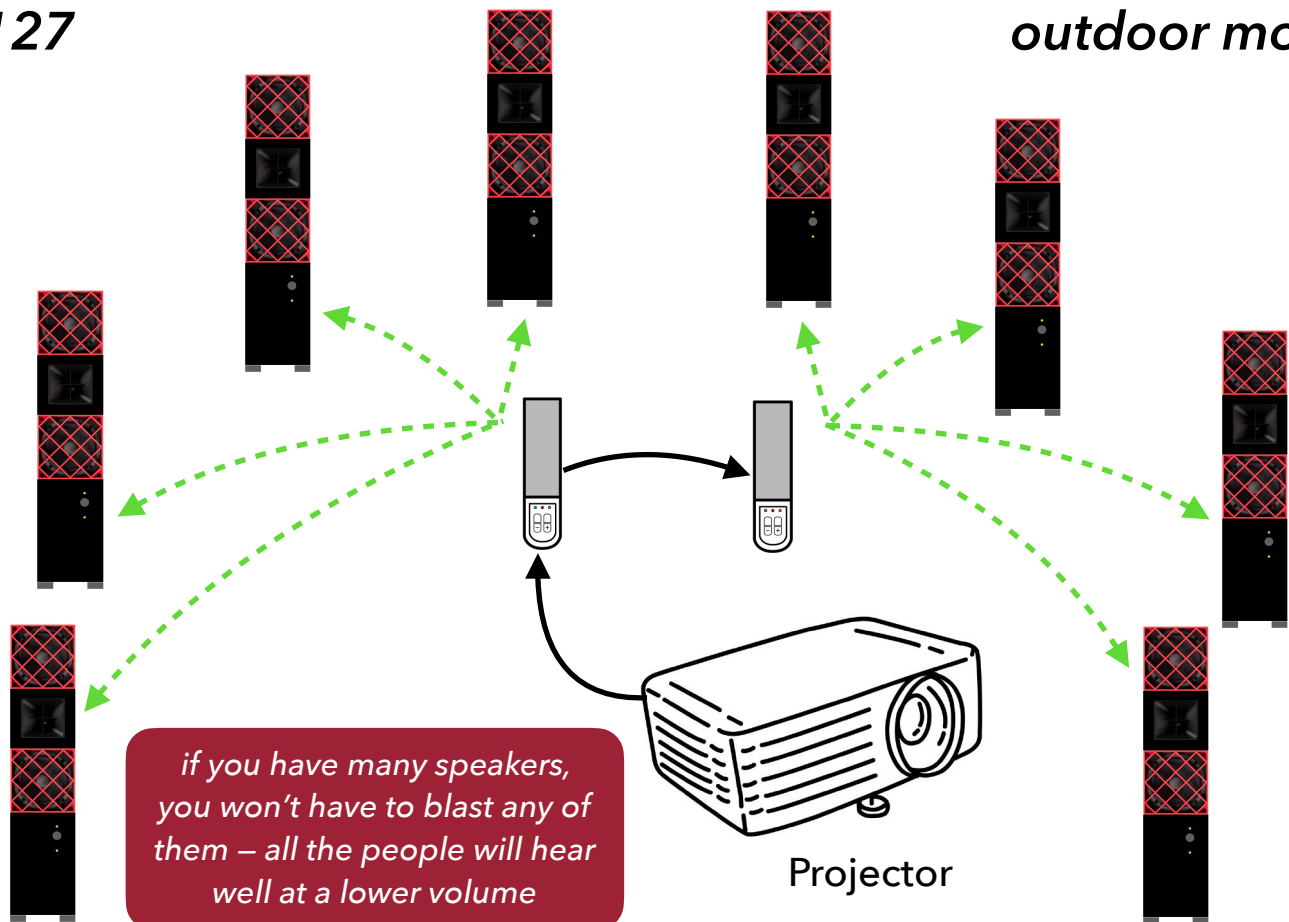


128

sail-in movie

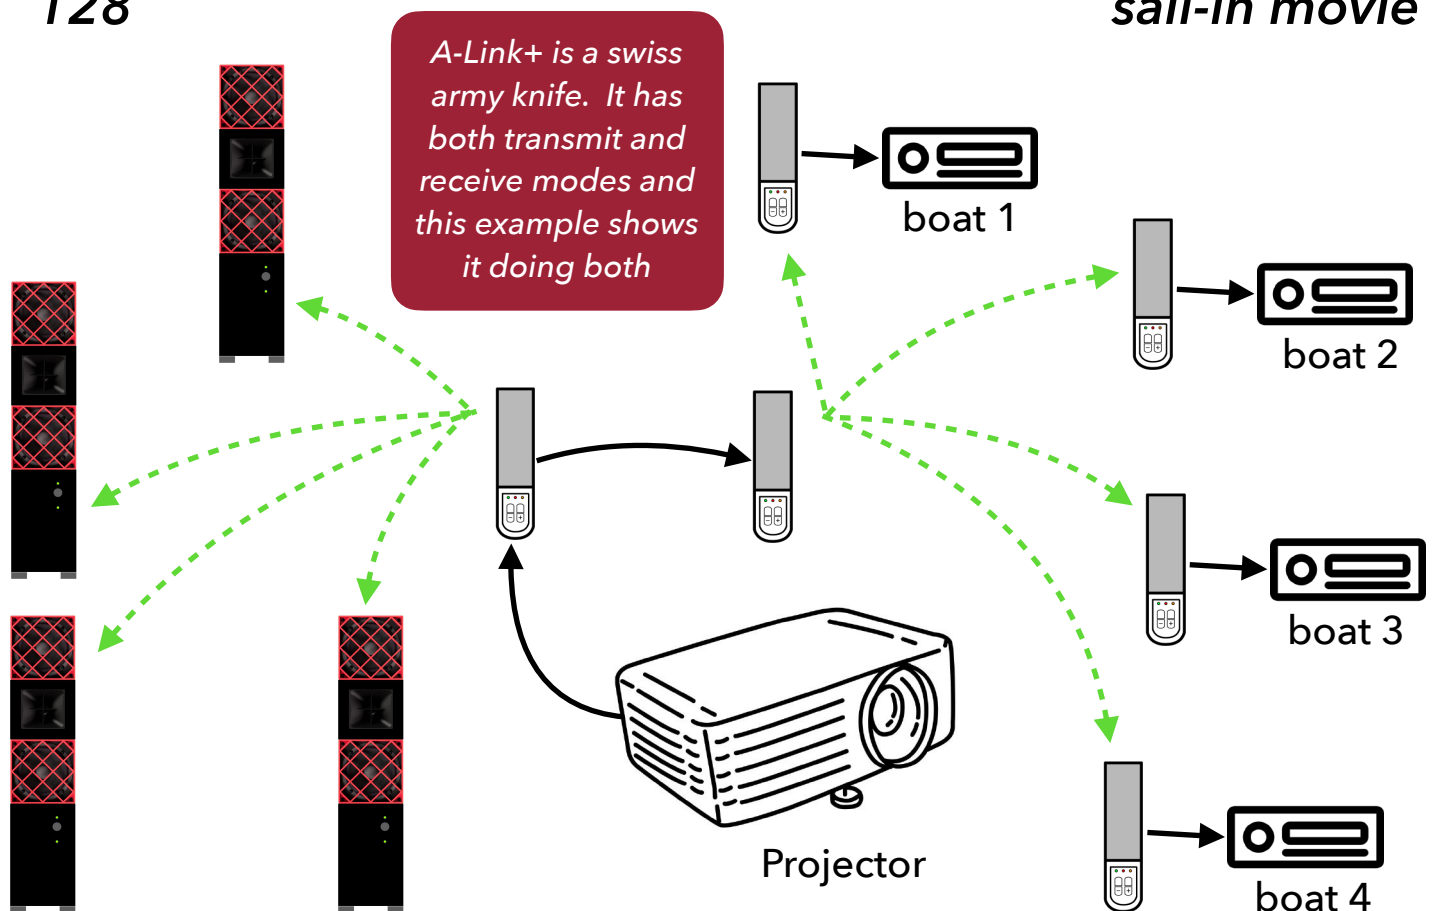


129

direct from Sony PS5

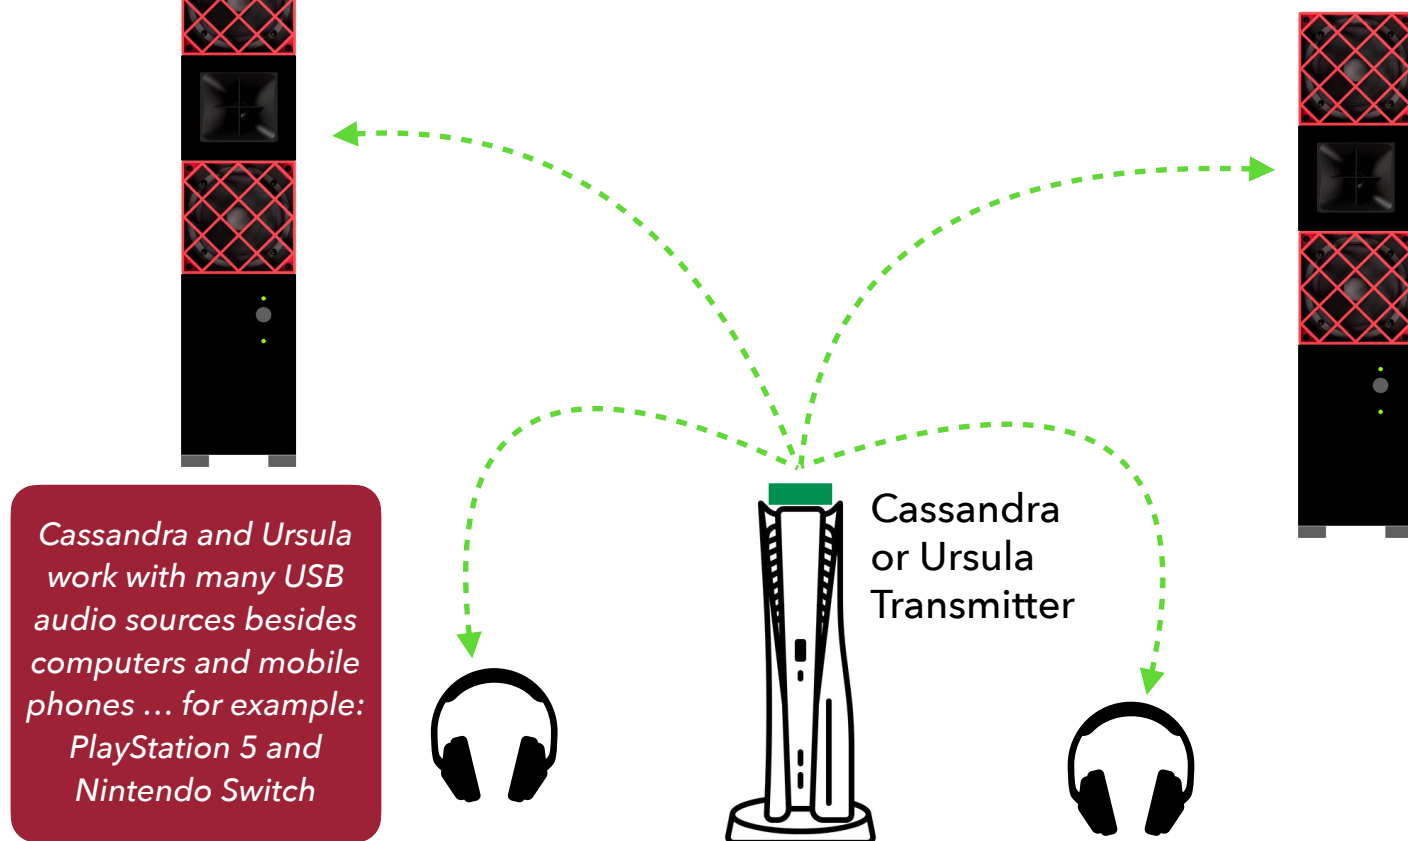

130


direct from Nintendo Switch dock

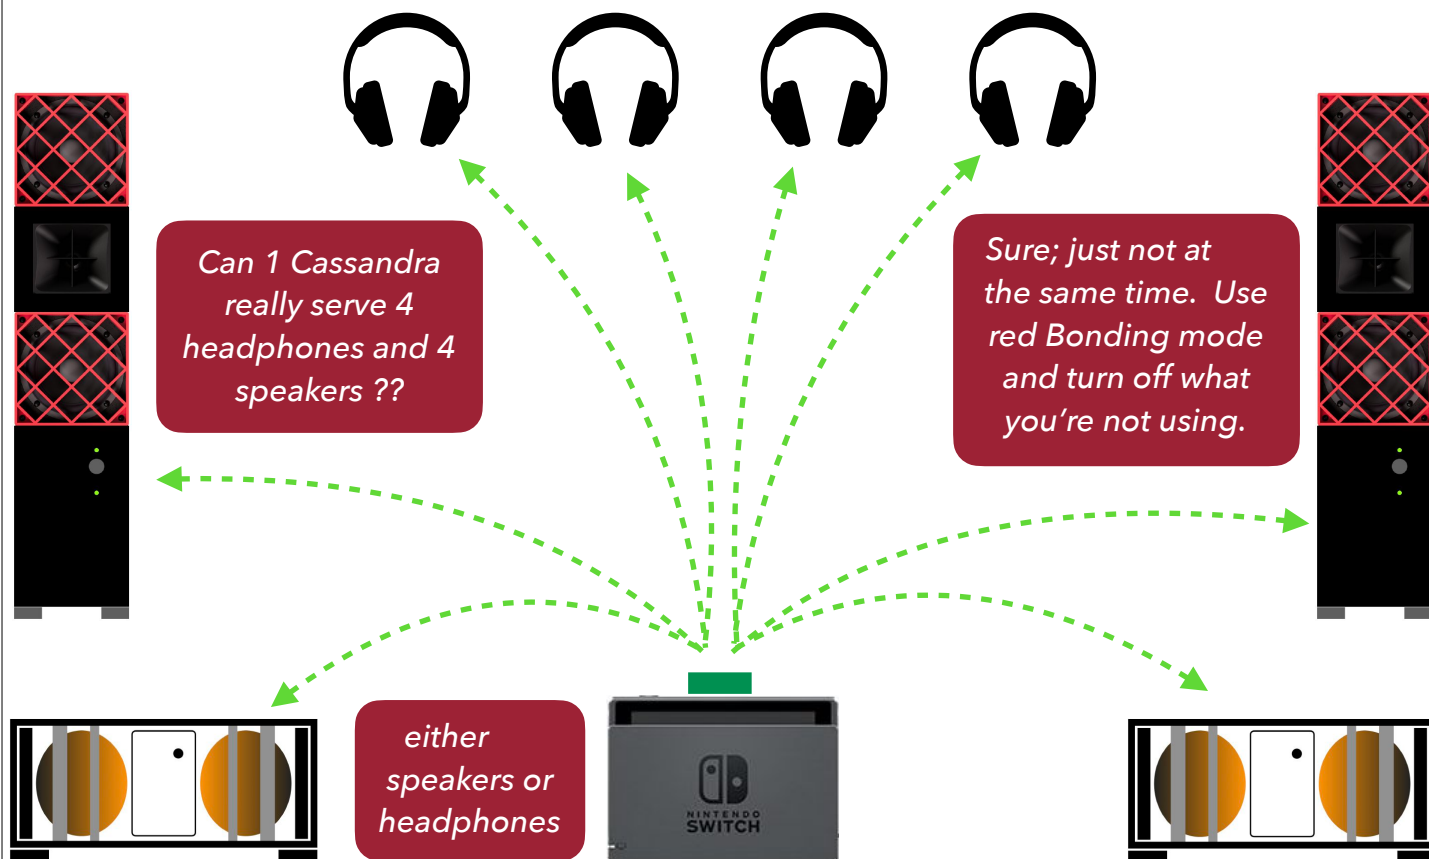

***Talk & Sing
with Mics***


131

talk & hawk

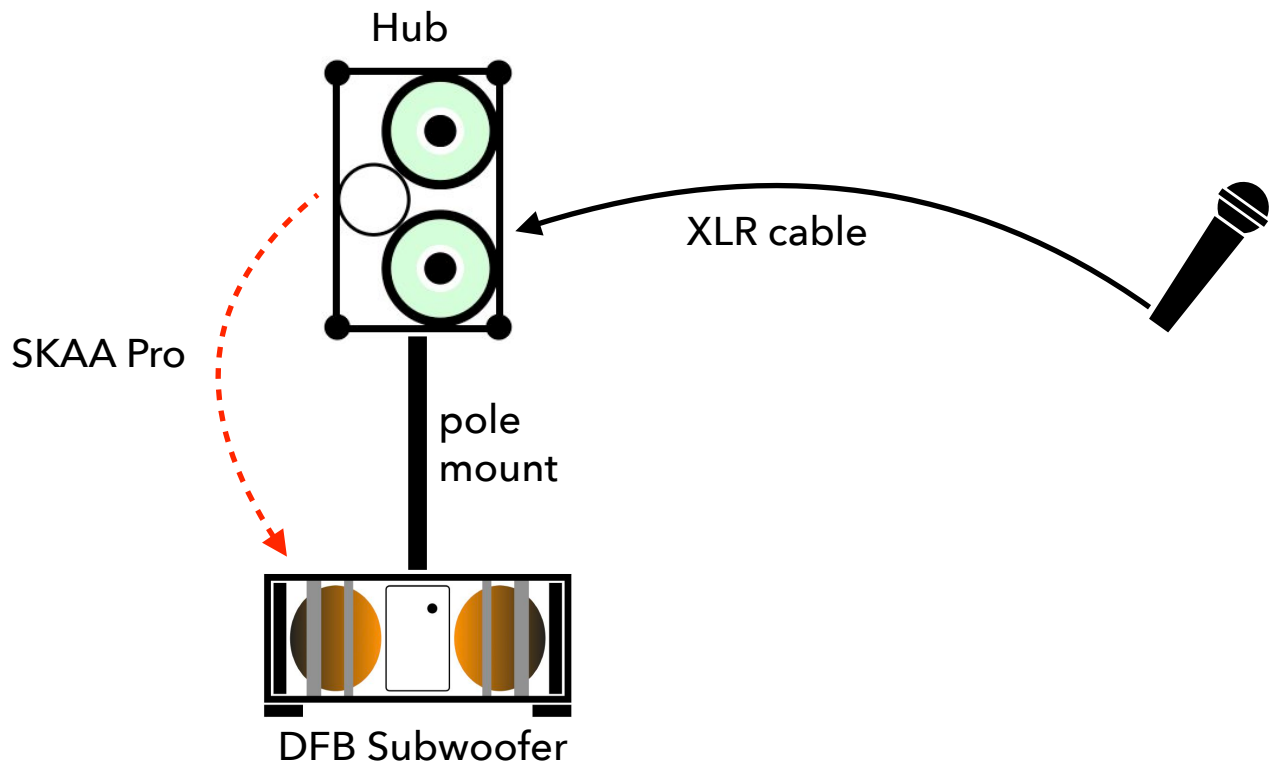


132

... more coverage

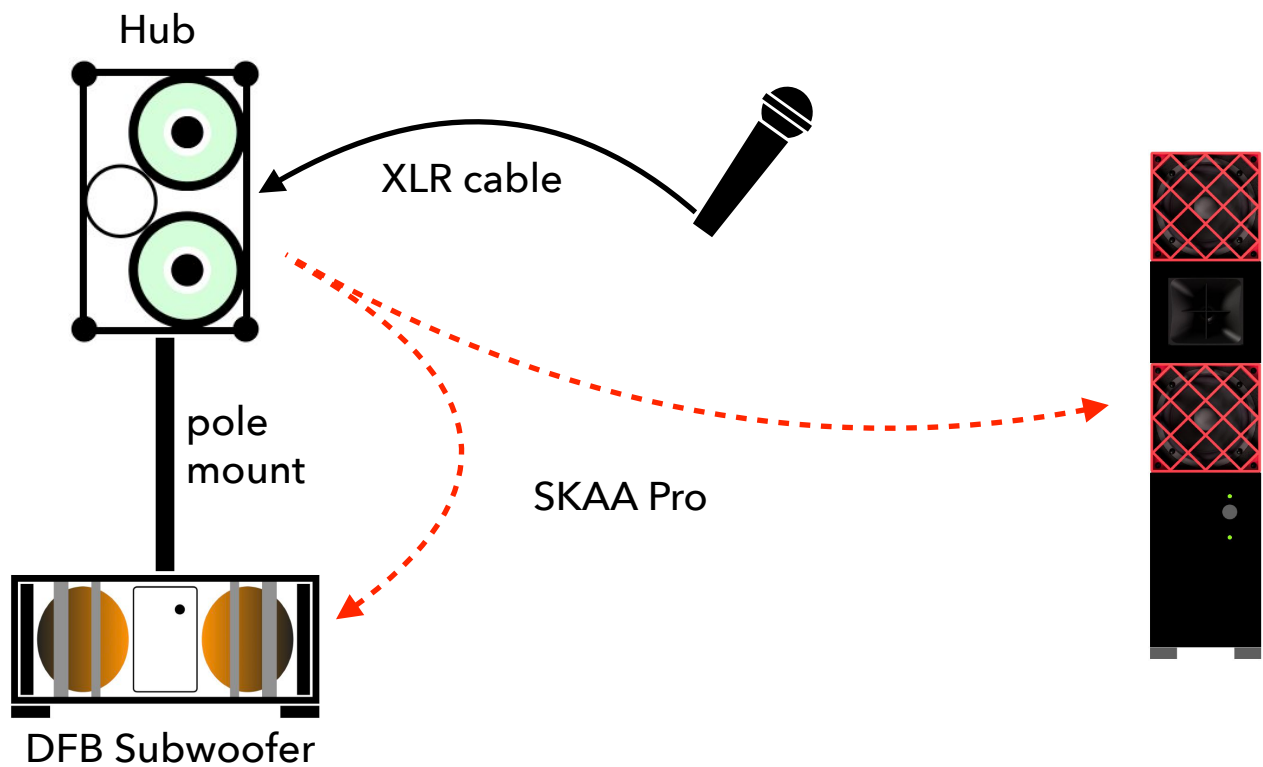


133

sing with background music

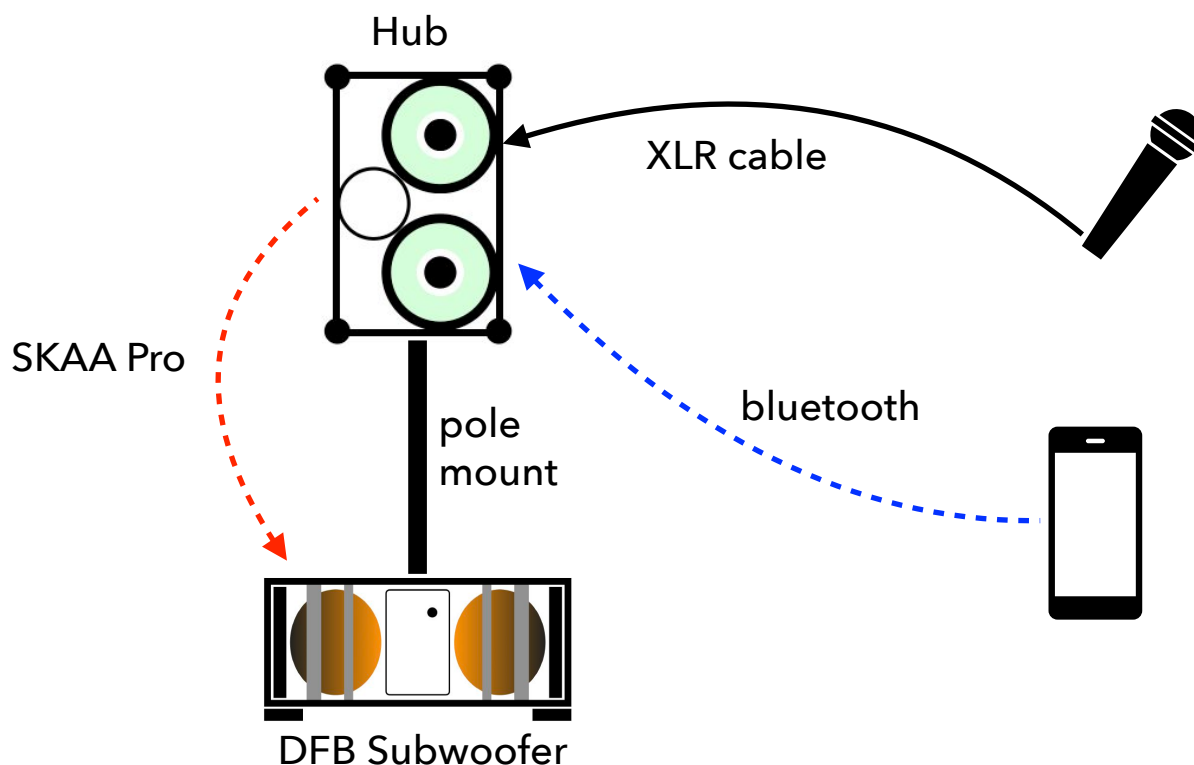


134

... more coverage

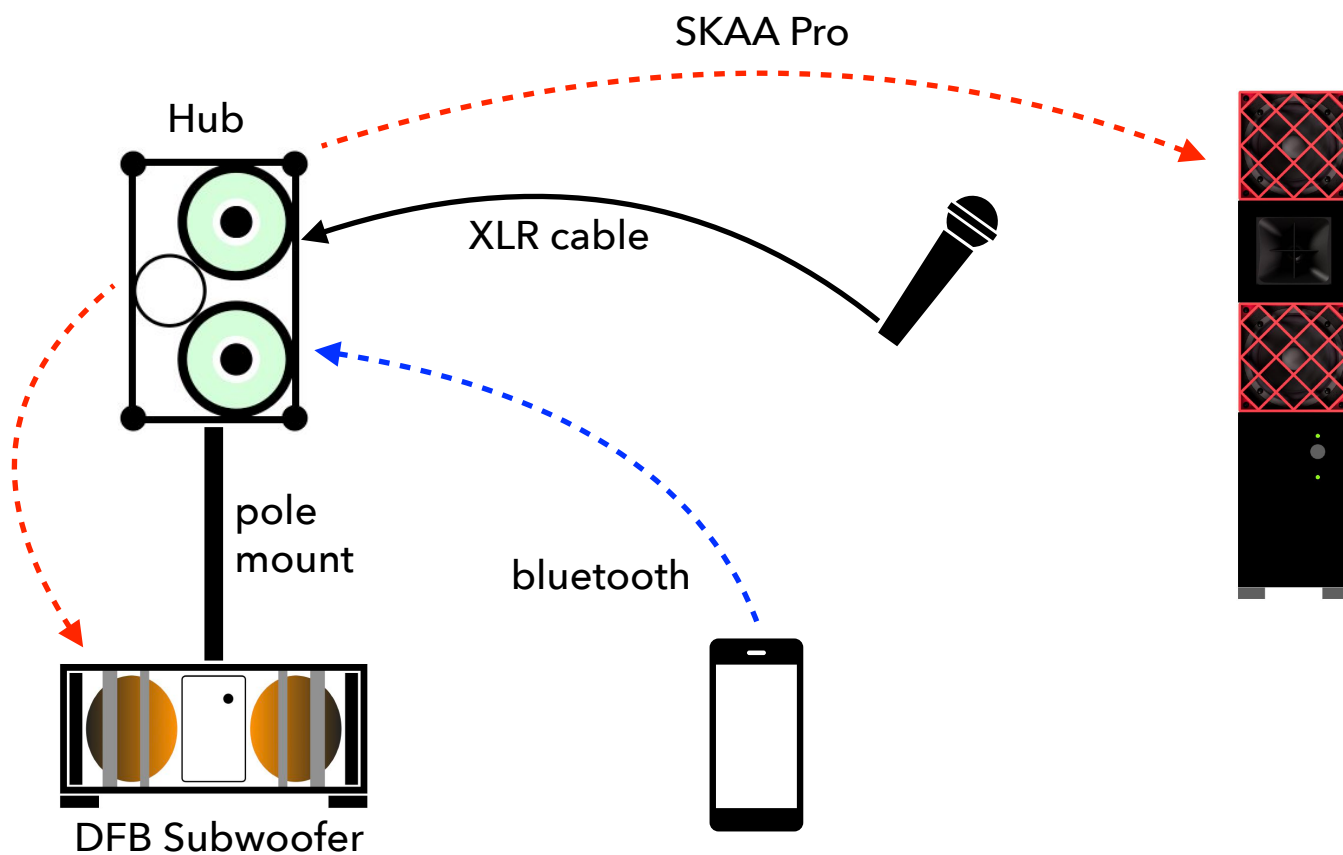


135

... go completely wireless

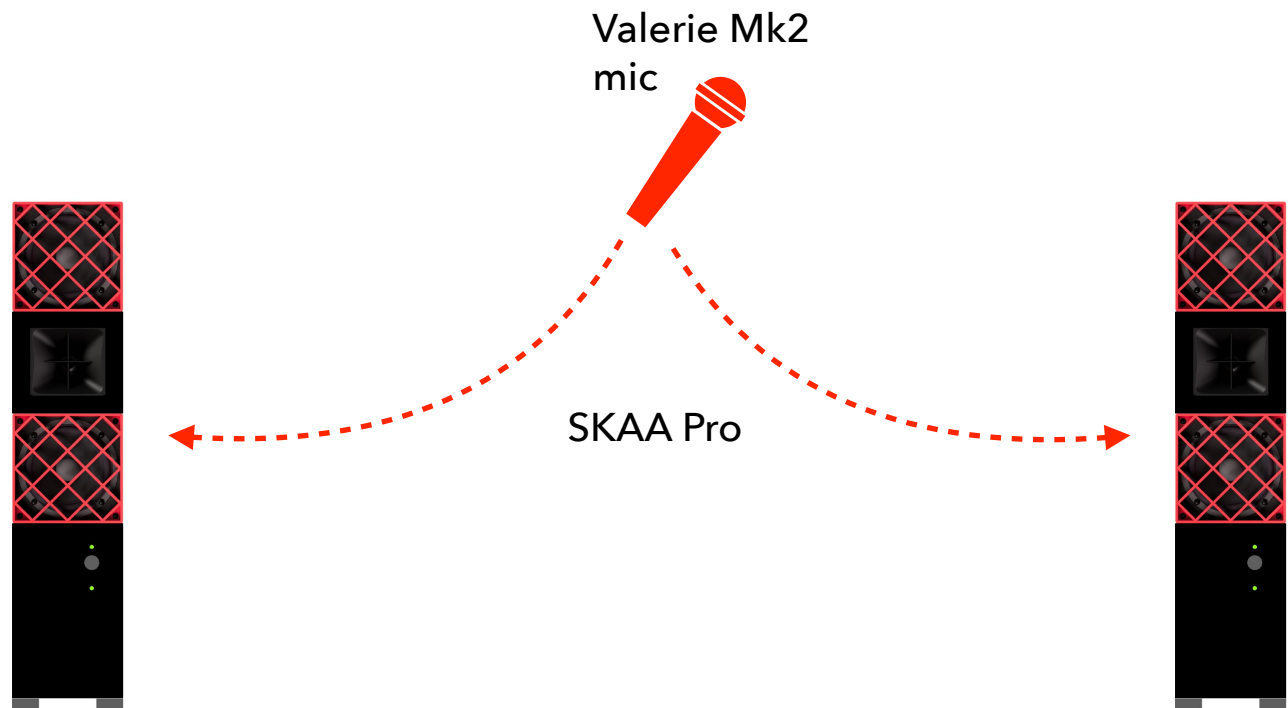


136

... with a backing track

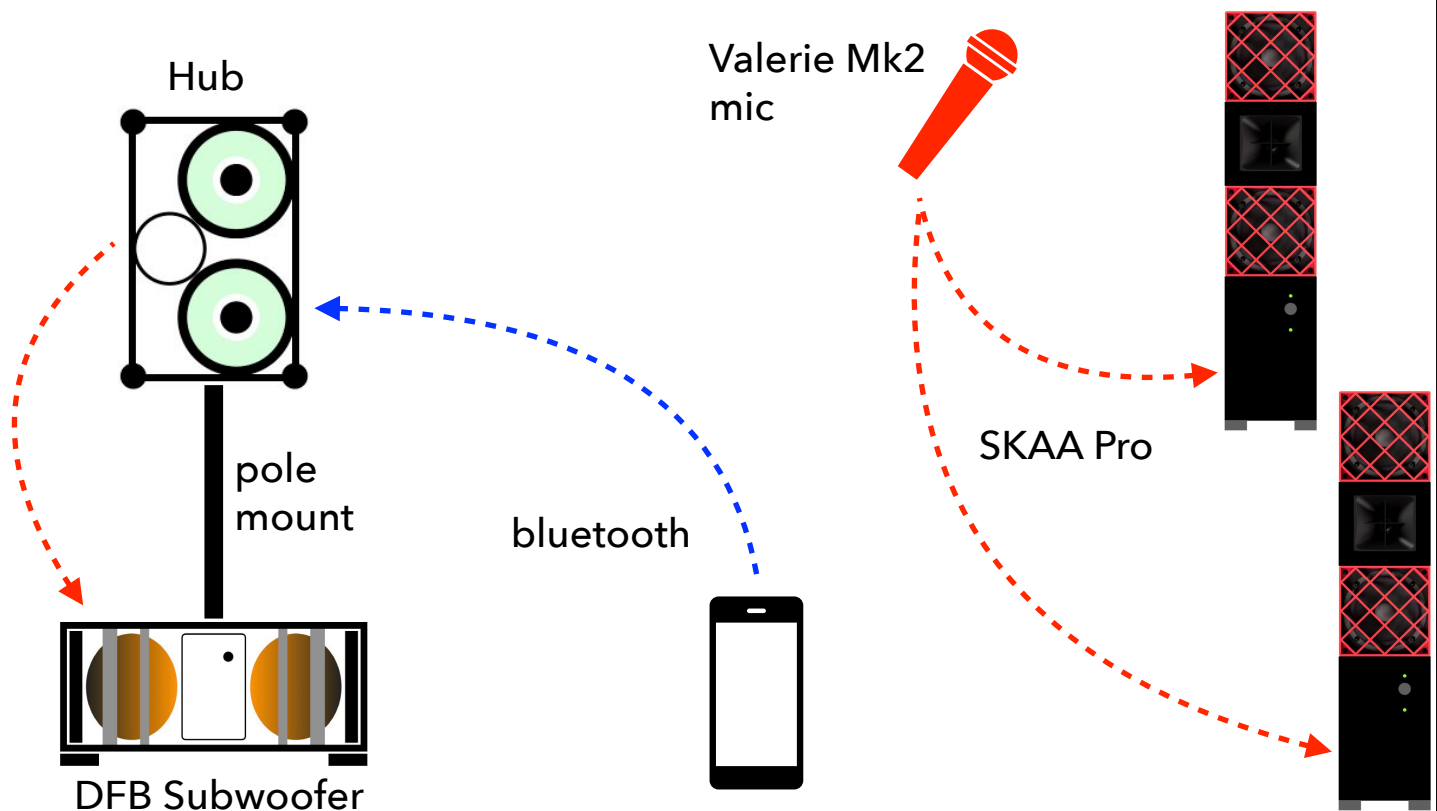


137

... improvise a mic for Karaoke

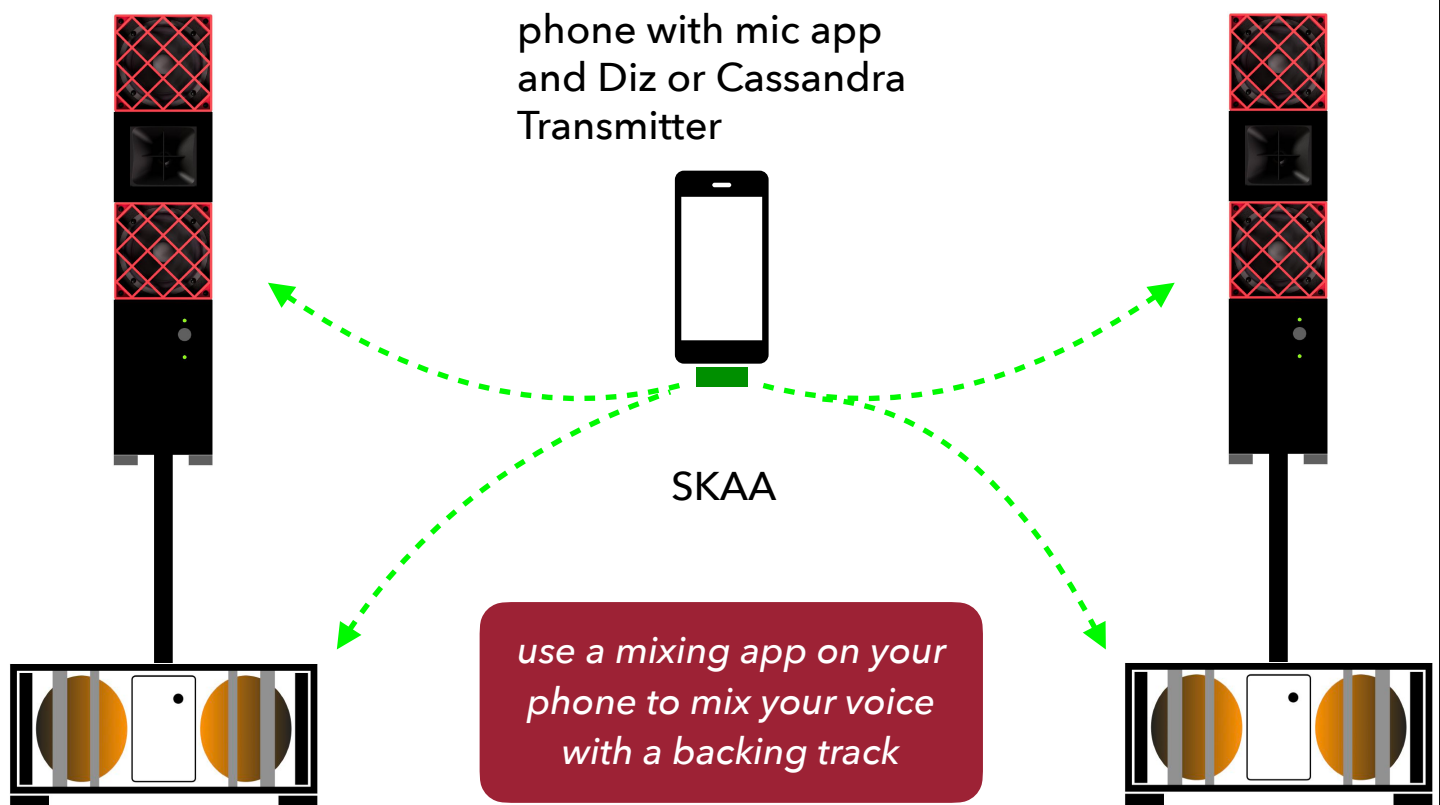



138

2 people can talk or sing sans real mics

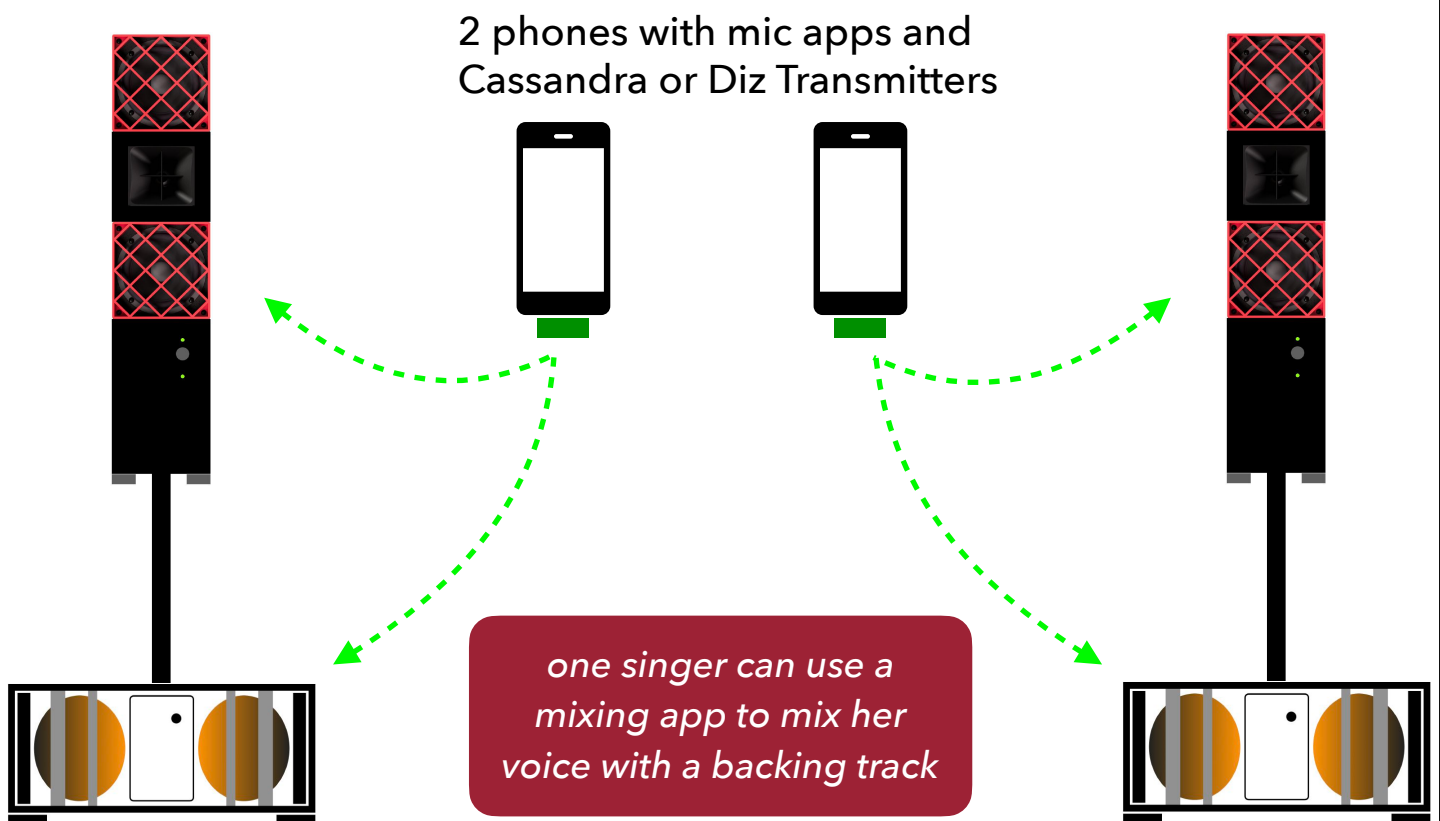

139

solo karaoke

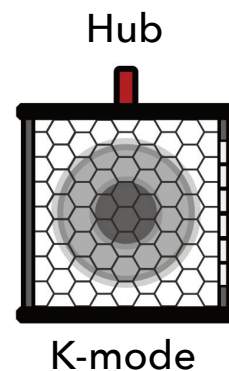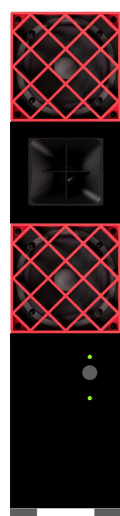



SKAA Pro

Valerie Mk2

use a Hub speaker which supports K-mode such as Electrotec Stage One or Wet Sounds Portable


140

duet K

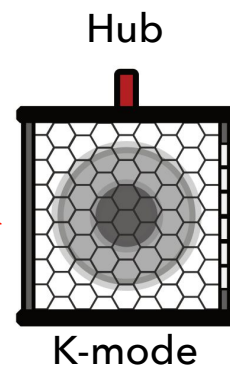


141

duet K II

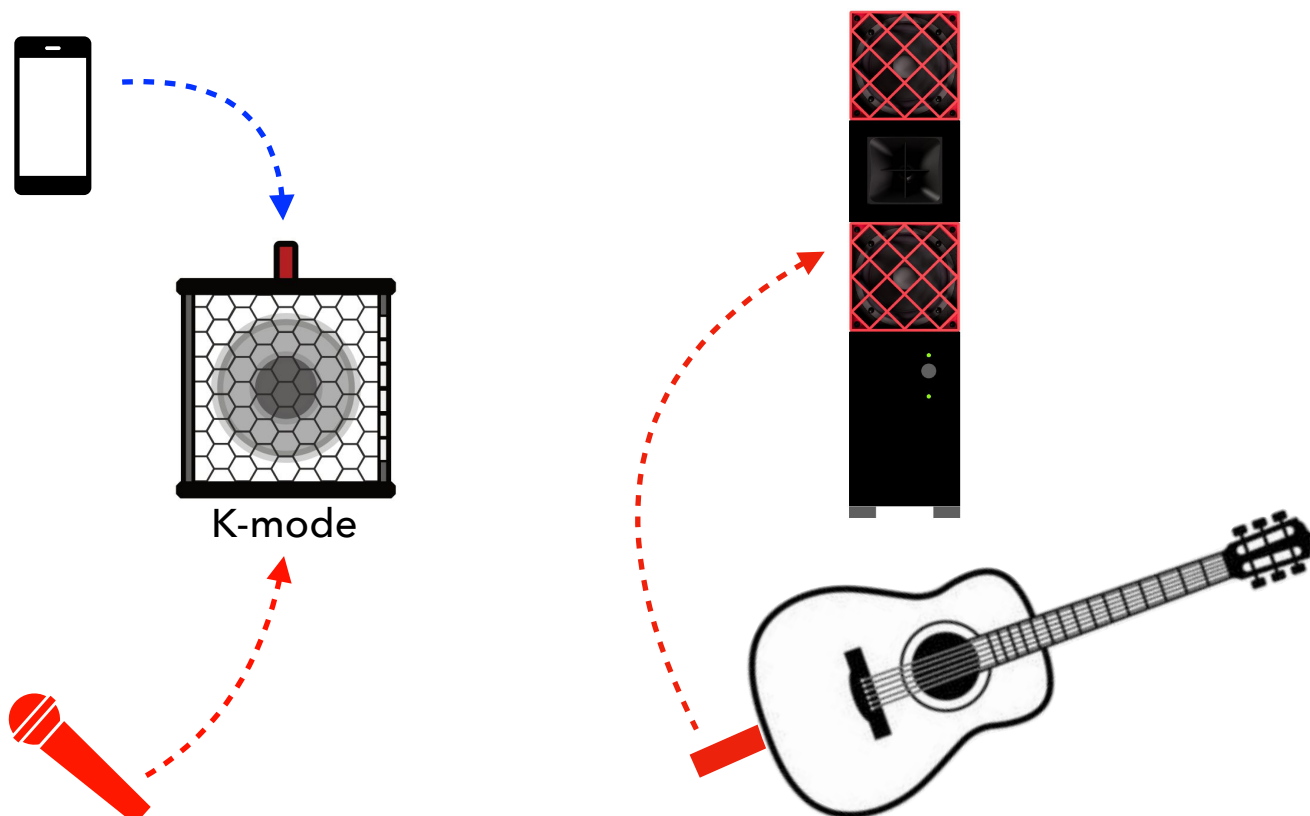


142

trio K

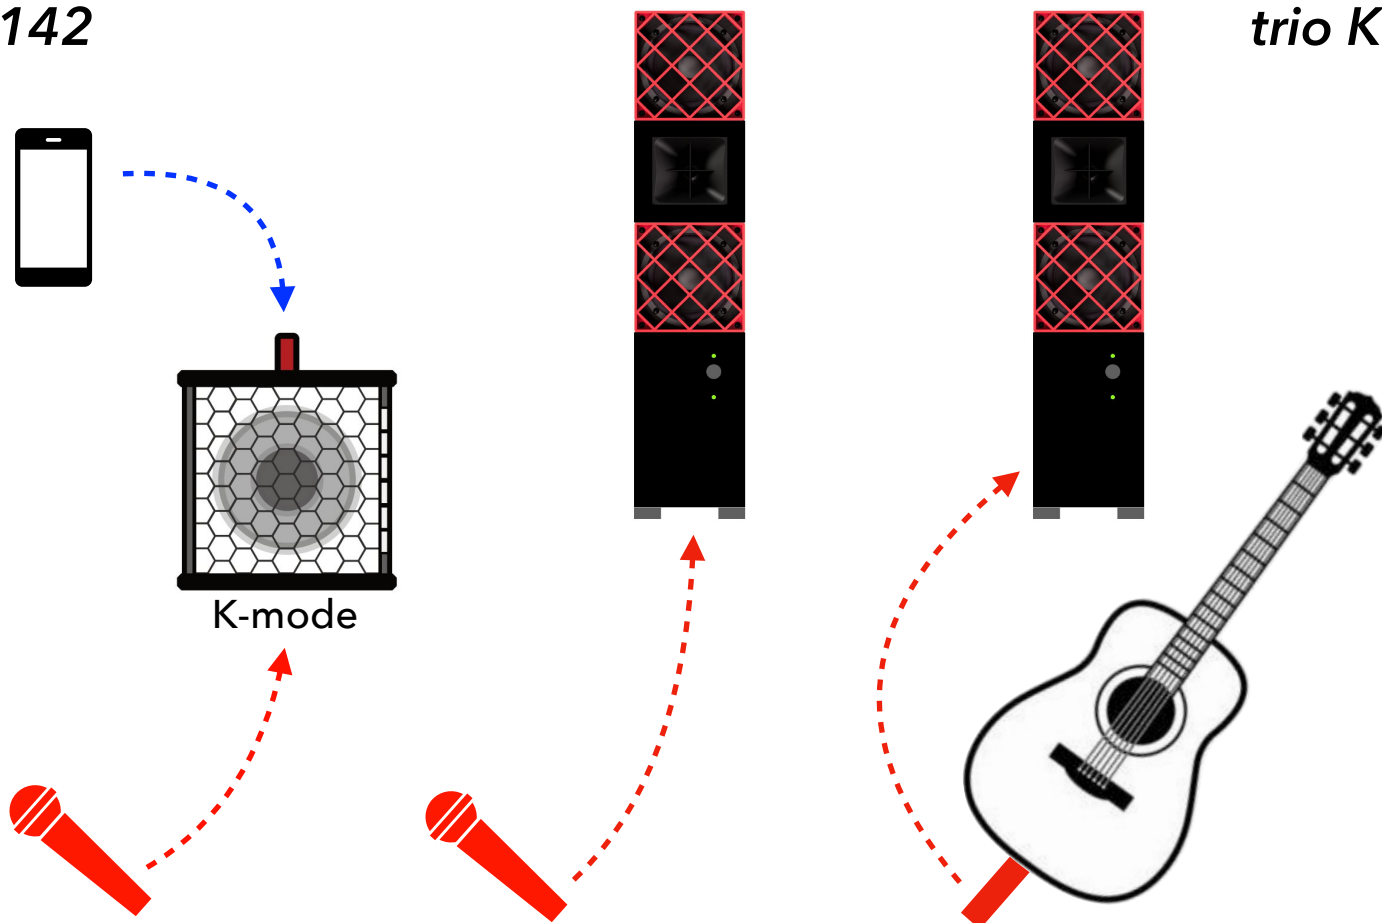


143

Club K I

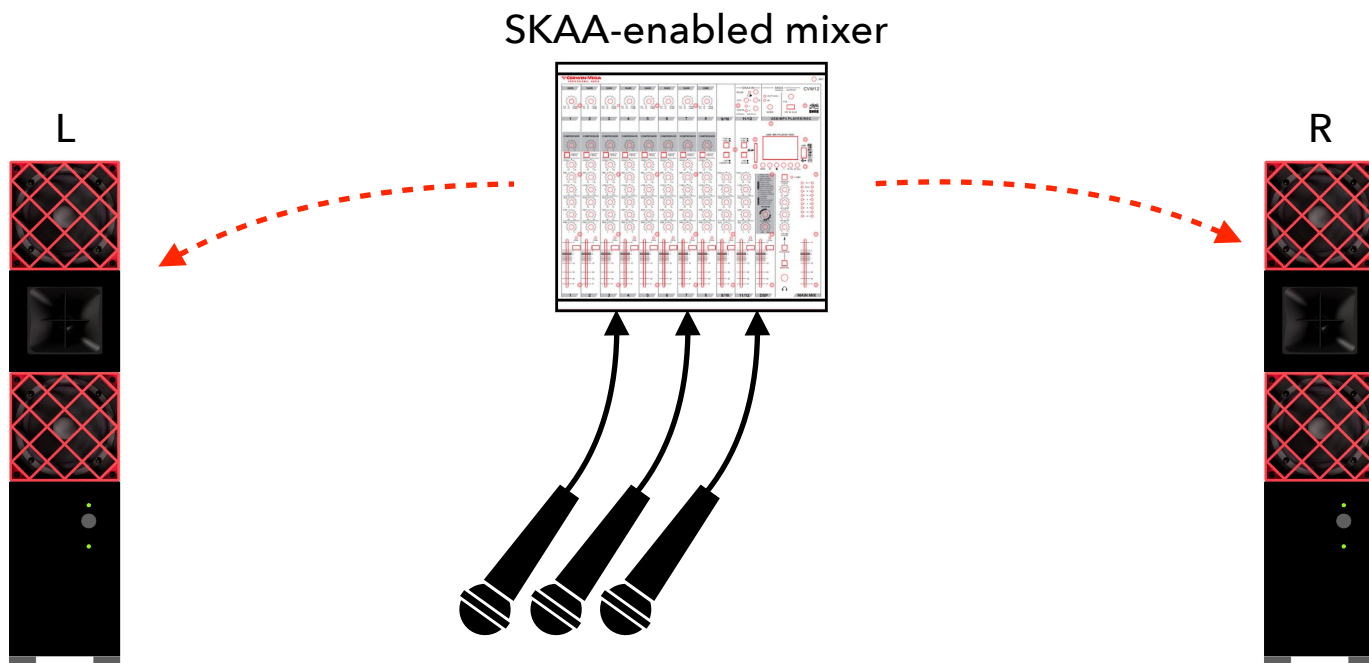


144

Club K II

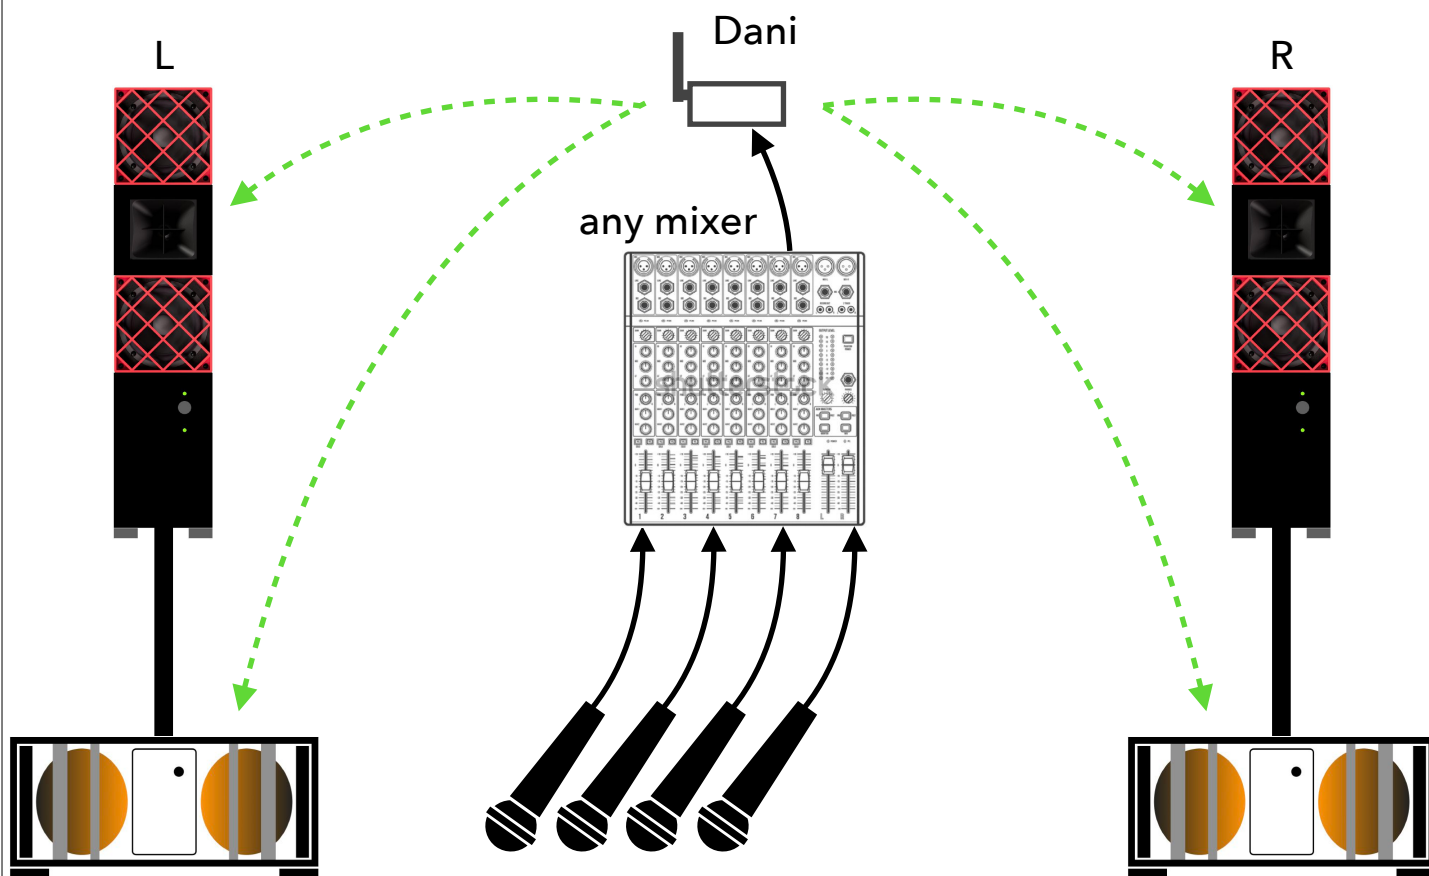


145

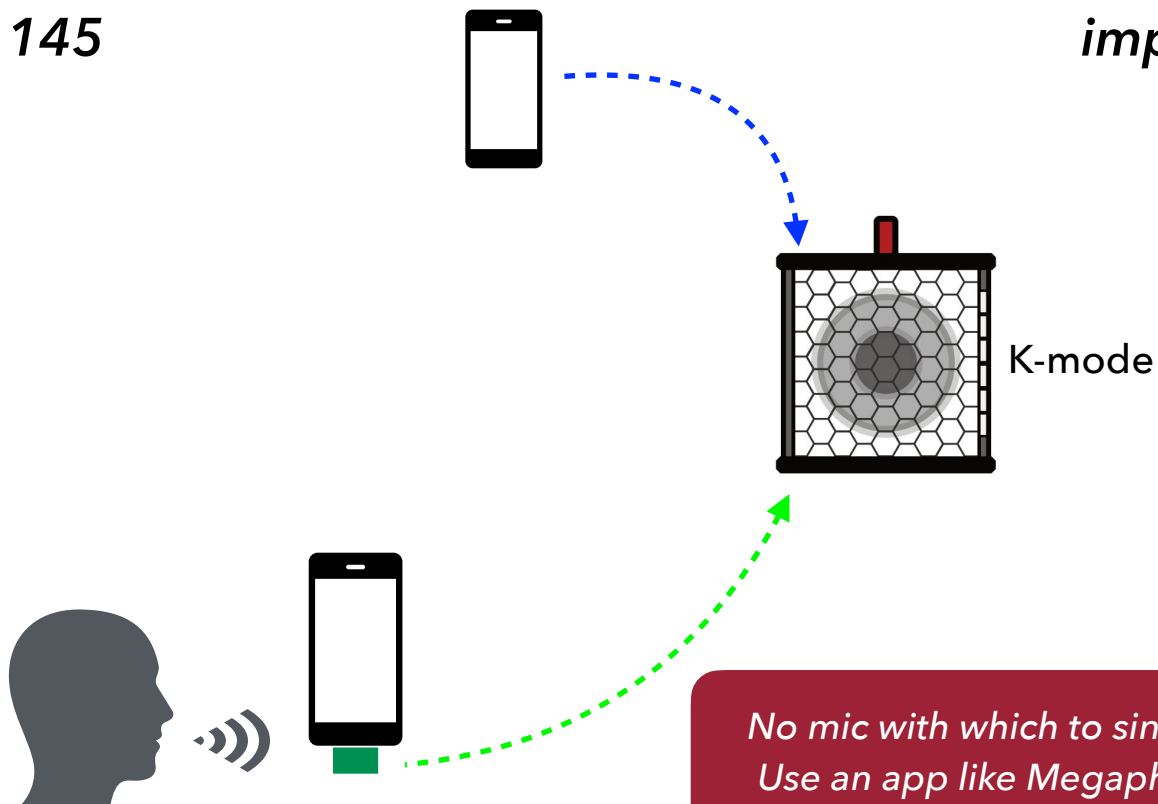improv K mic


*No mic with which to sing Karaoke?
Use an app like Megaphone and a
SKAA Transmitter (like Cassandra or Diz)
to turn your mobile phone into a mic.*

146

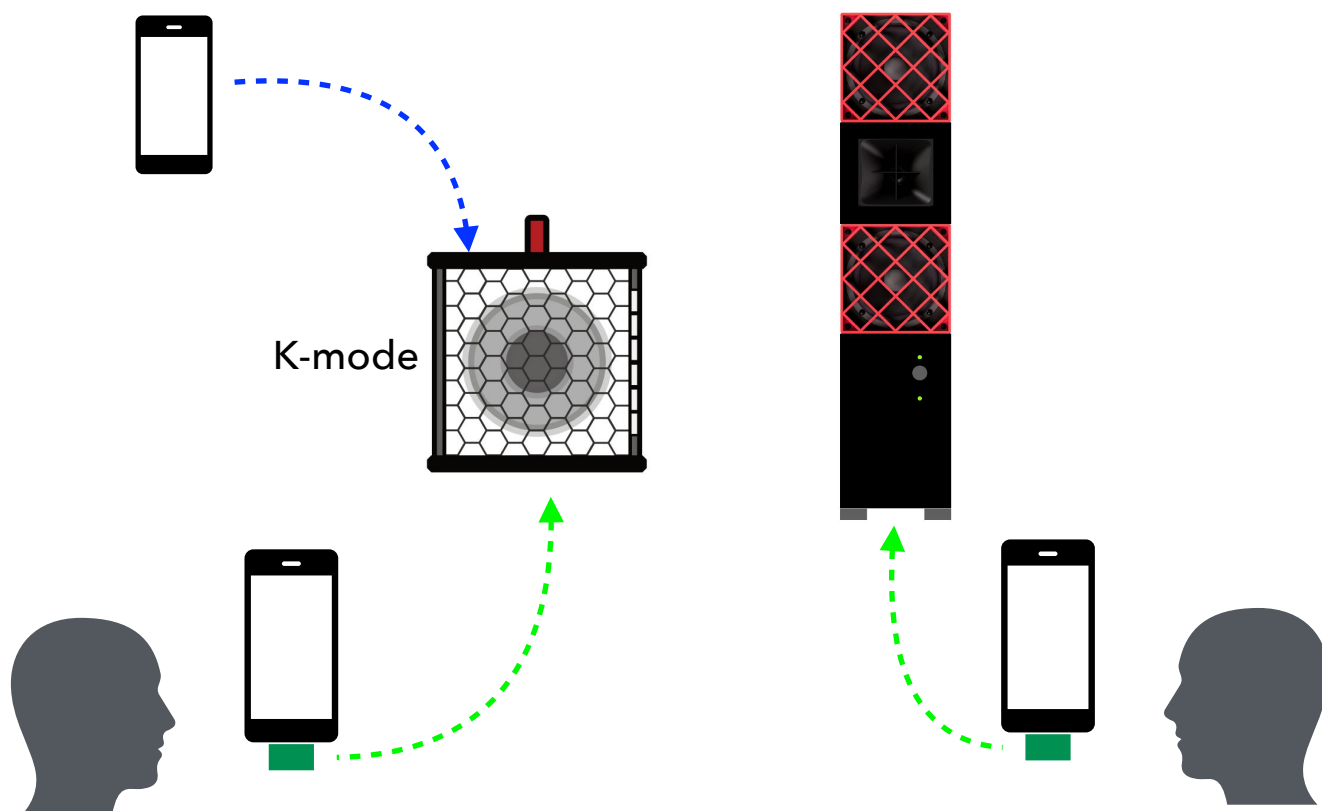improve K mic duet


147

improve K mic II

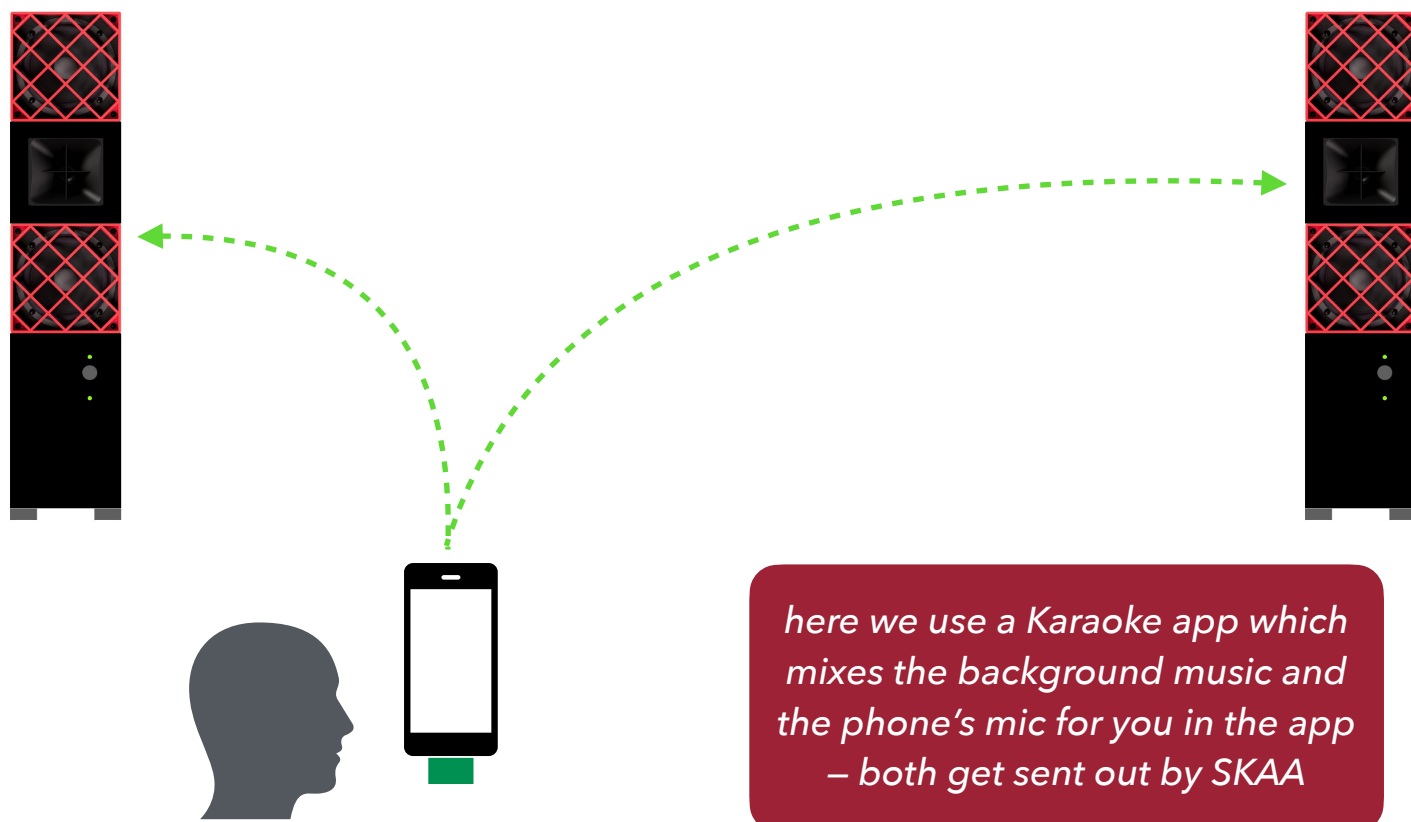


148

improve K mic duet II

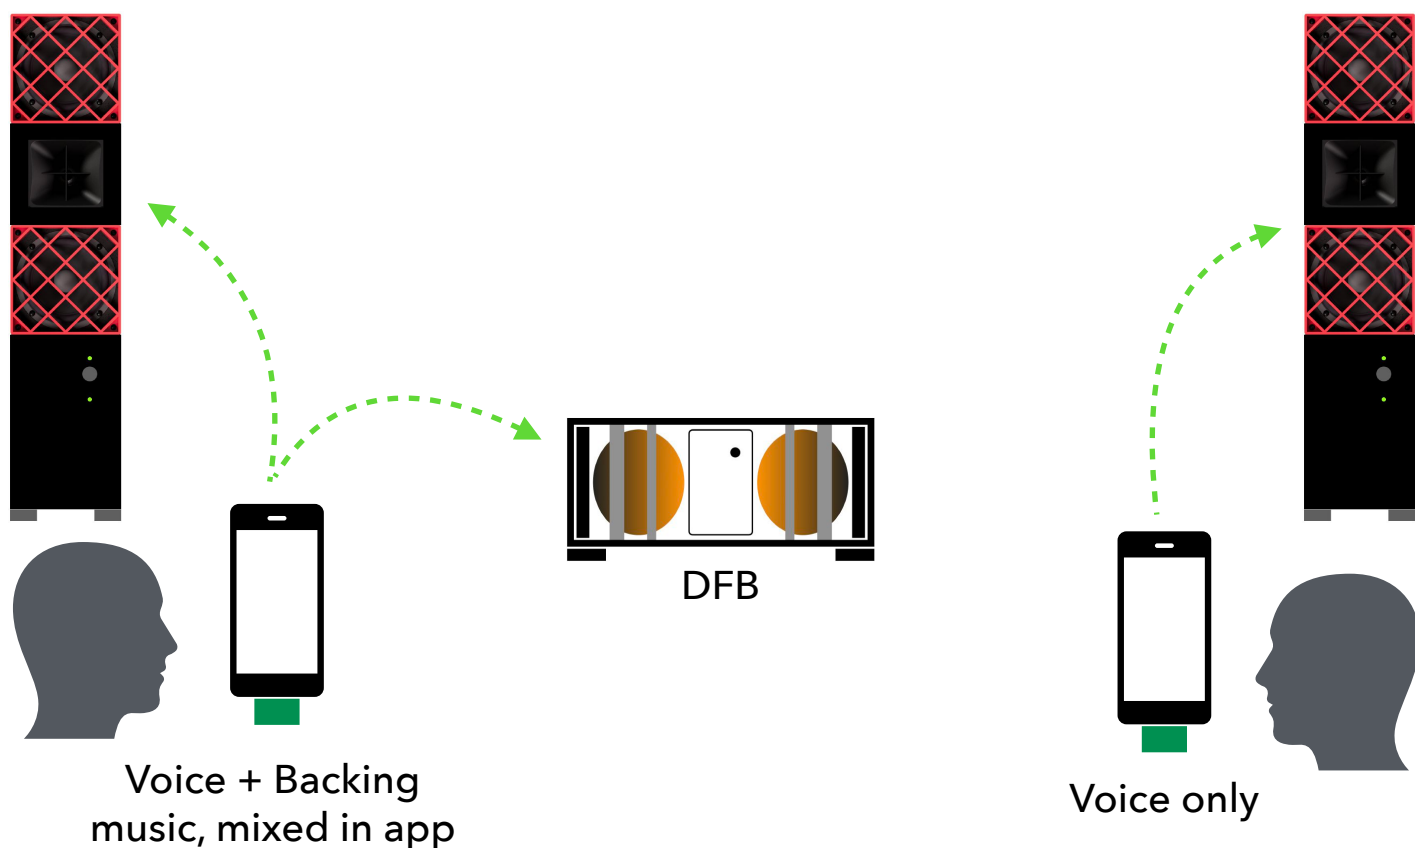

149

Check

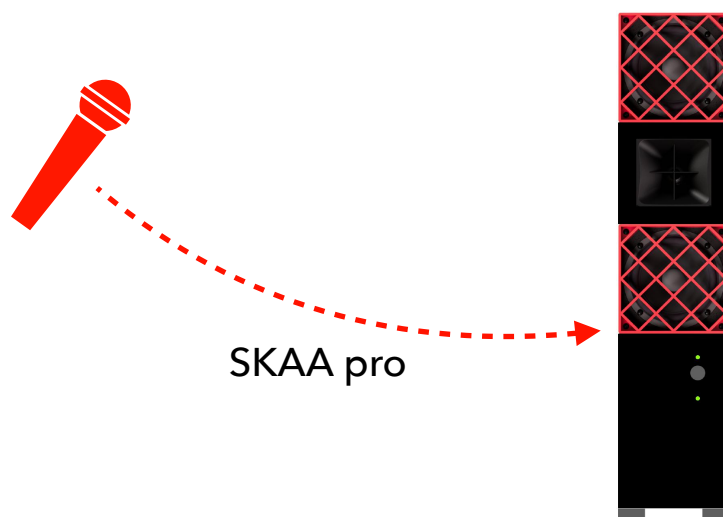


SKAA pro

these are easy hookups for making a corporate speech, hawking at a trade show, or making announcements at a soccer game – come get your orange slices ...

150


Check 1,2

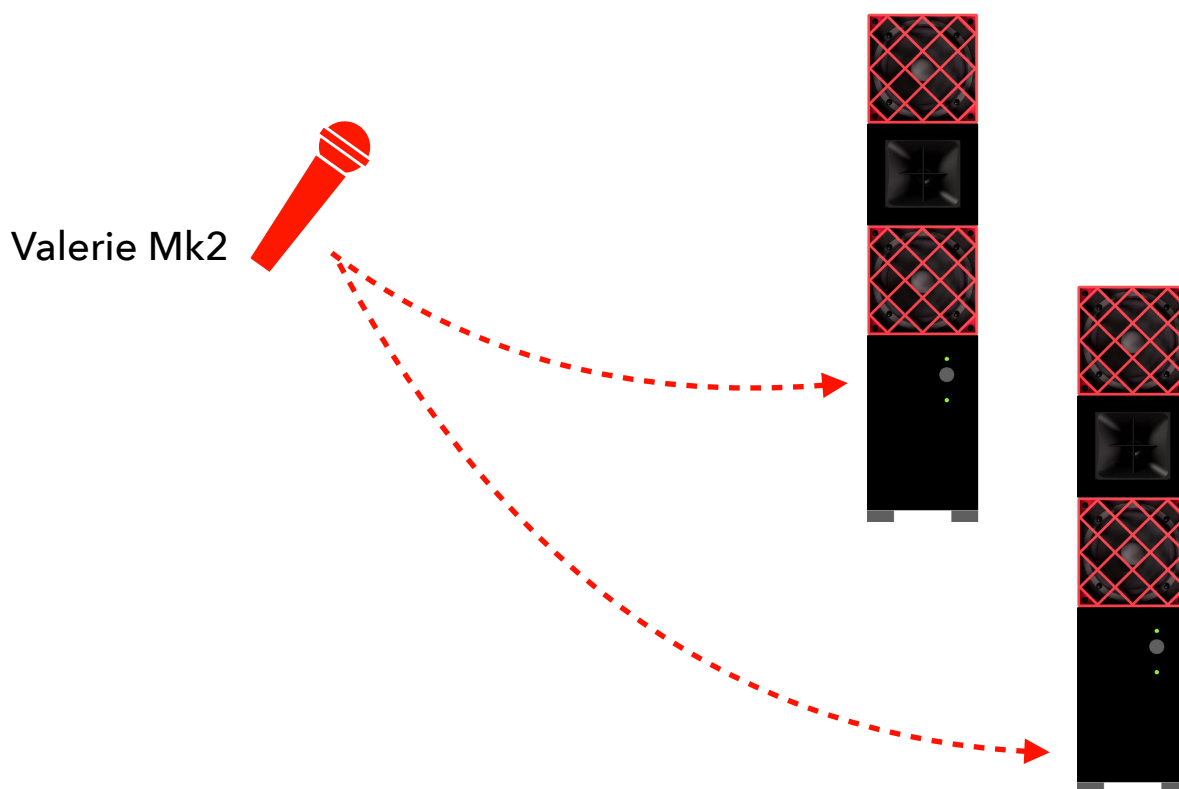

Valerie Mk2


151

Check 1,2,3

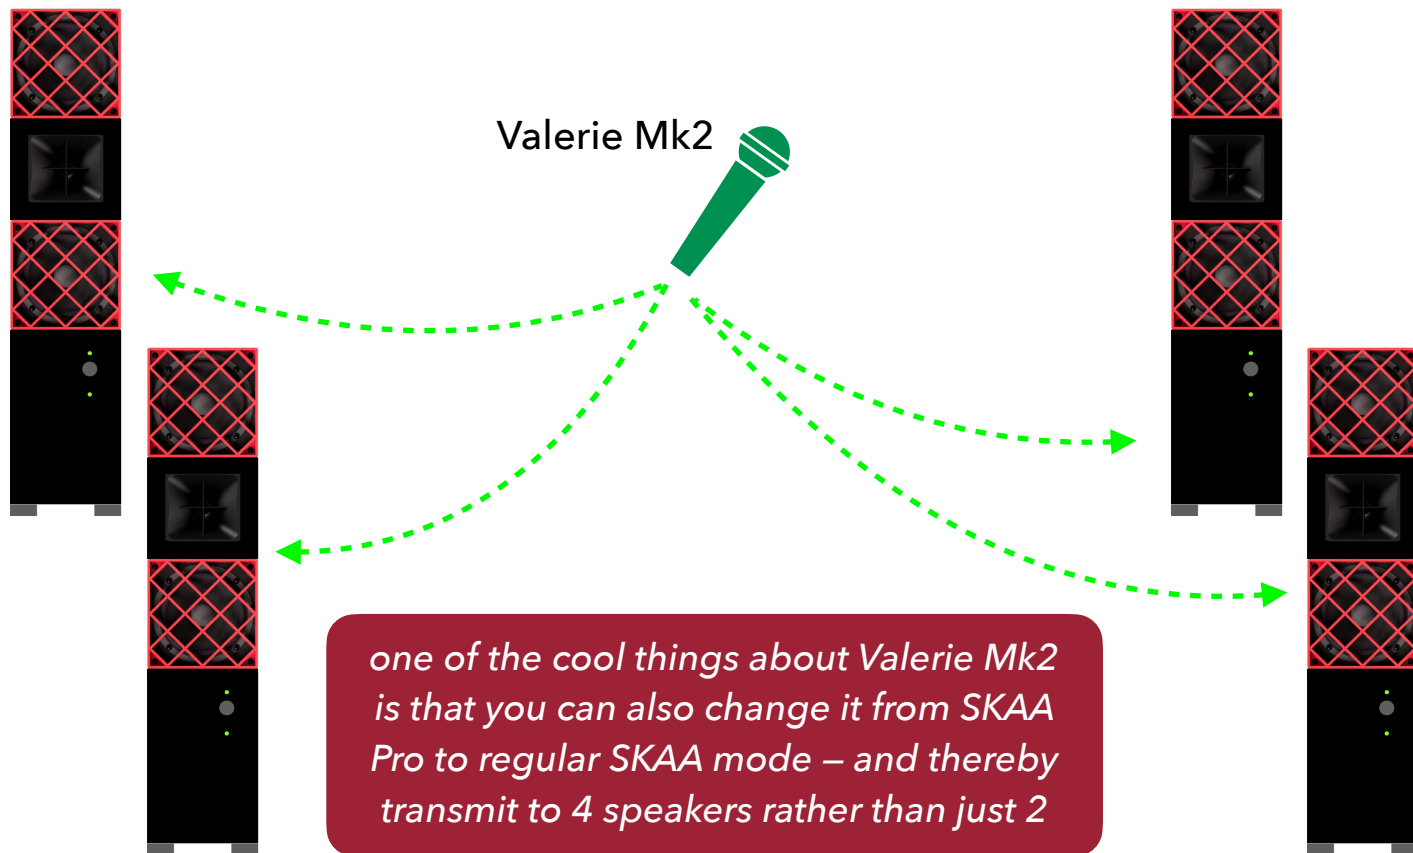

152


fake it

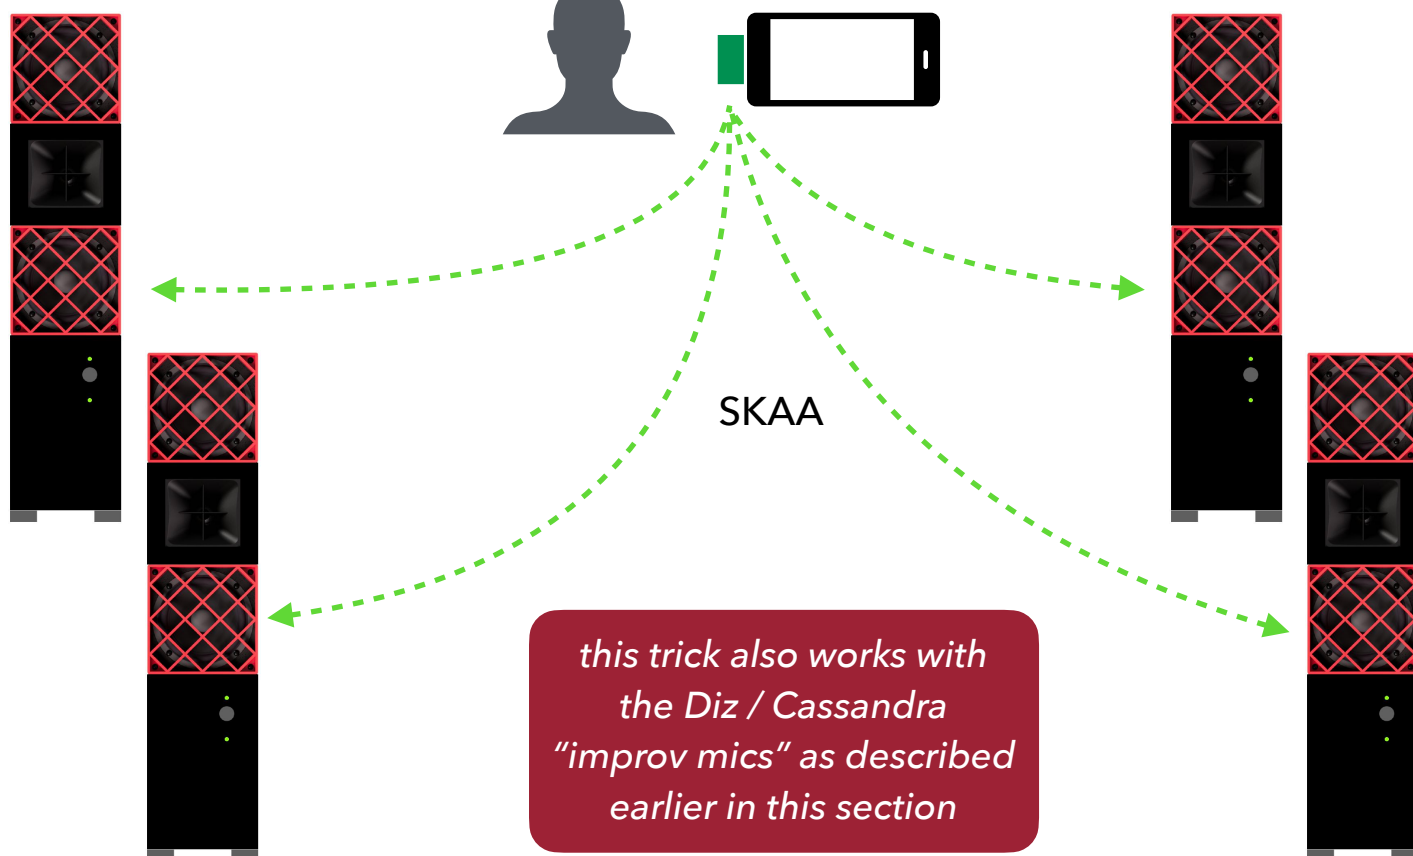

Instruments & Jams


153

direct from instrument

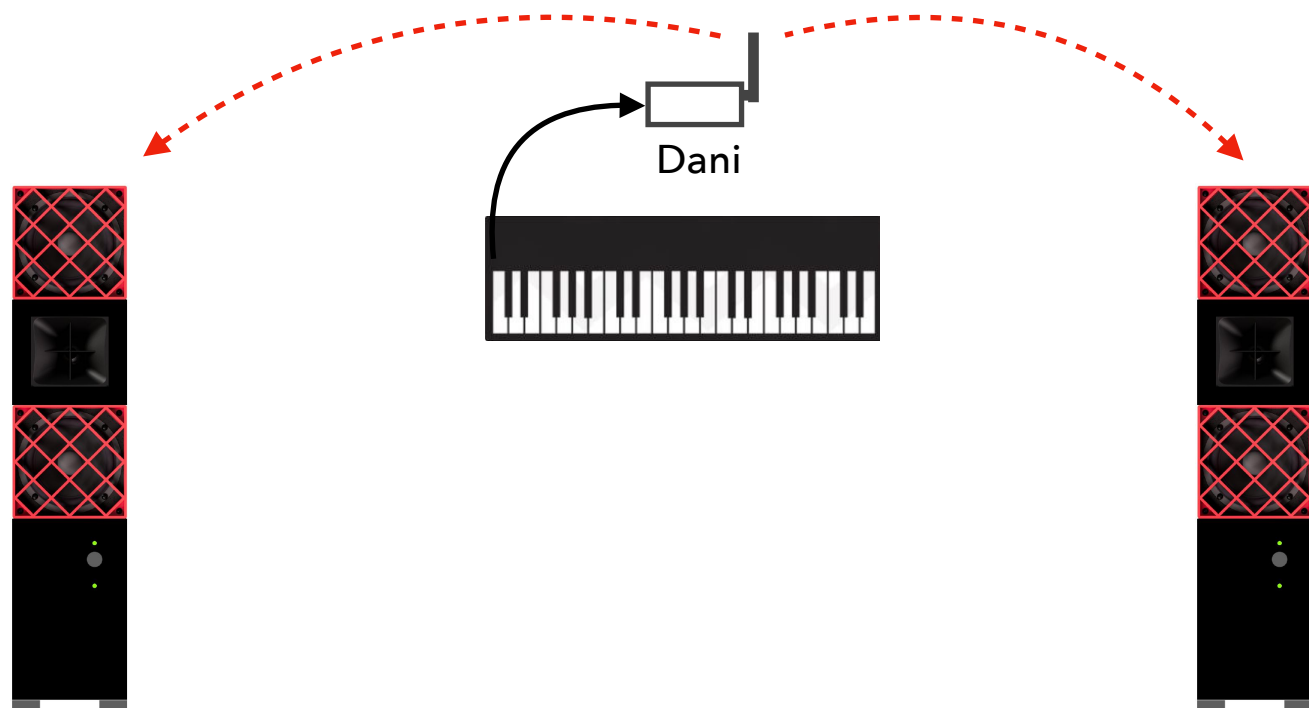


154

direct from instrument II

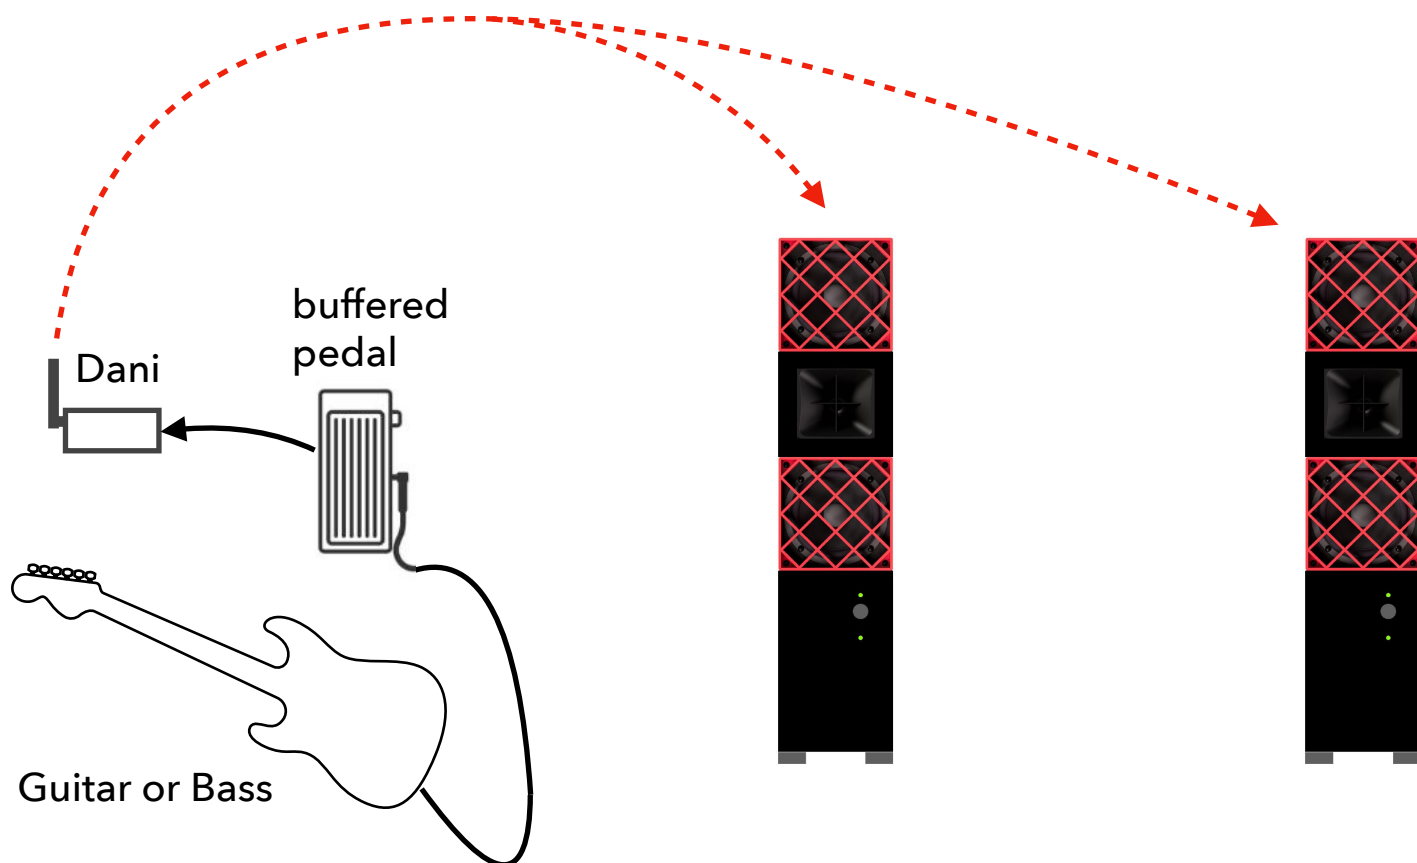


155

direct from pedalboard

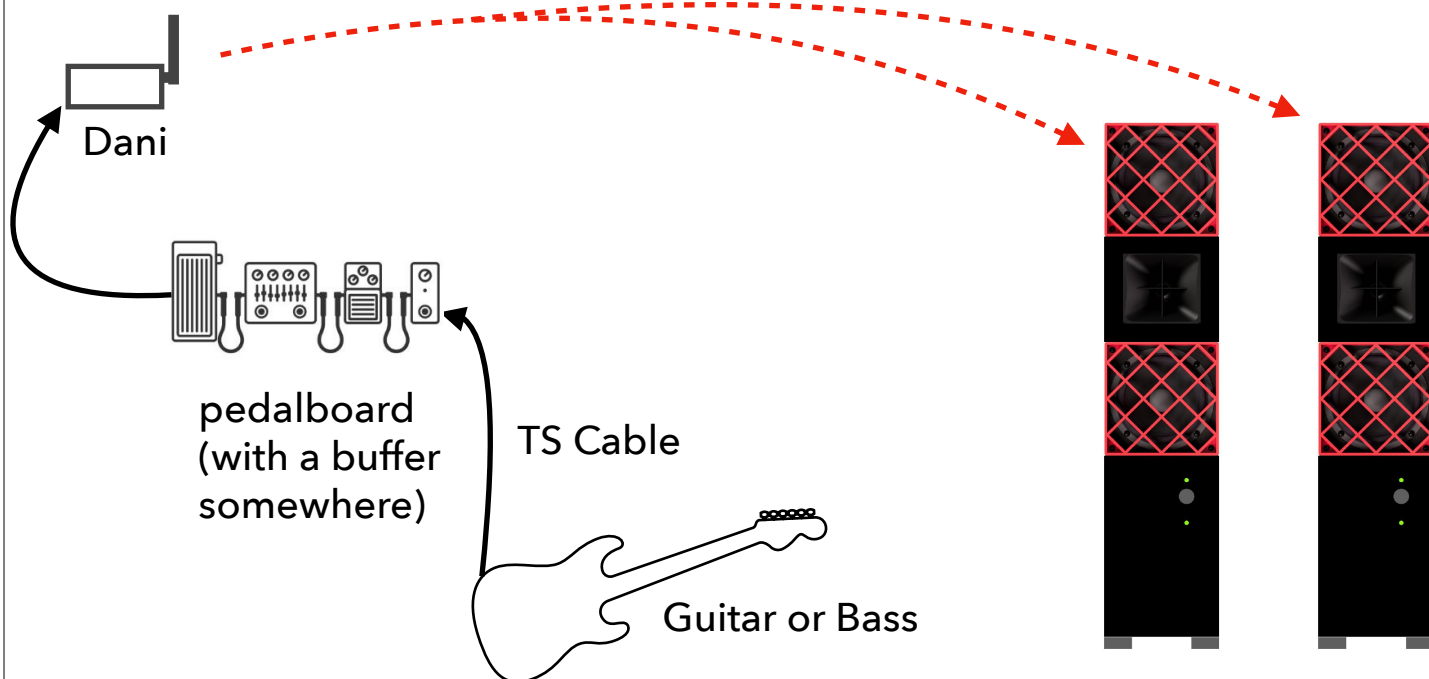


156

let's monitor in-ear

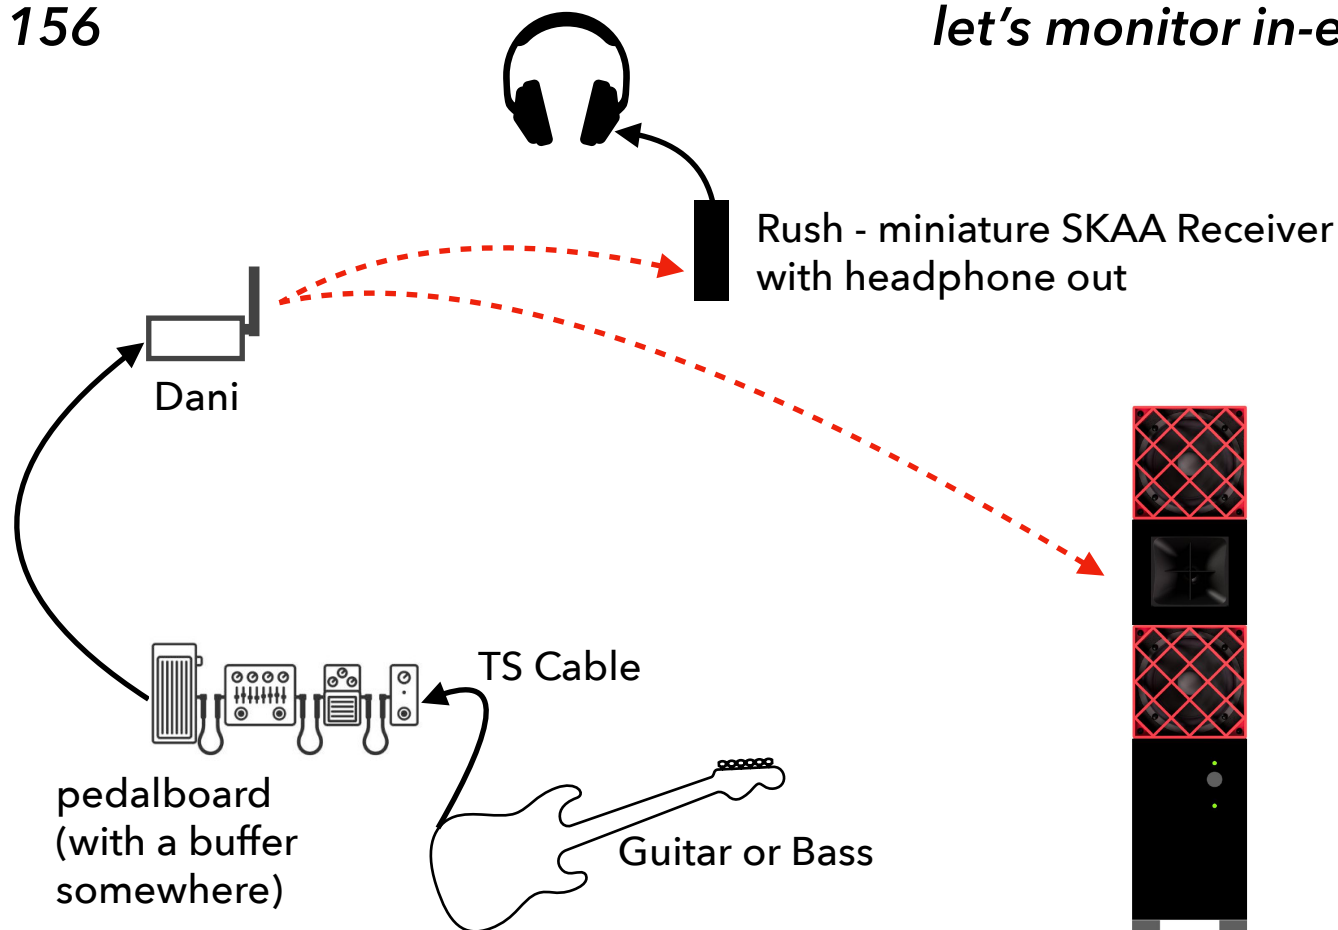


157

coffee shop special

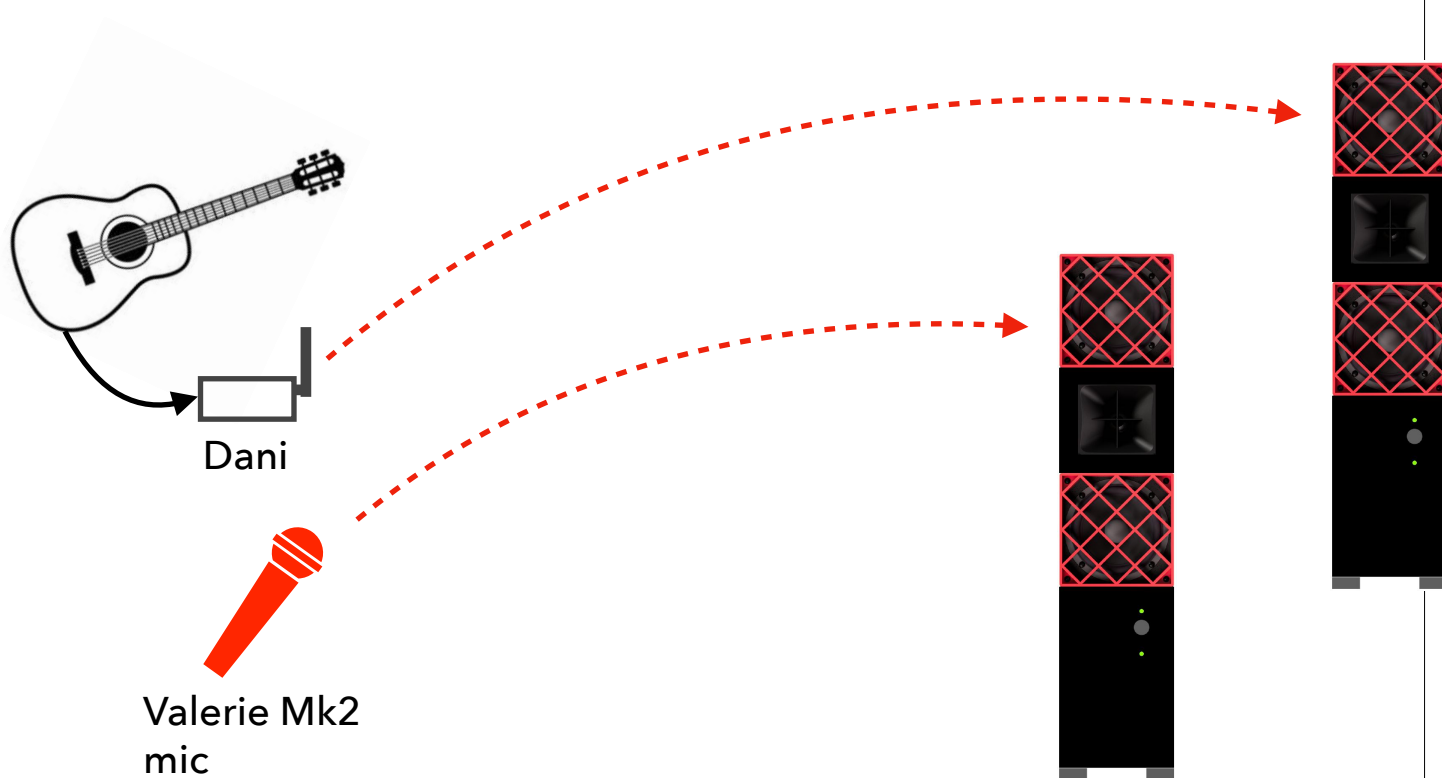


158

wireless drum pad

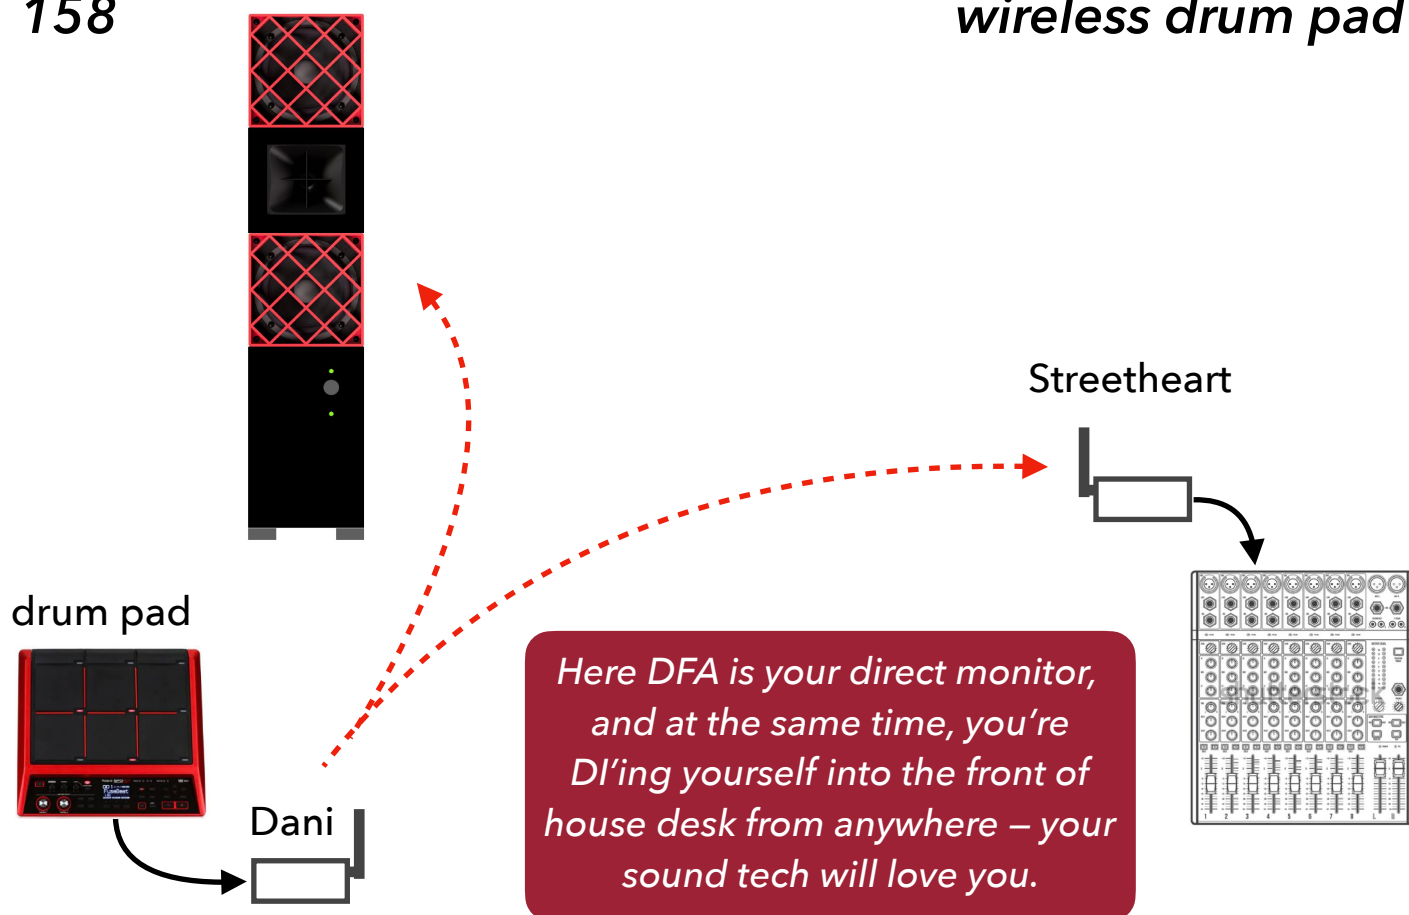


159

2-person jam

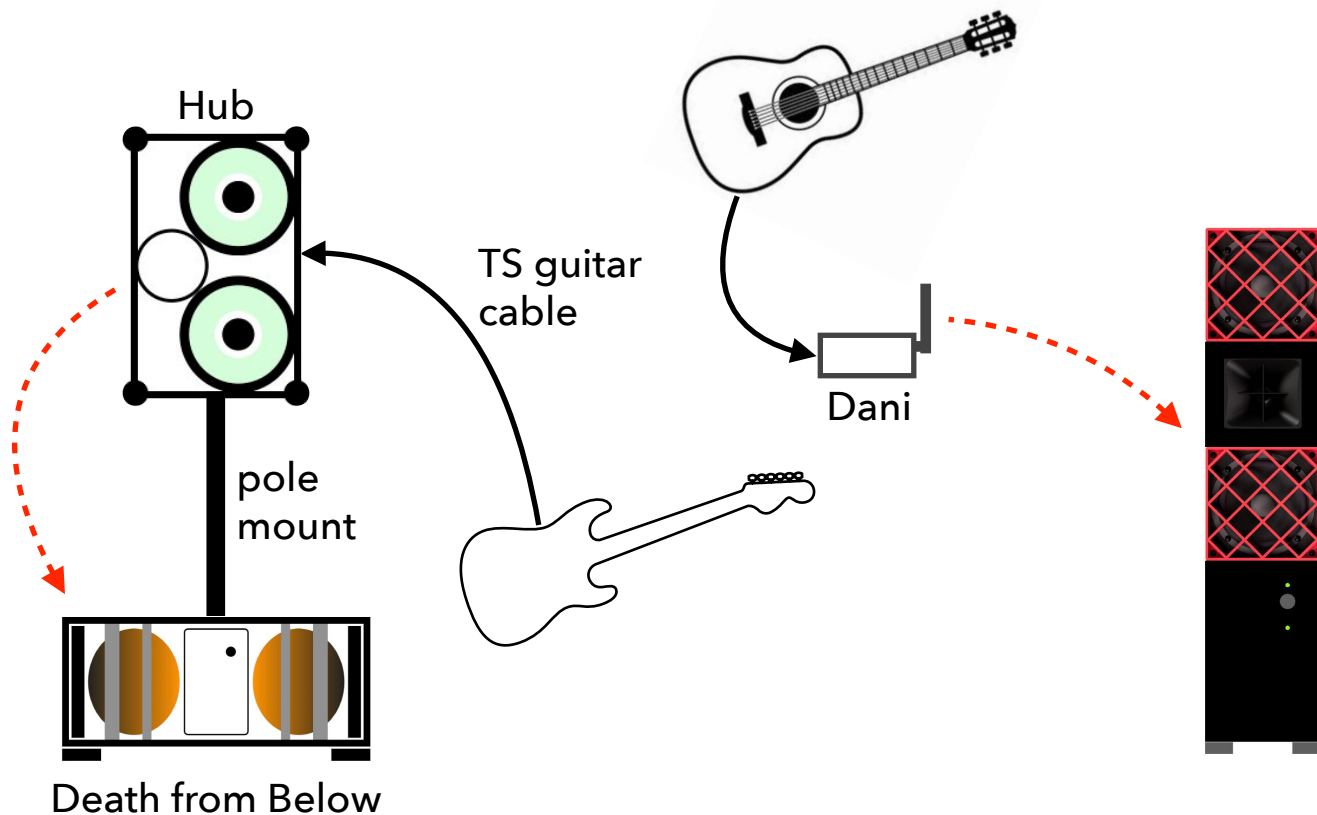


160

3-person + backing track

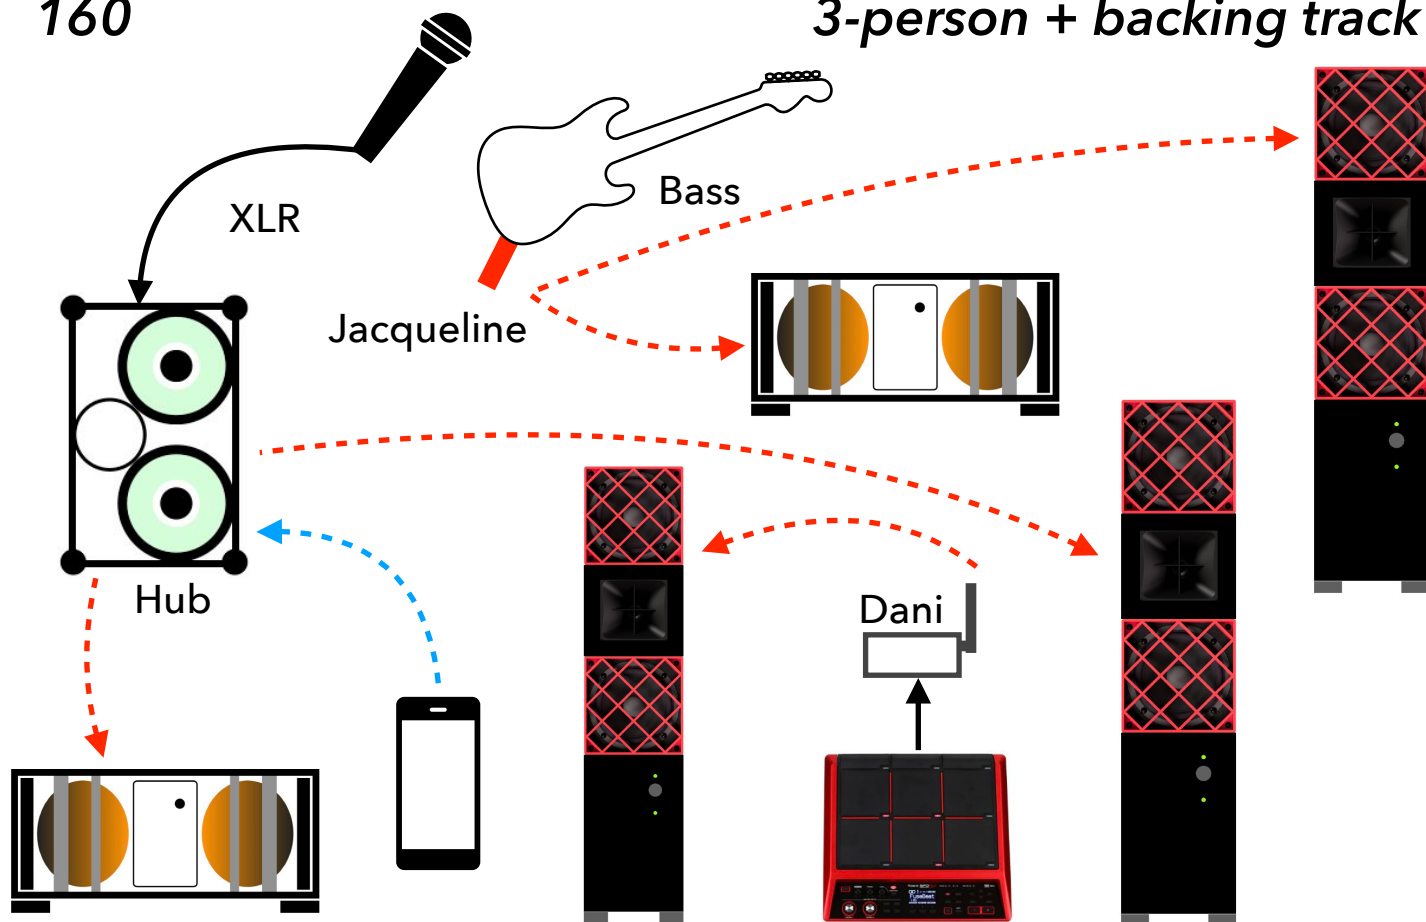

161


the AI

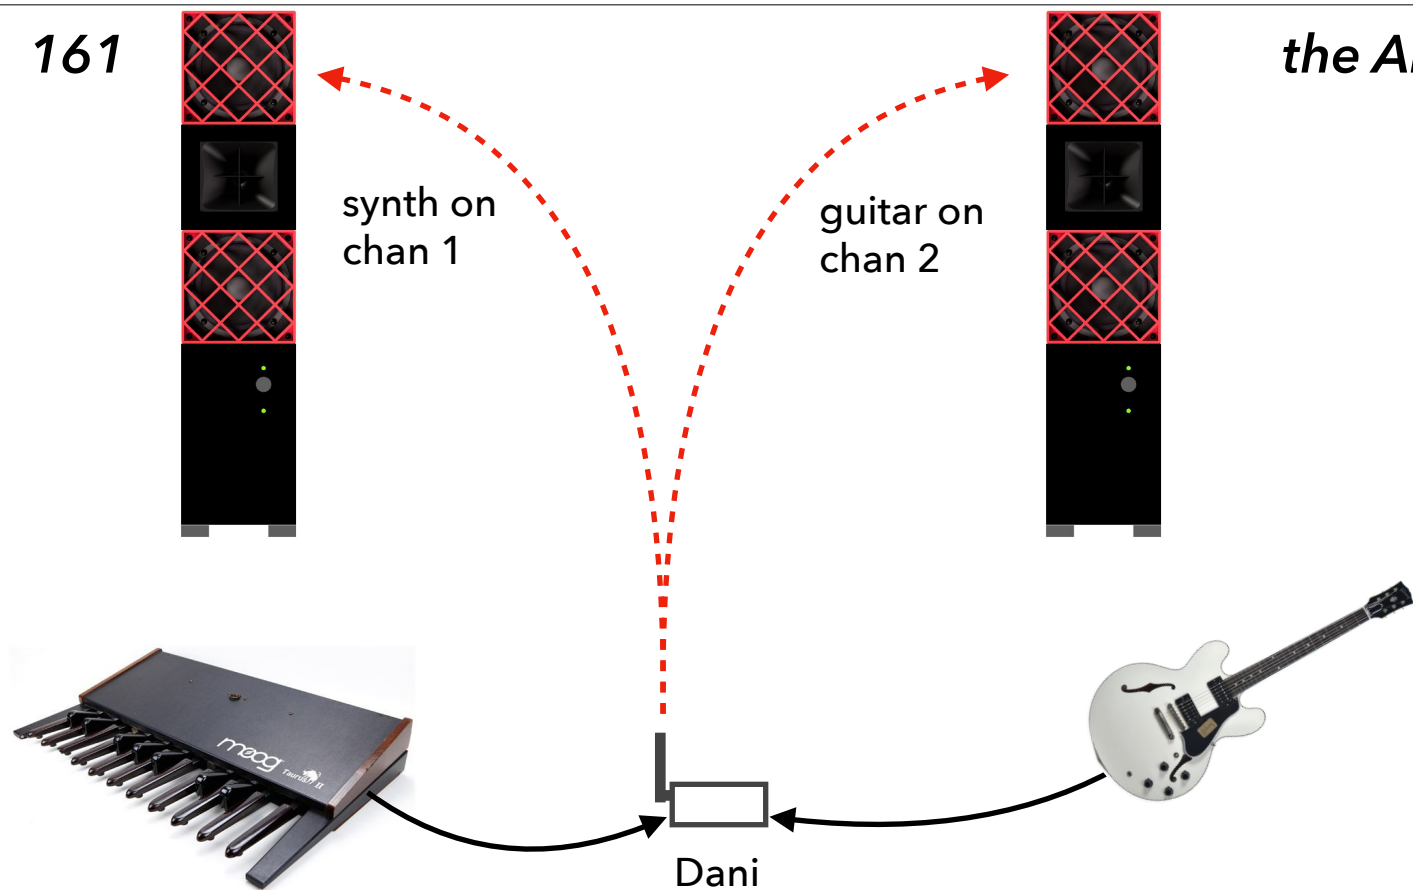

pedalboards not shown ...


162

the AI & Ged

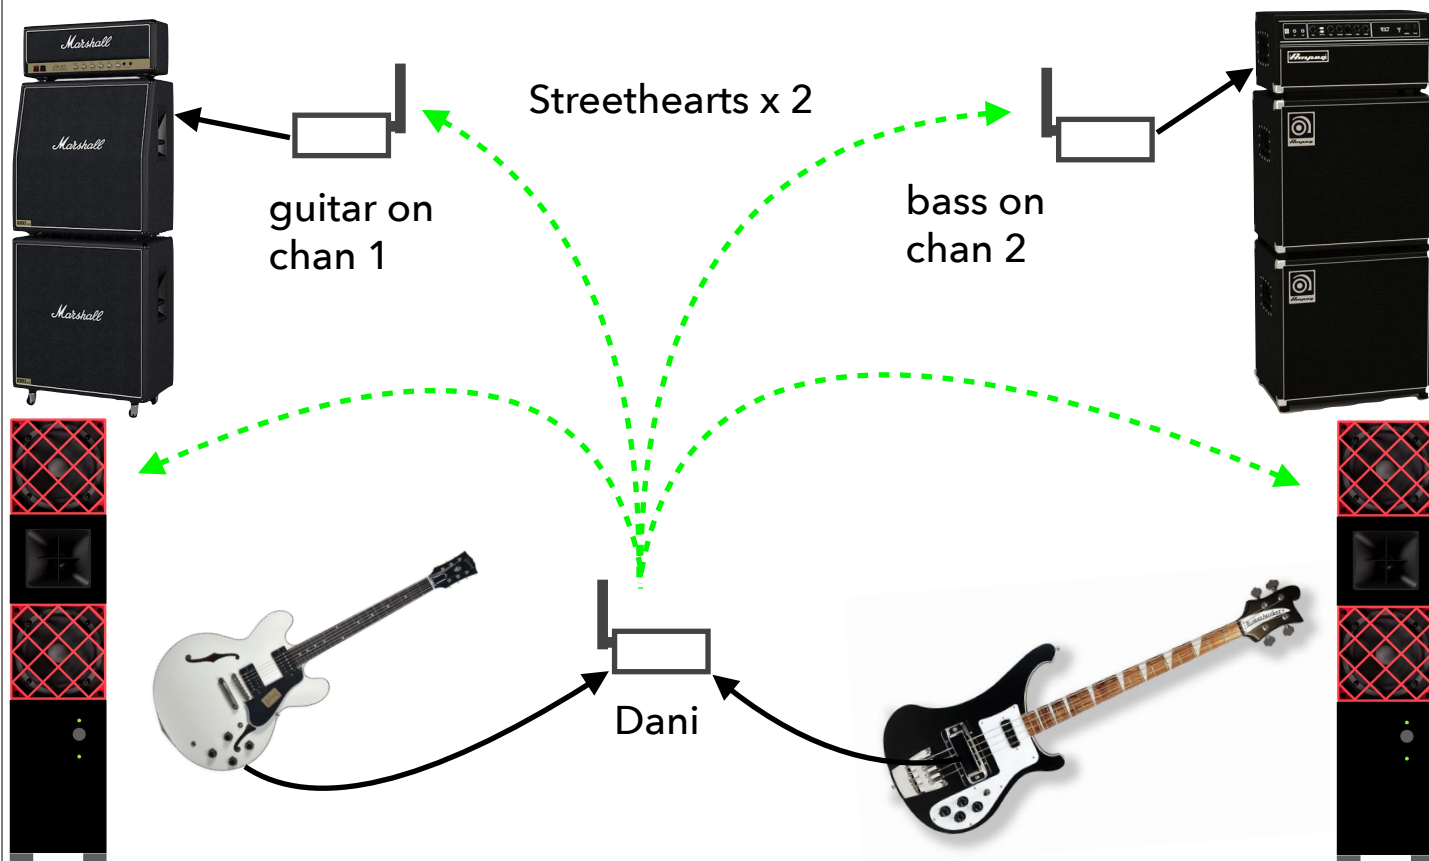


163

don't need no stinkin' monitor tech

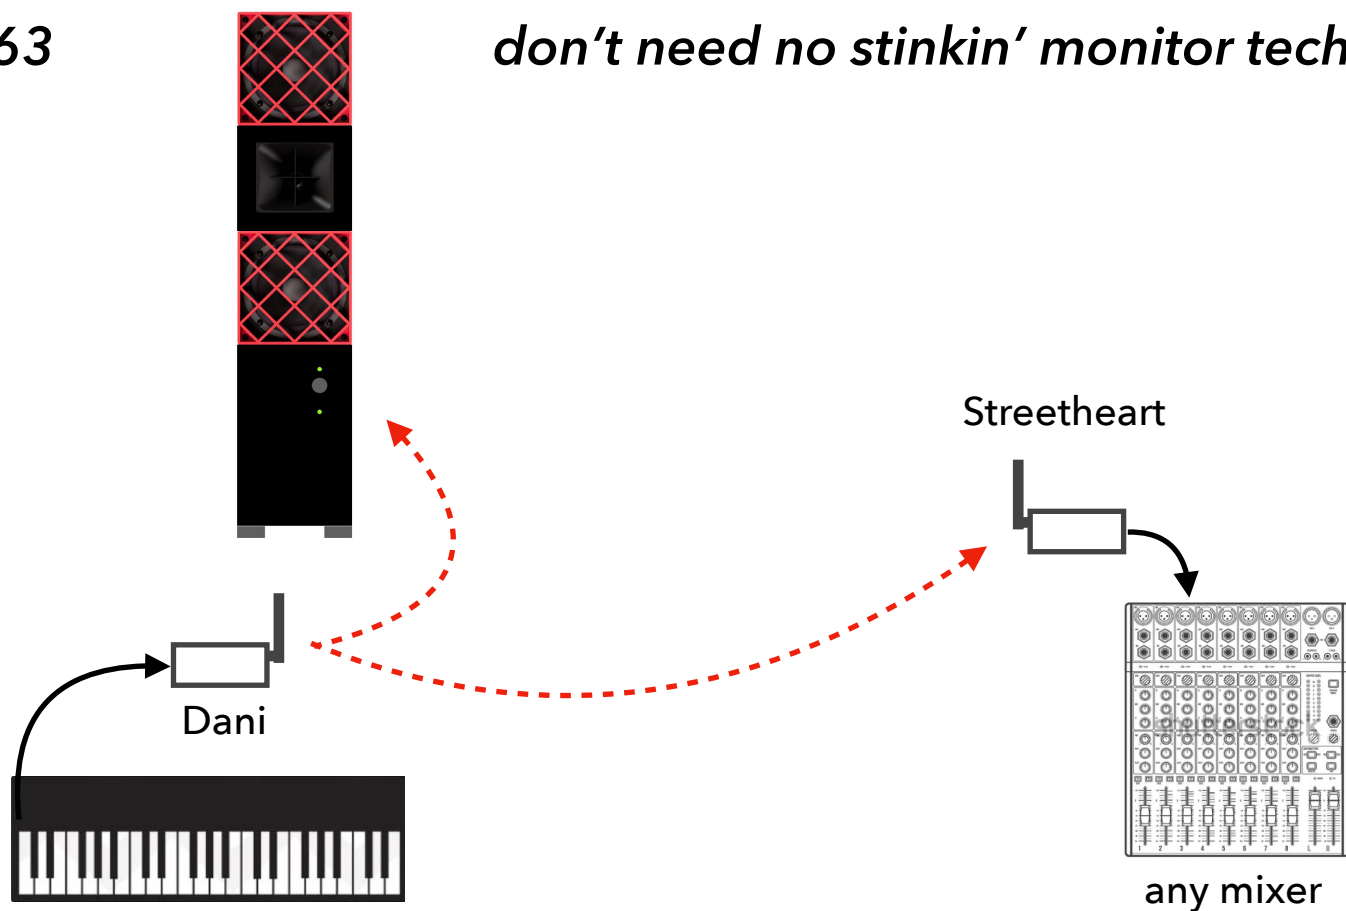


164

this gig pays in "exposure"

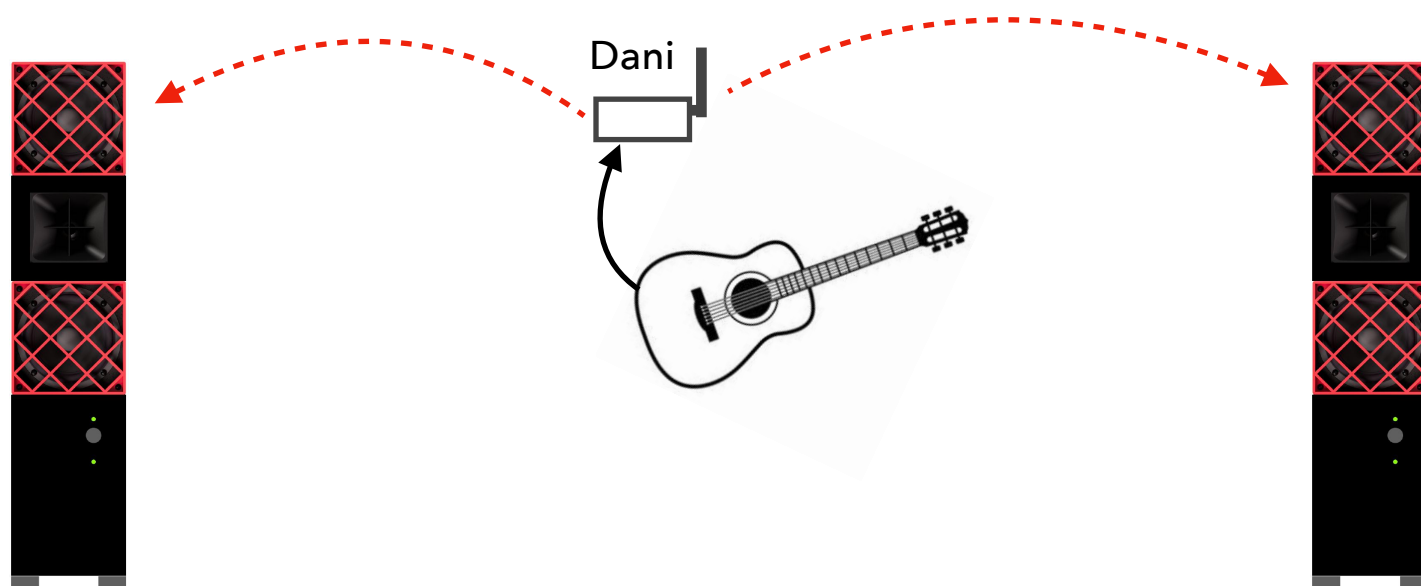


165

everything fits in my gig bag

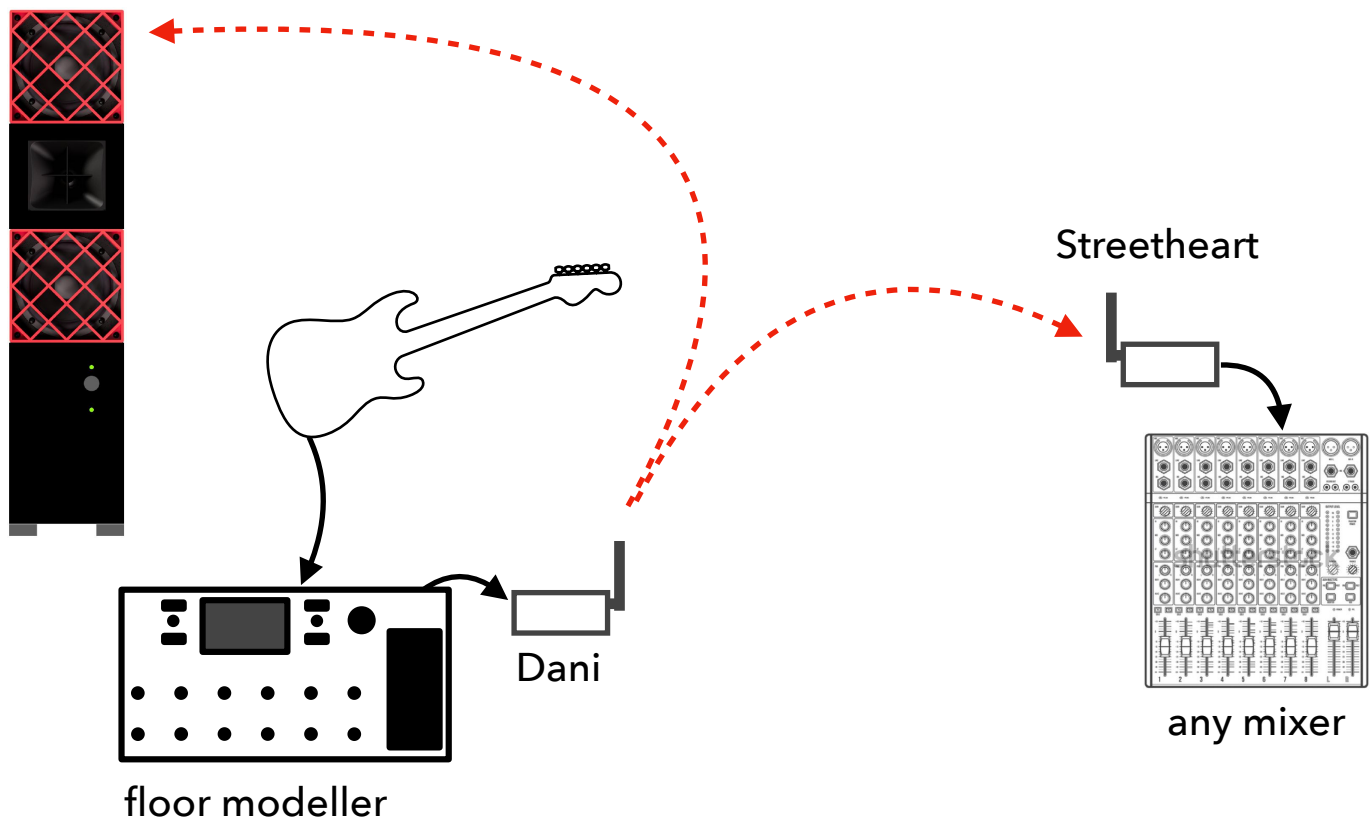


166

still just one trip to the car

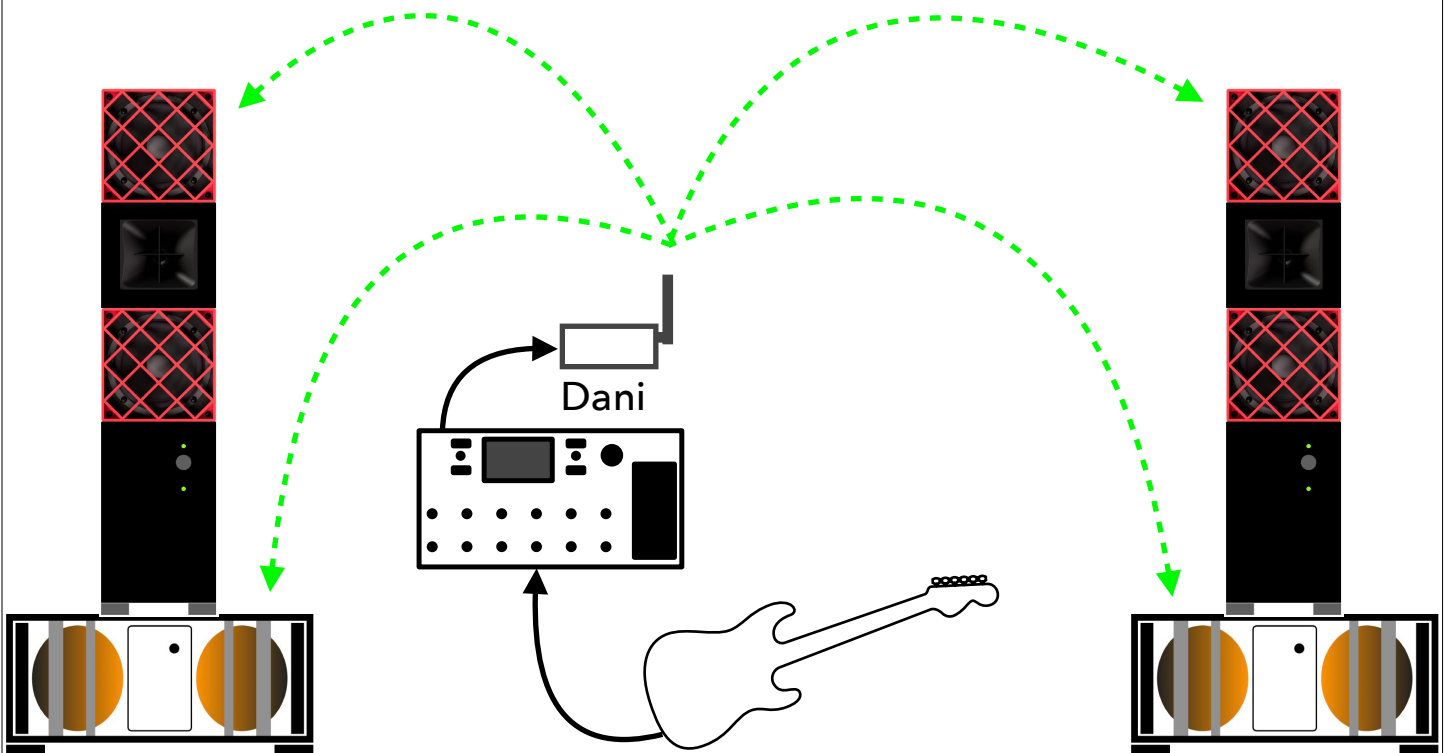


167

roll your own wedge

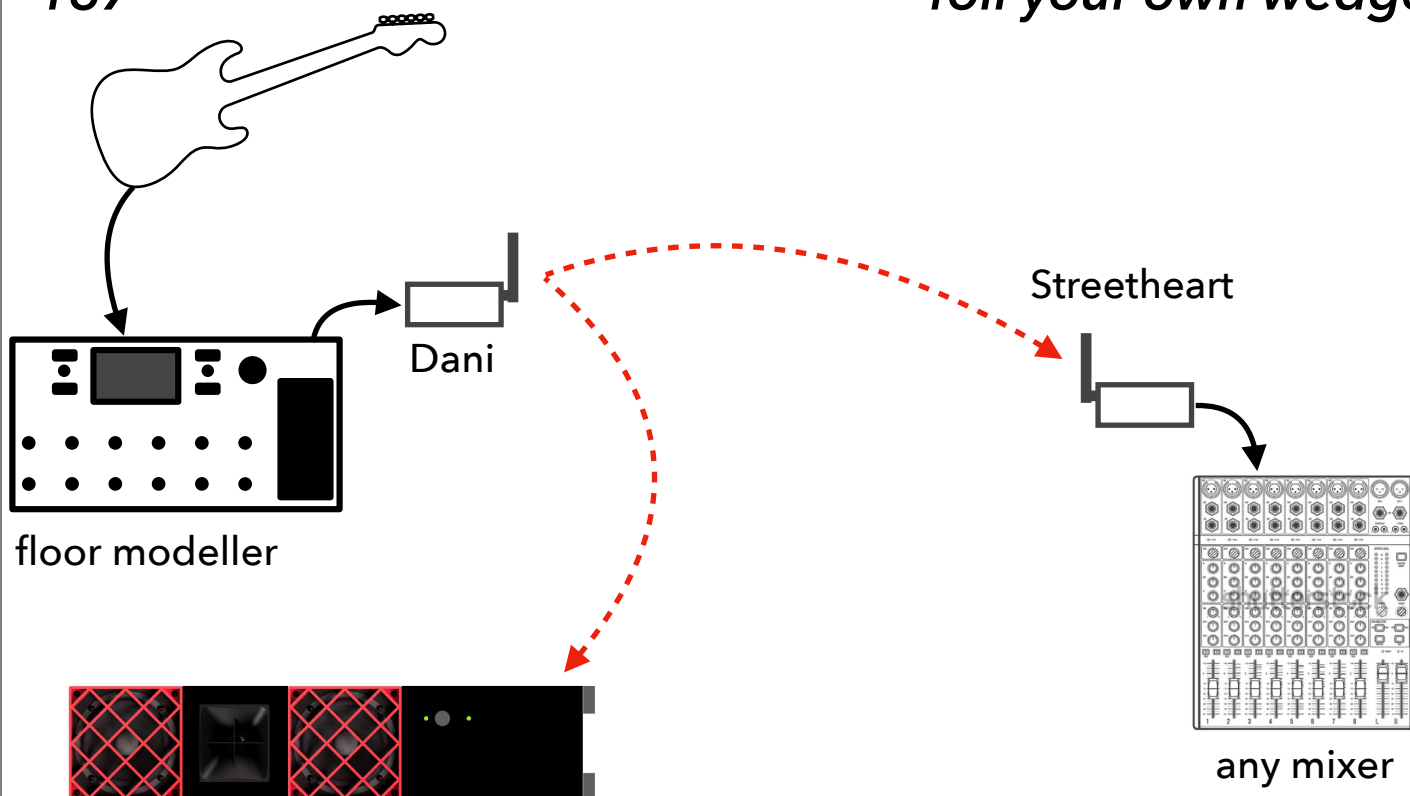


168

a wedge for me and one for the drummer

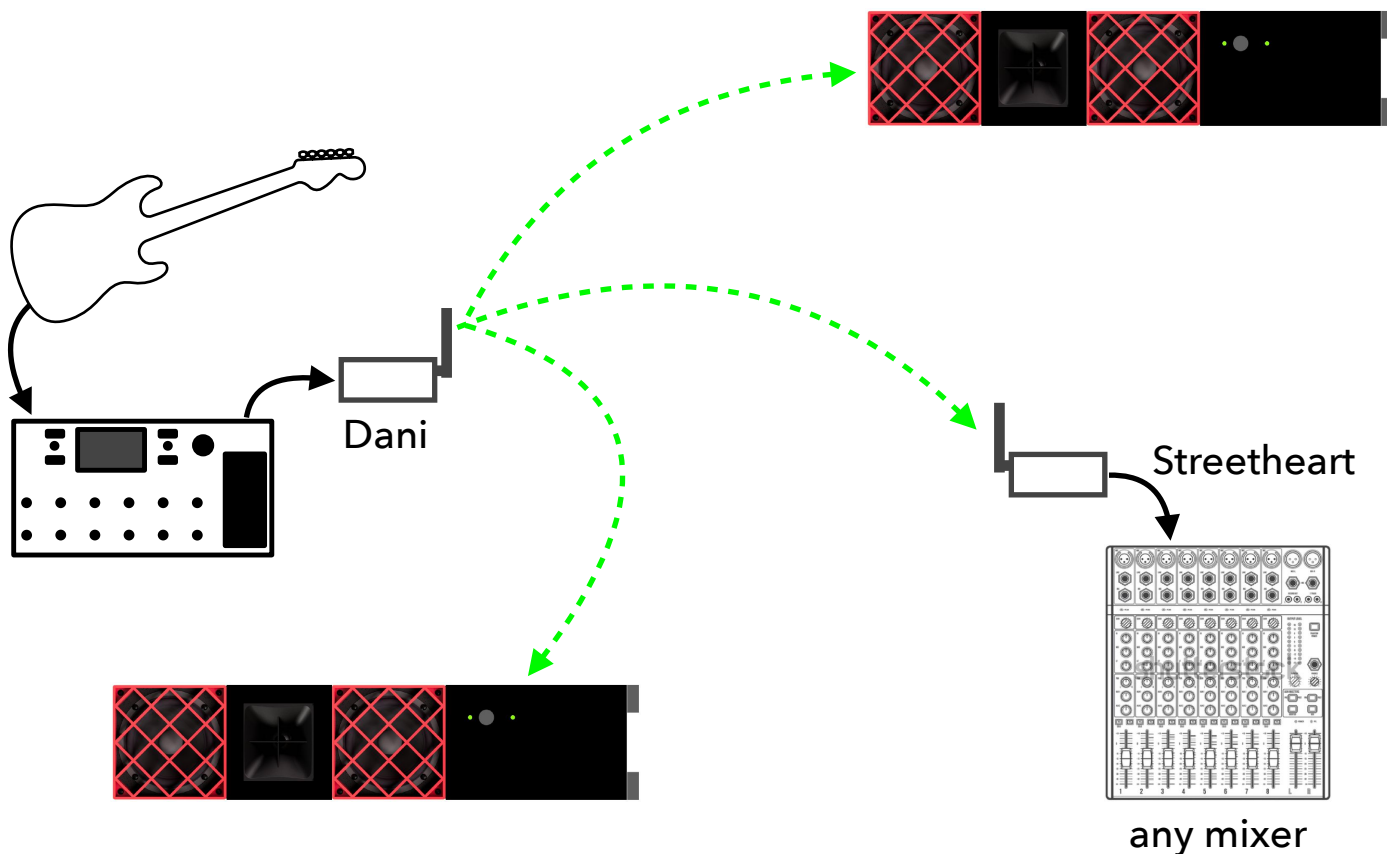


169

Texas headphones

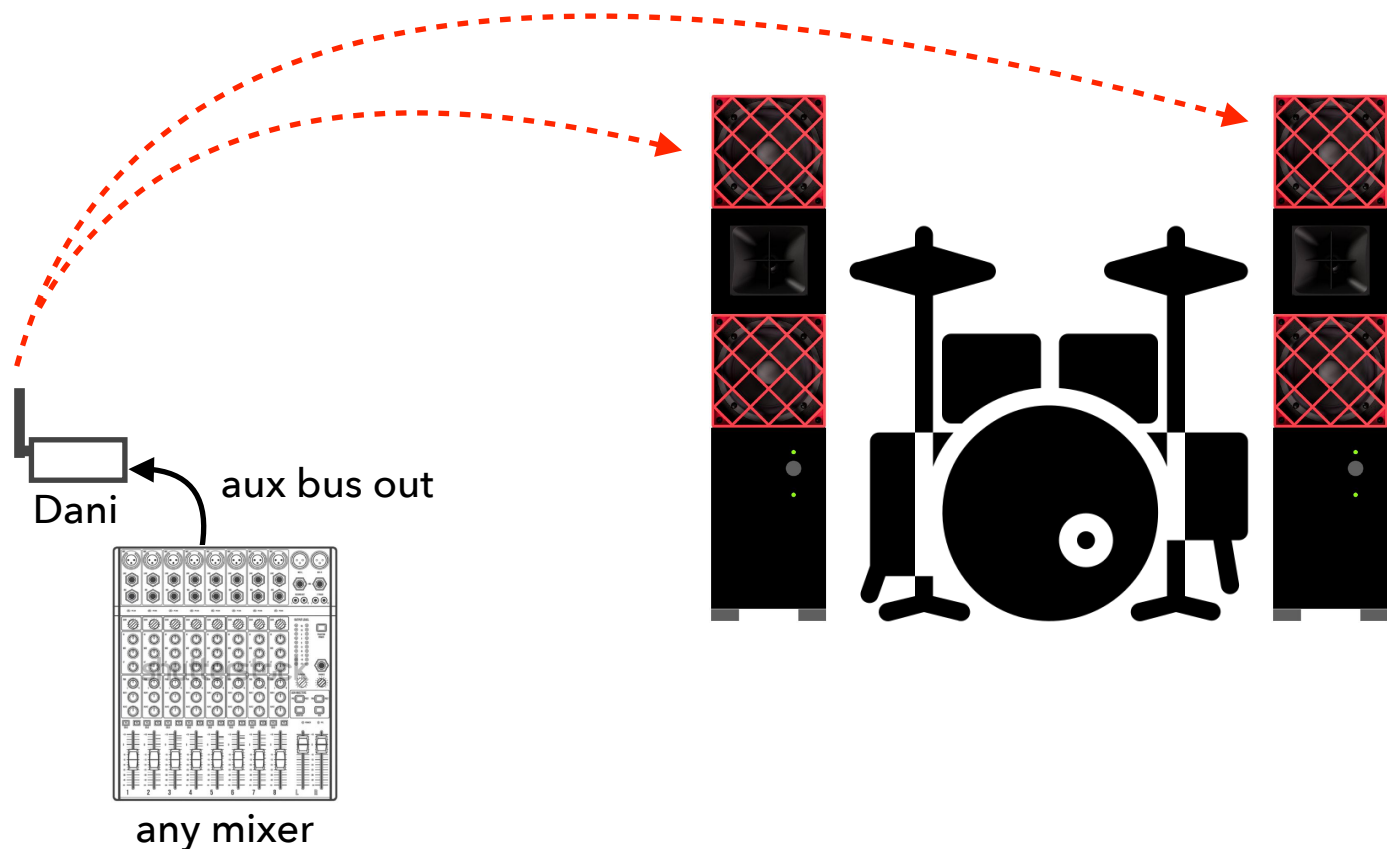


170

monitors for everyone

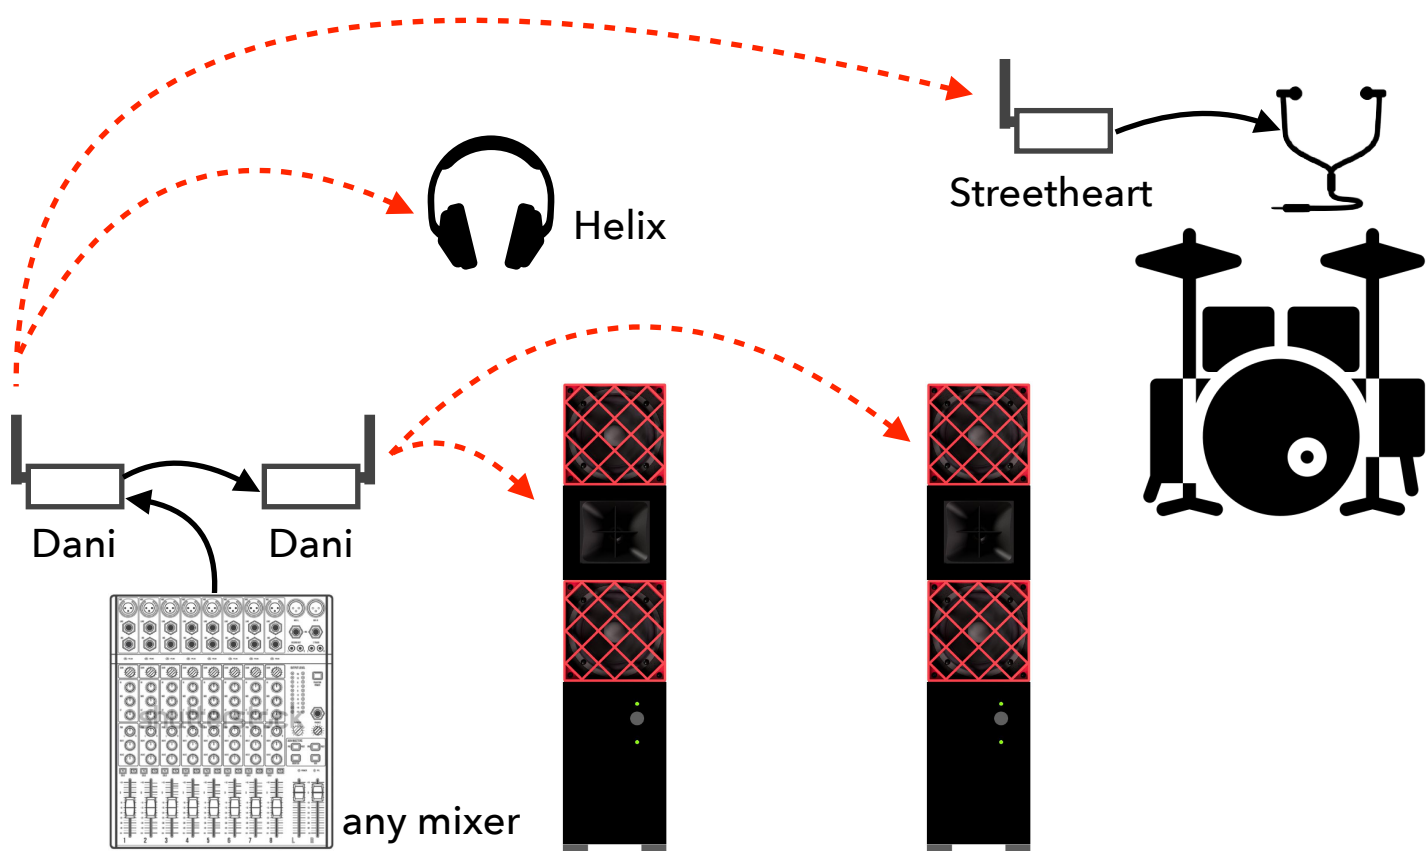

171


play live

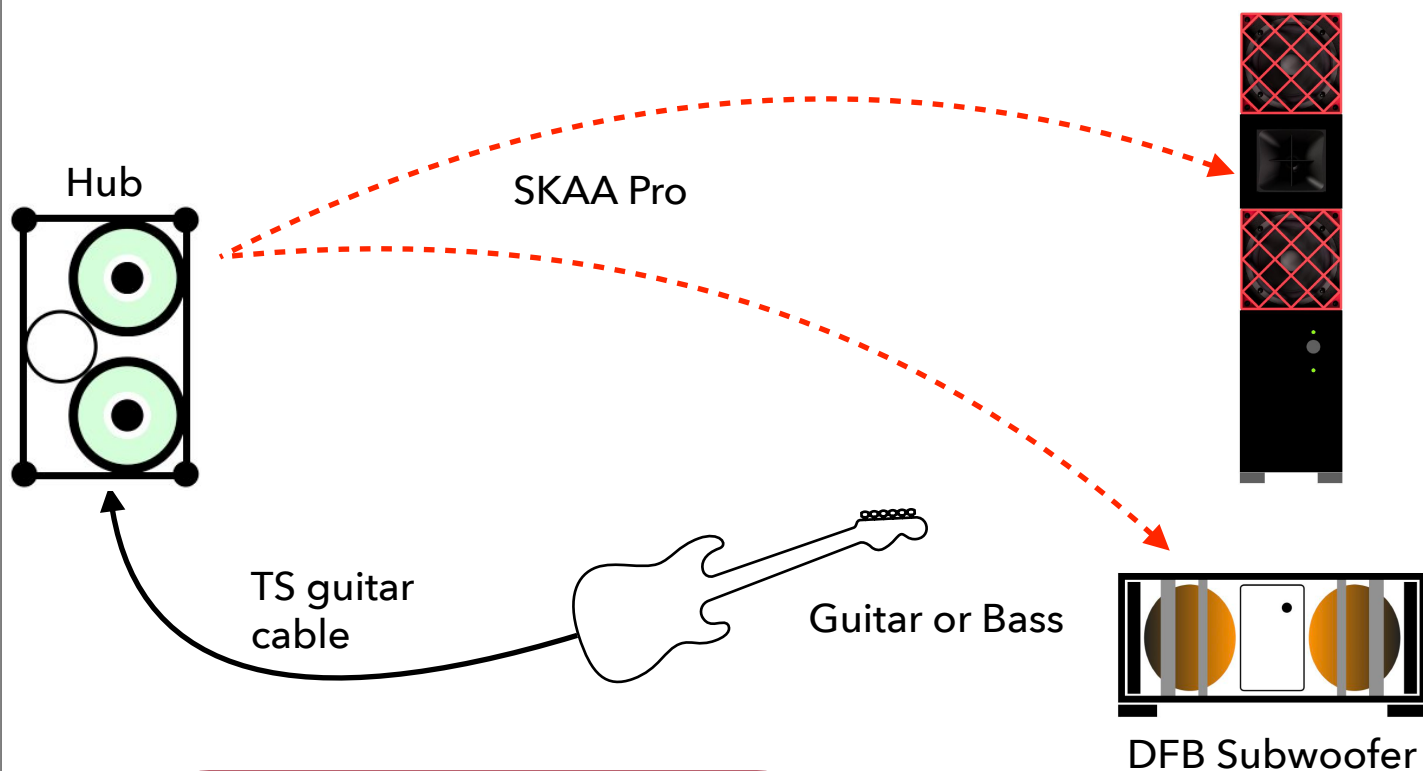

172

here, chose a SKAA Hub speaker with an instrument input such as Electrotec Stage One or Soundboks 3 or 4


with backing track

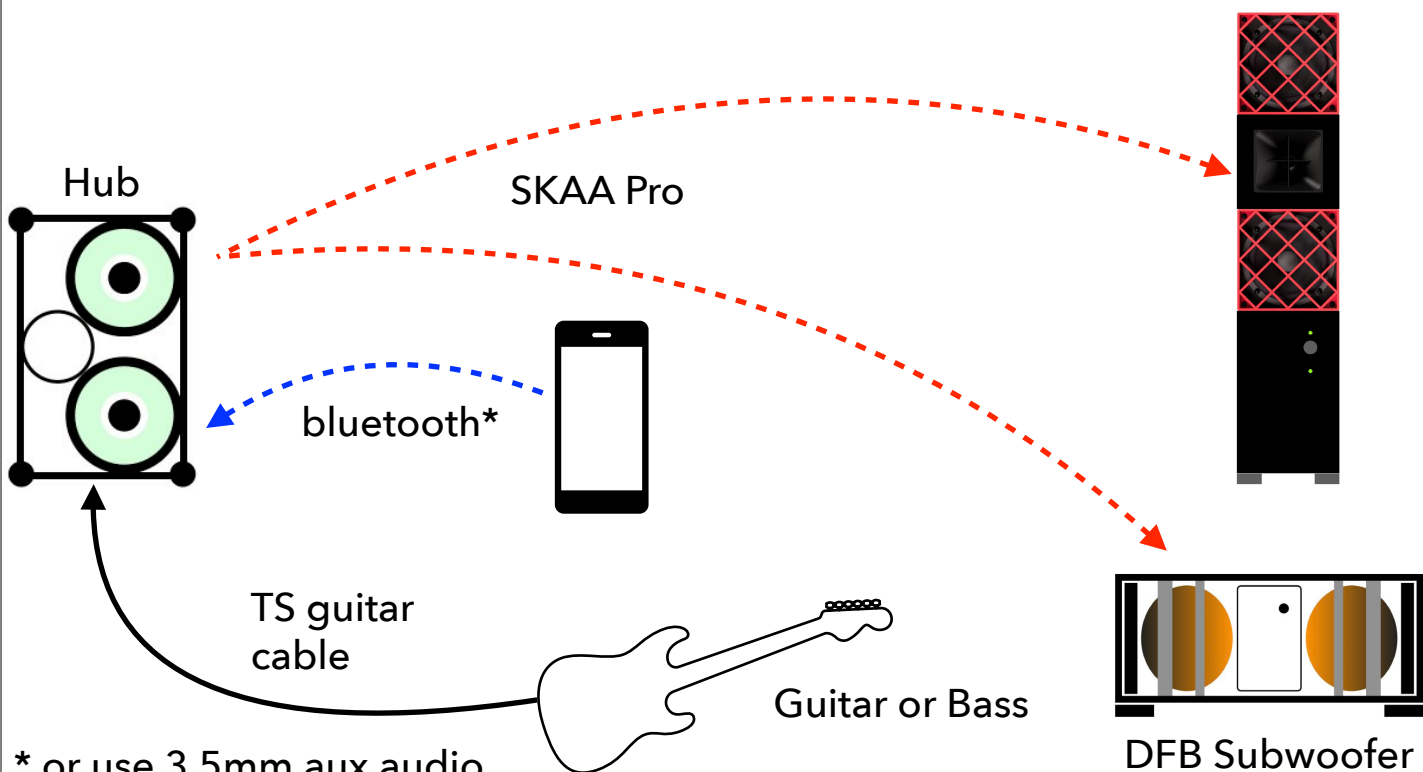

* or use 3.5mm aux audio


173

play completely wireless

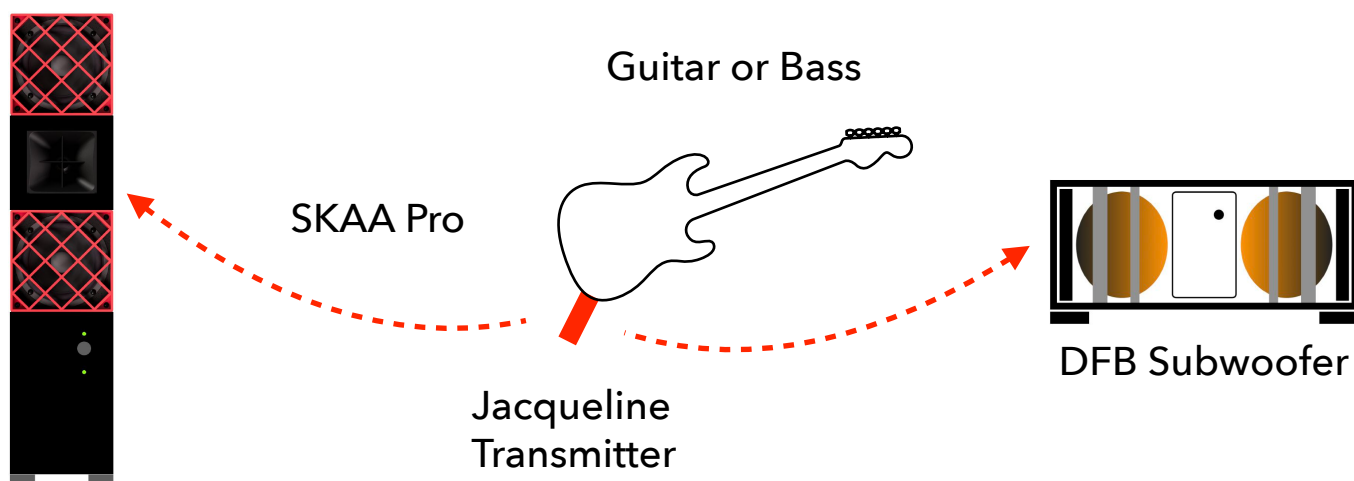



174

with backing track II

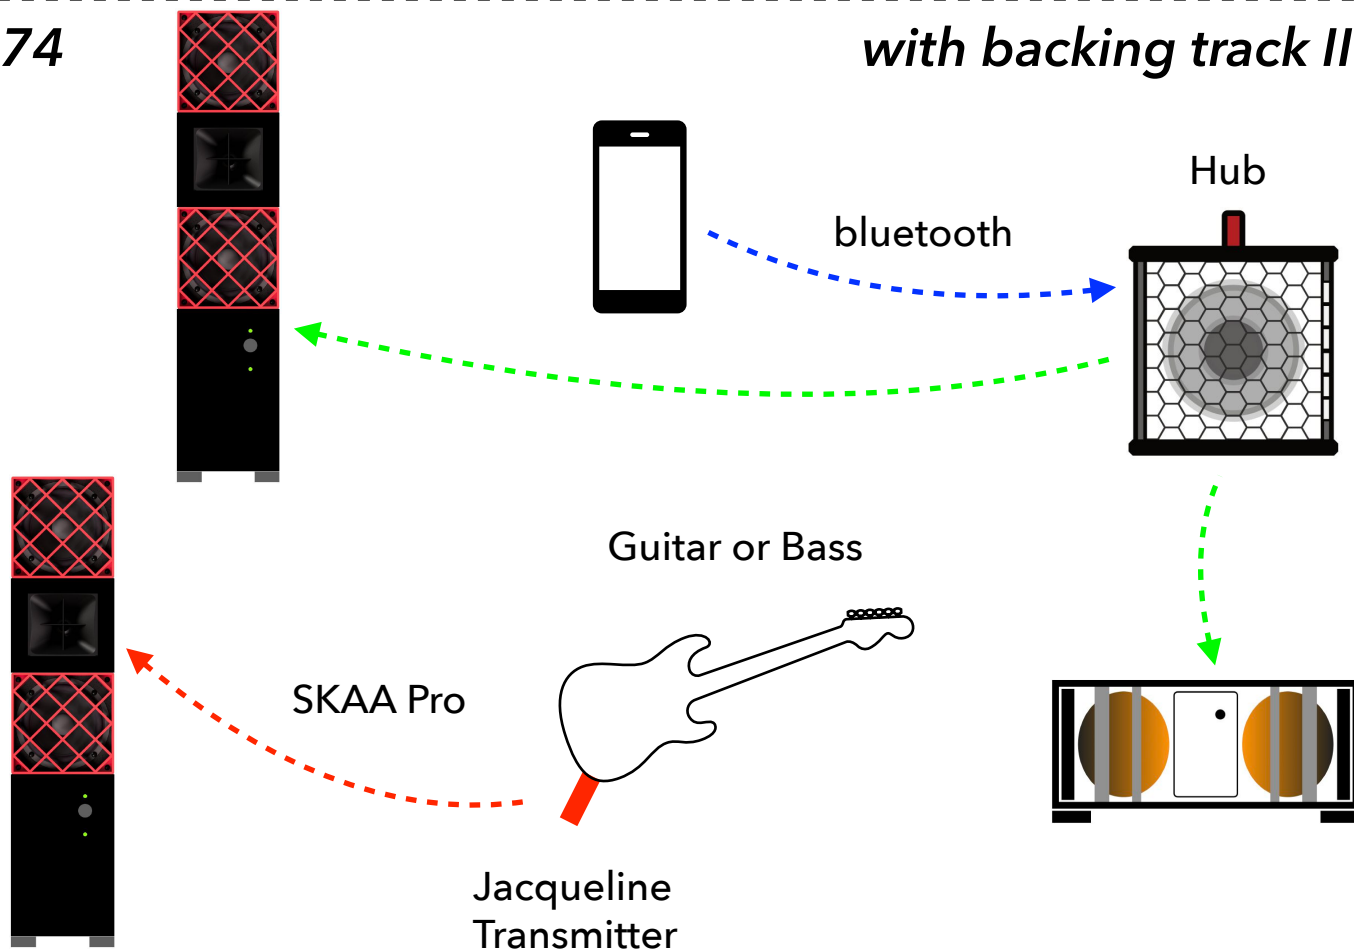


175

with backing track III

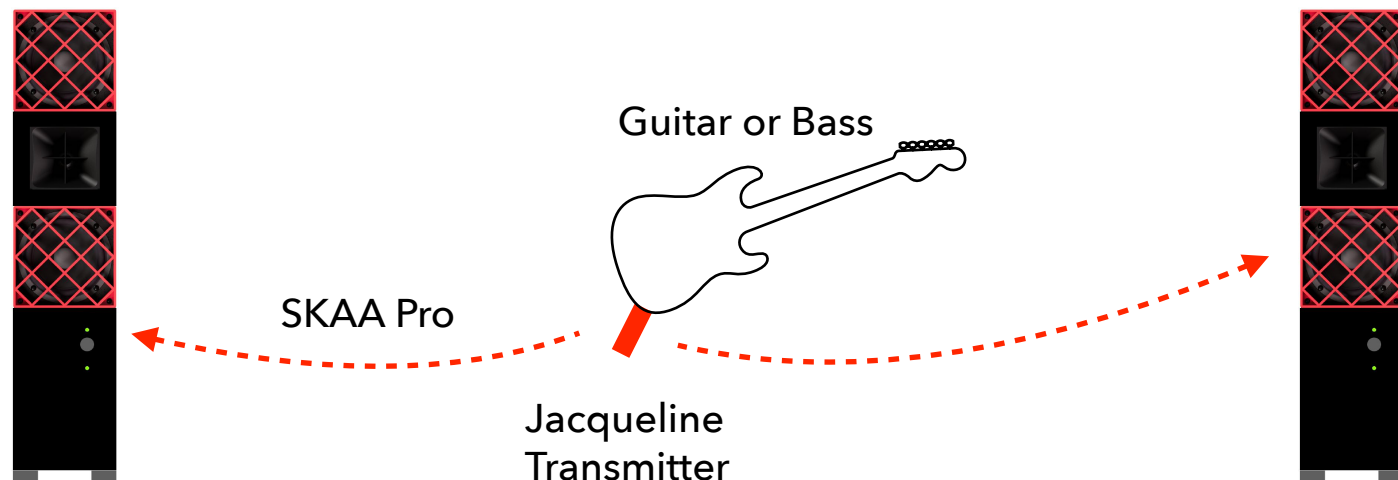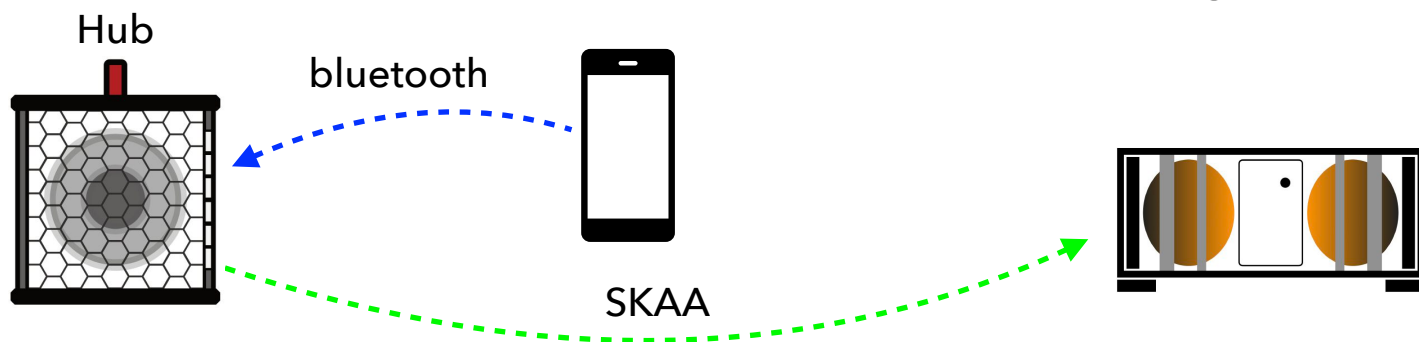


176

with backing track IV

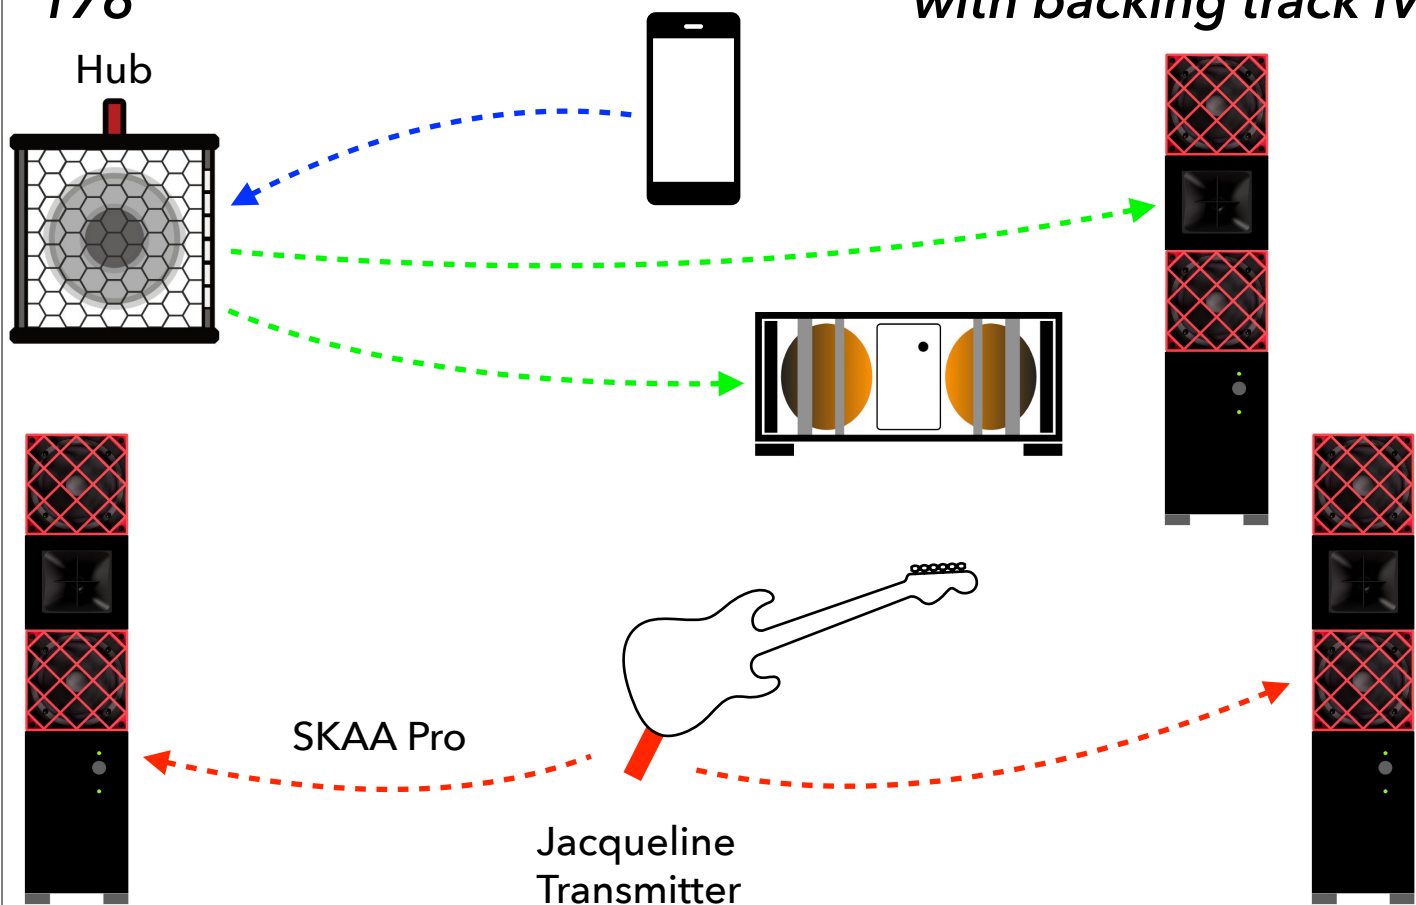


177

distortion & FX

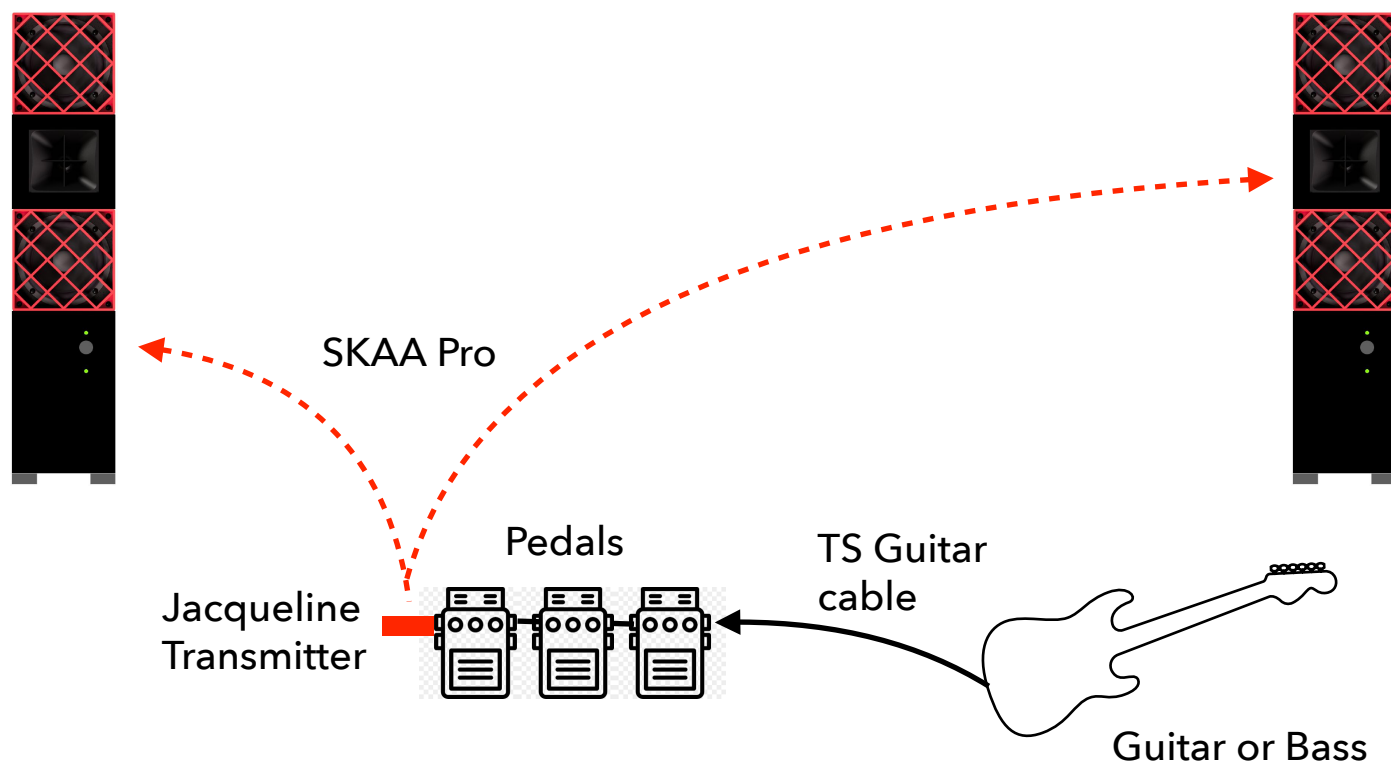


178

distortion & FX II

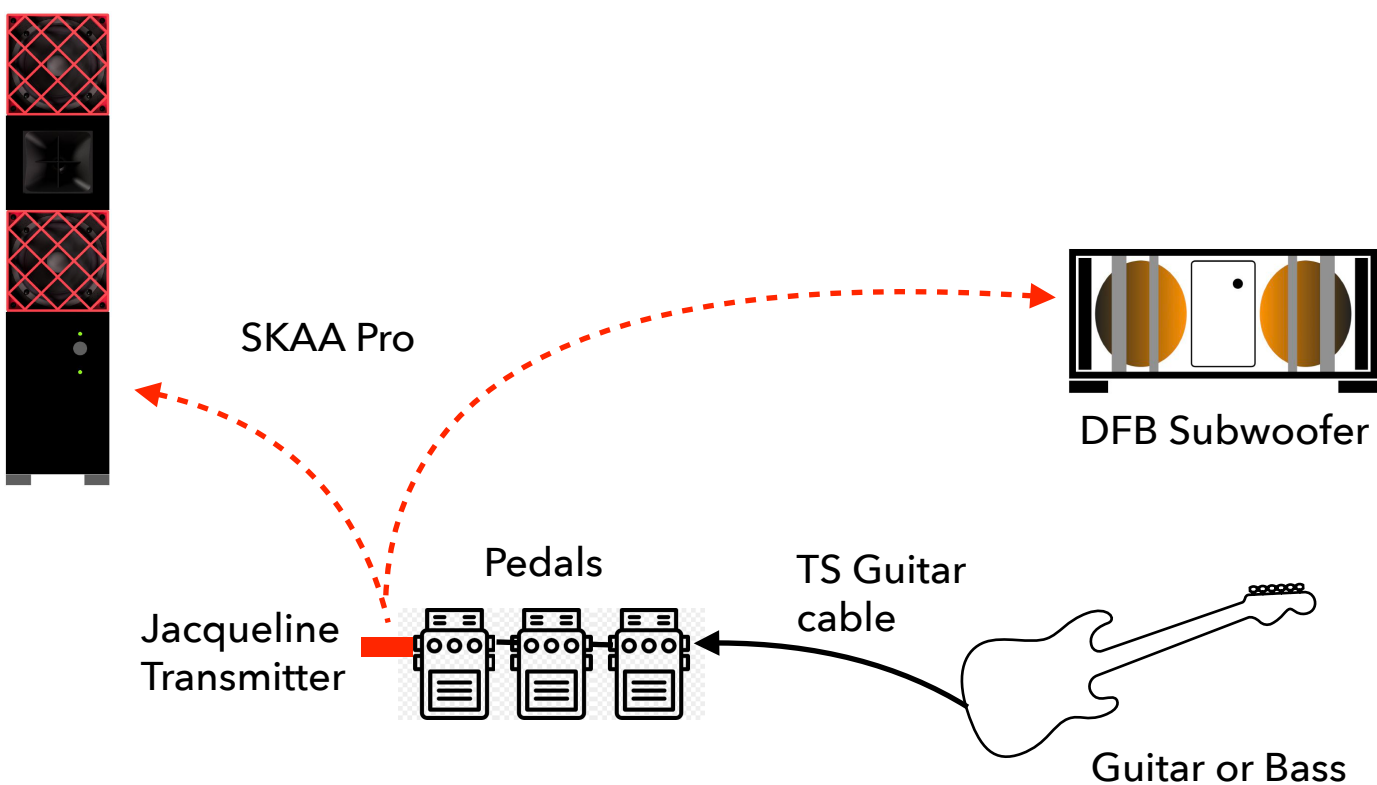

179


distortion, FX & backing

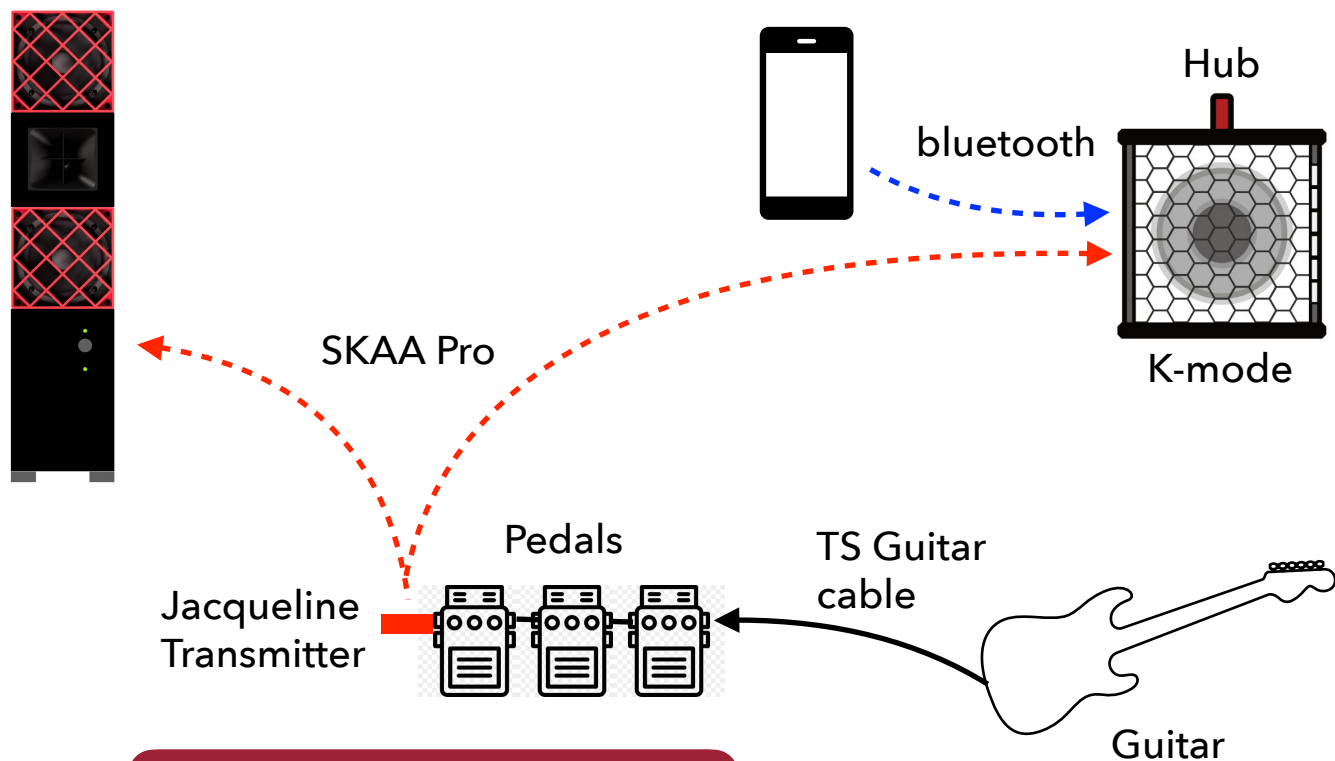

here, chose a SKAA Hub speaker which supports K-mode, such as Electrotec Stage One or Wet Sounds Portable


180

distortion, FX & backing II

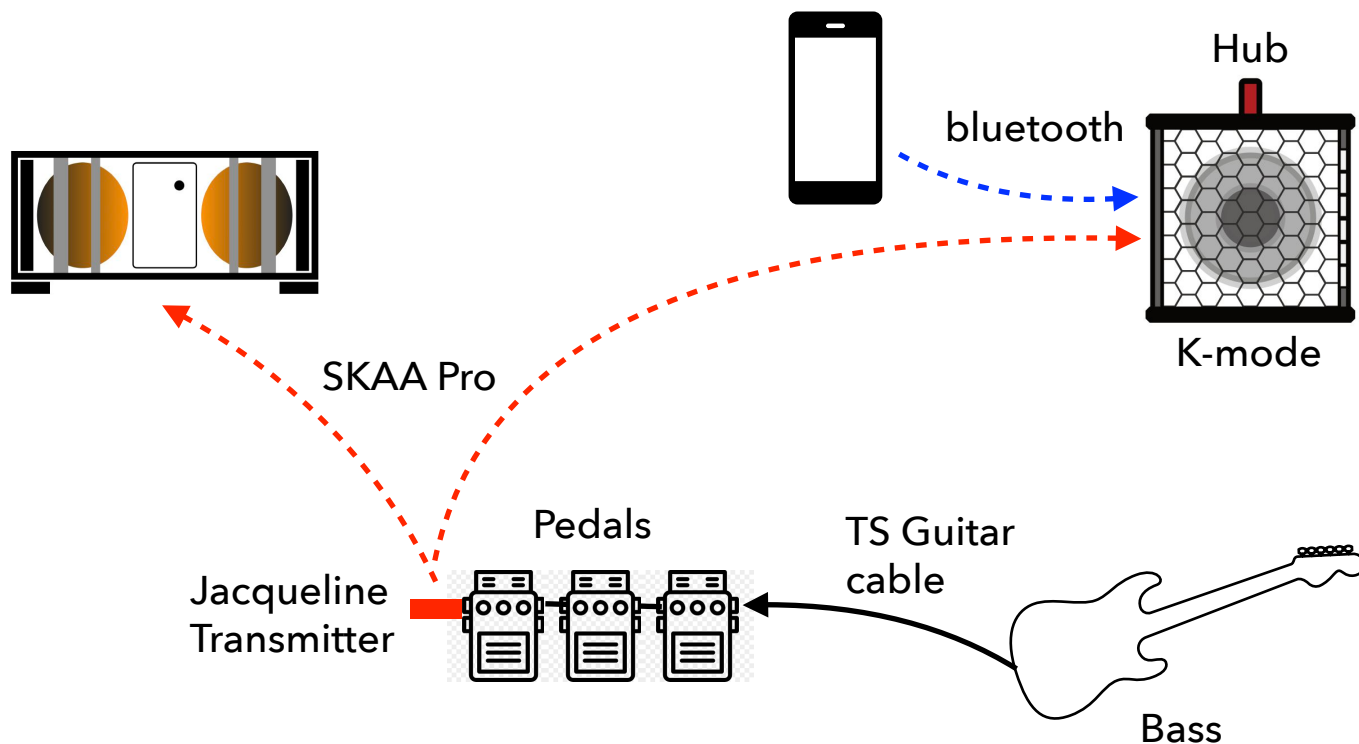


183

2-person jam

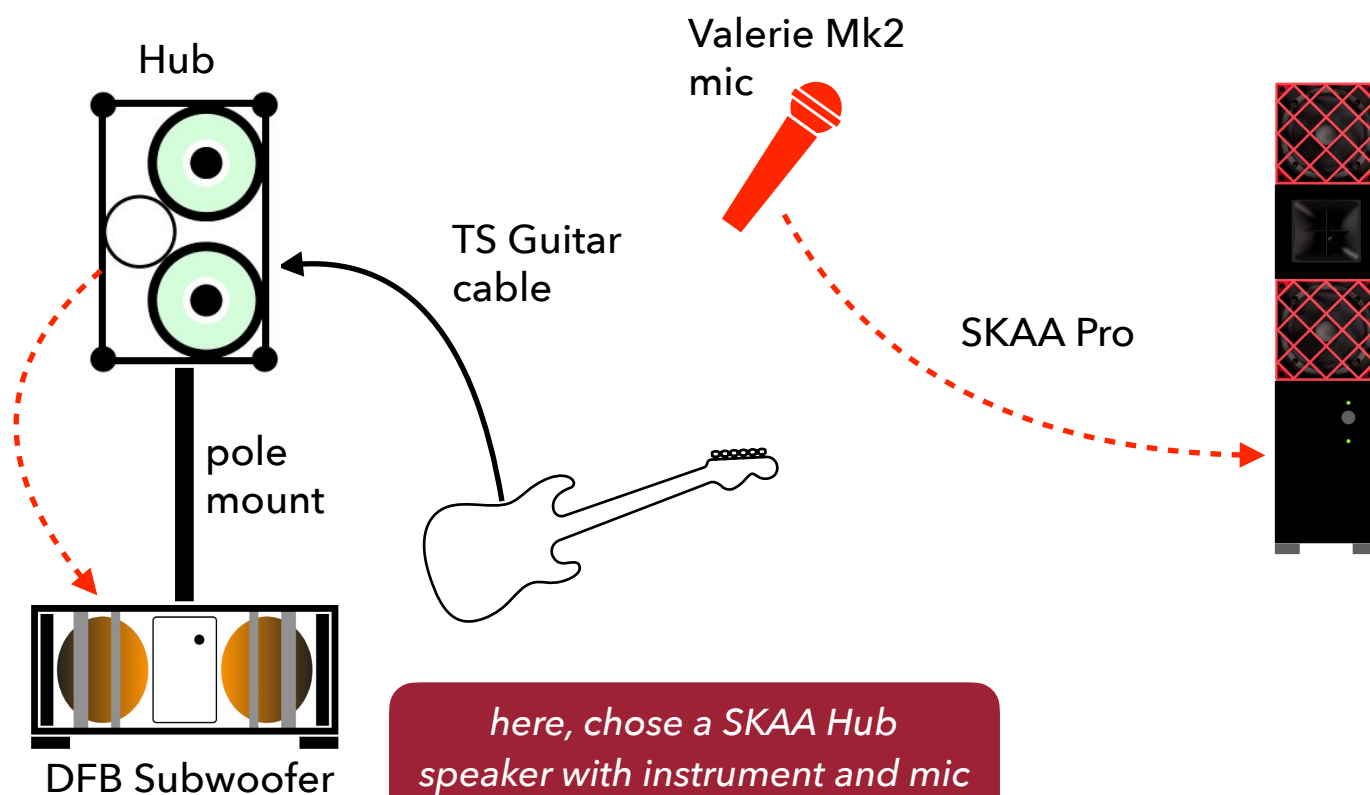


184

2-person jam II

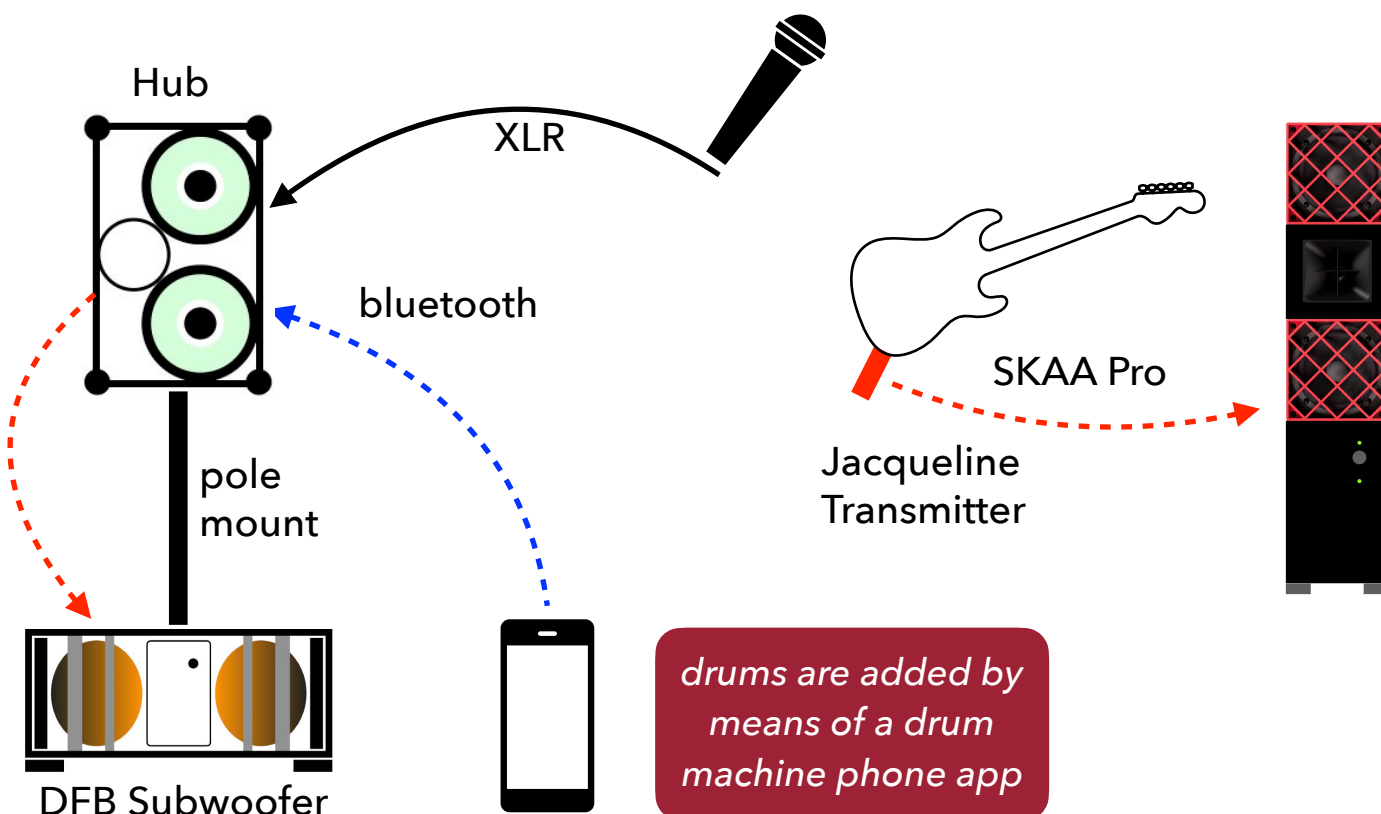


185

3-person jam & backing

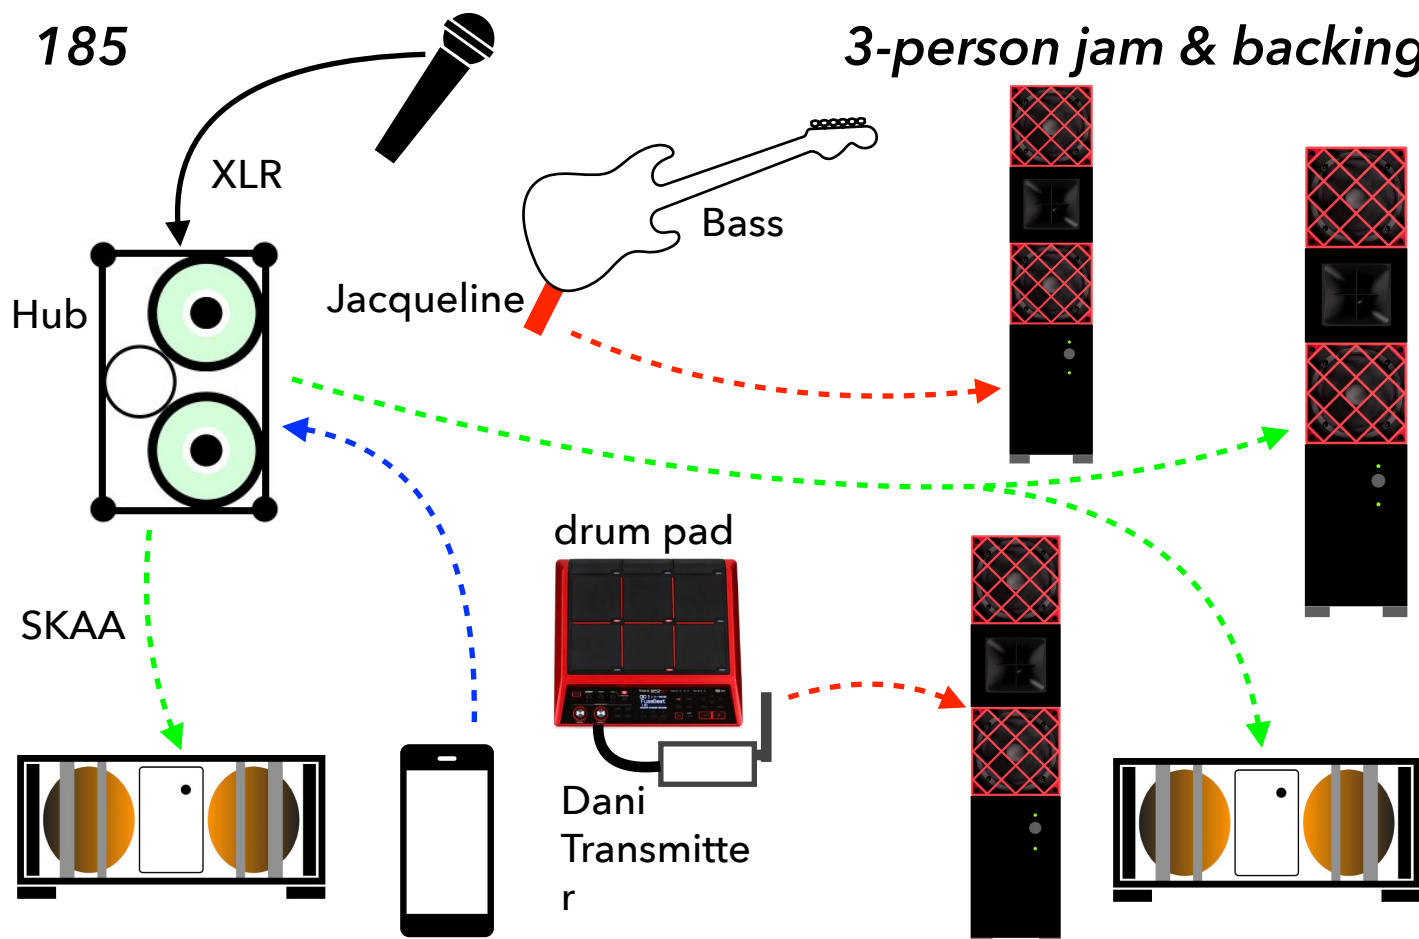


186

5-person jam

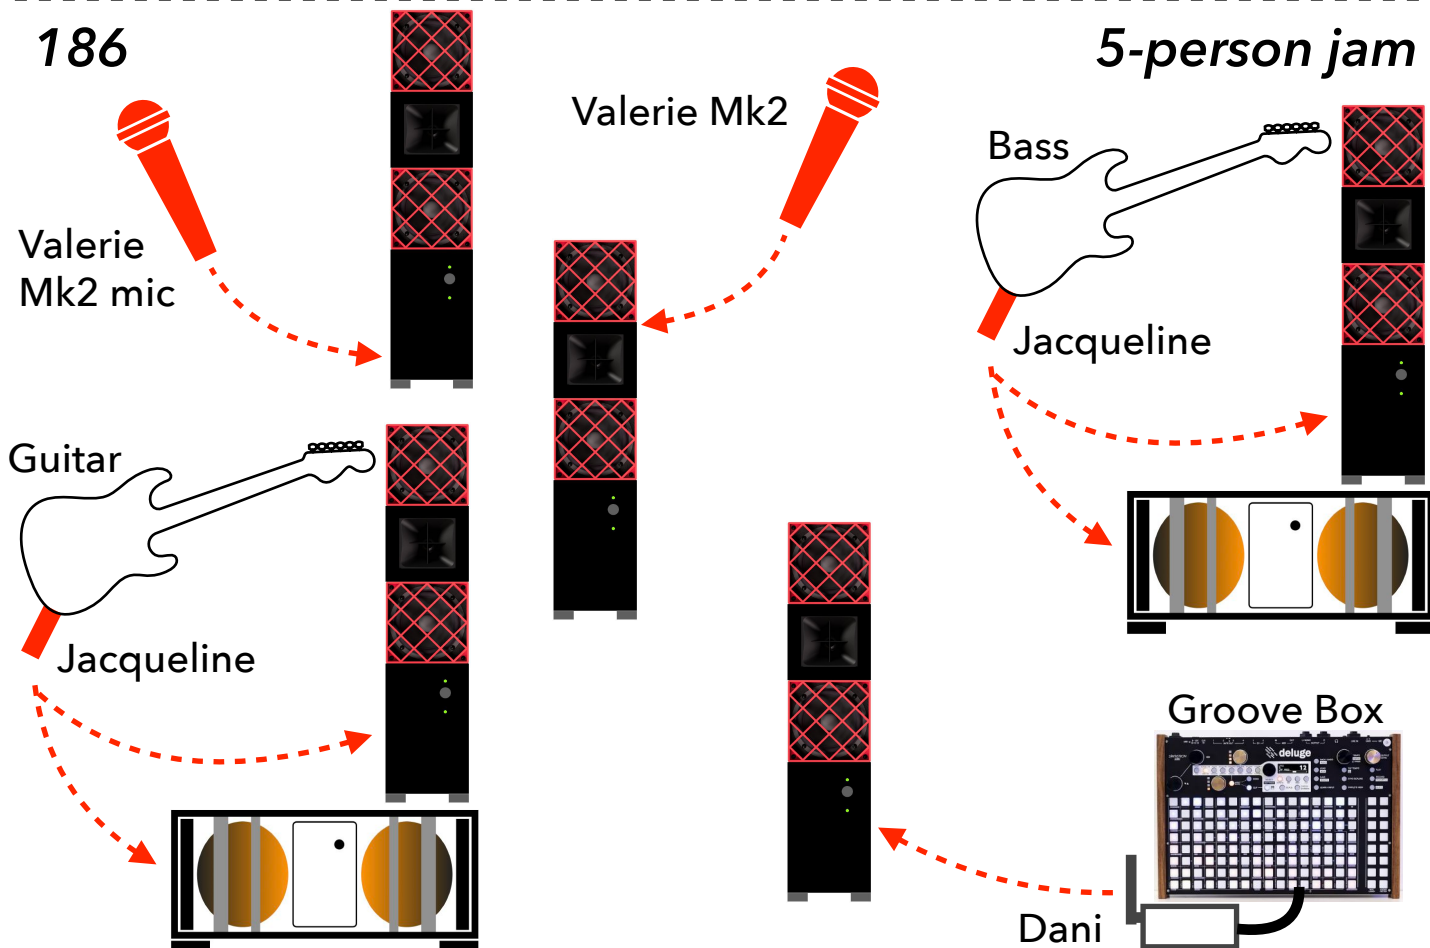

187


K-mode Jam

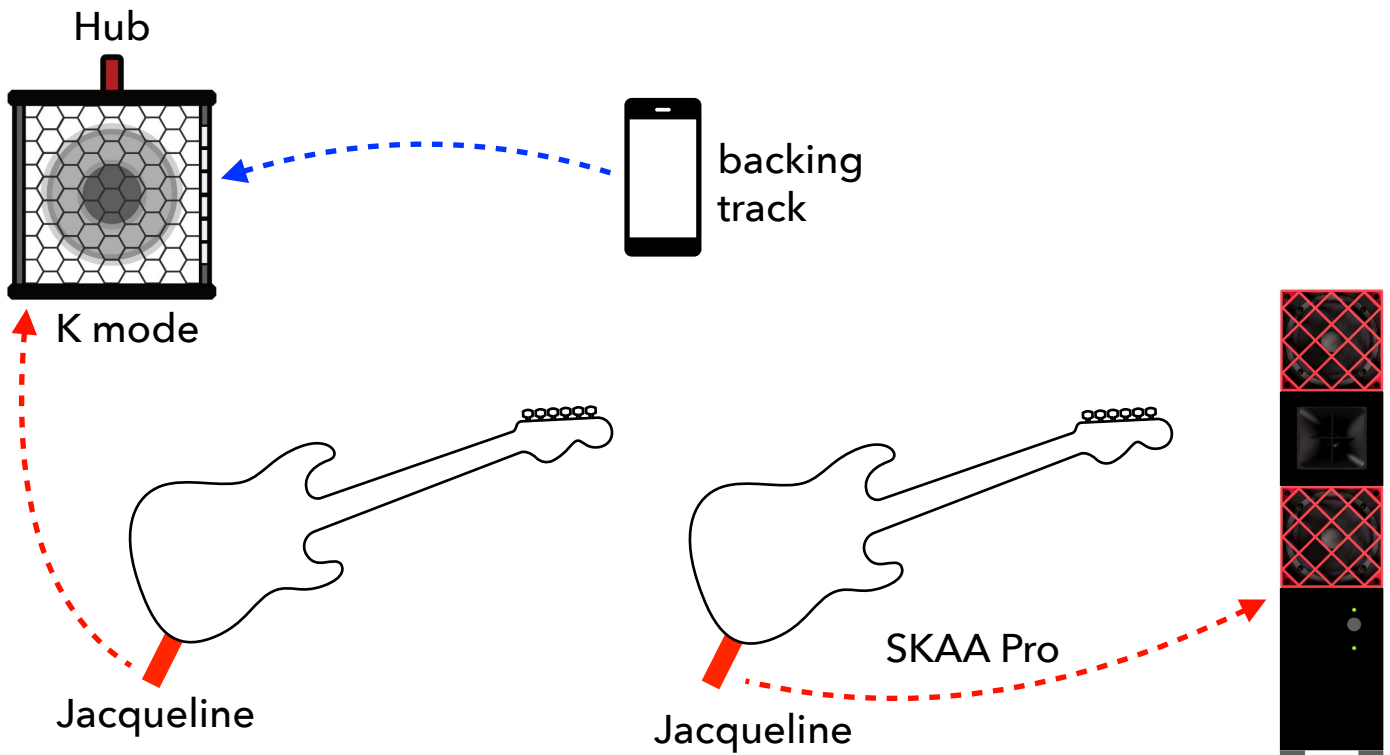

here, chose a SKAA Hub speaker which supports K-mode, such as Electrotec Stage One or Wet Sounds Portable


188

K-mode Jam II

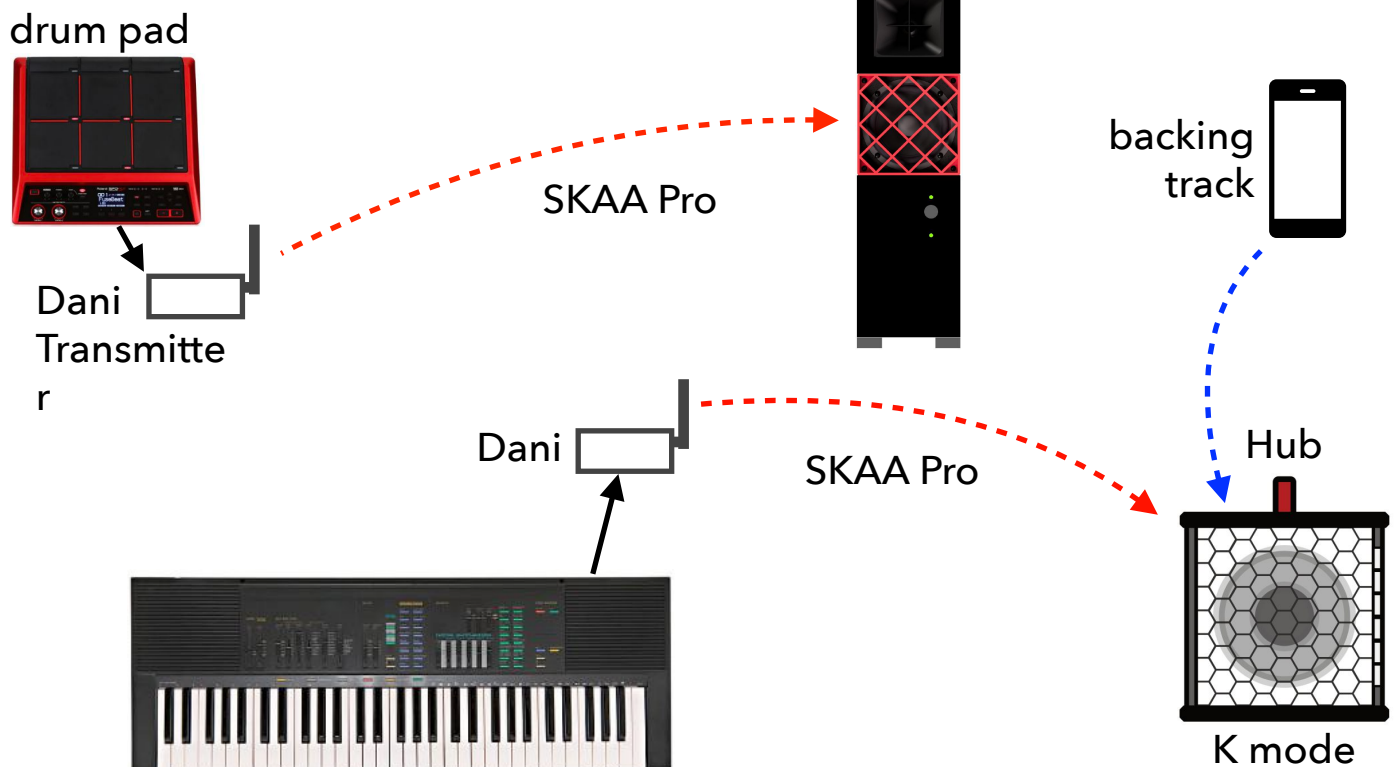


189

SKAA mixer jam

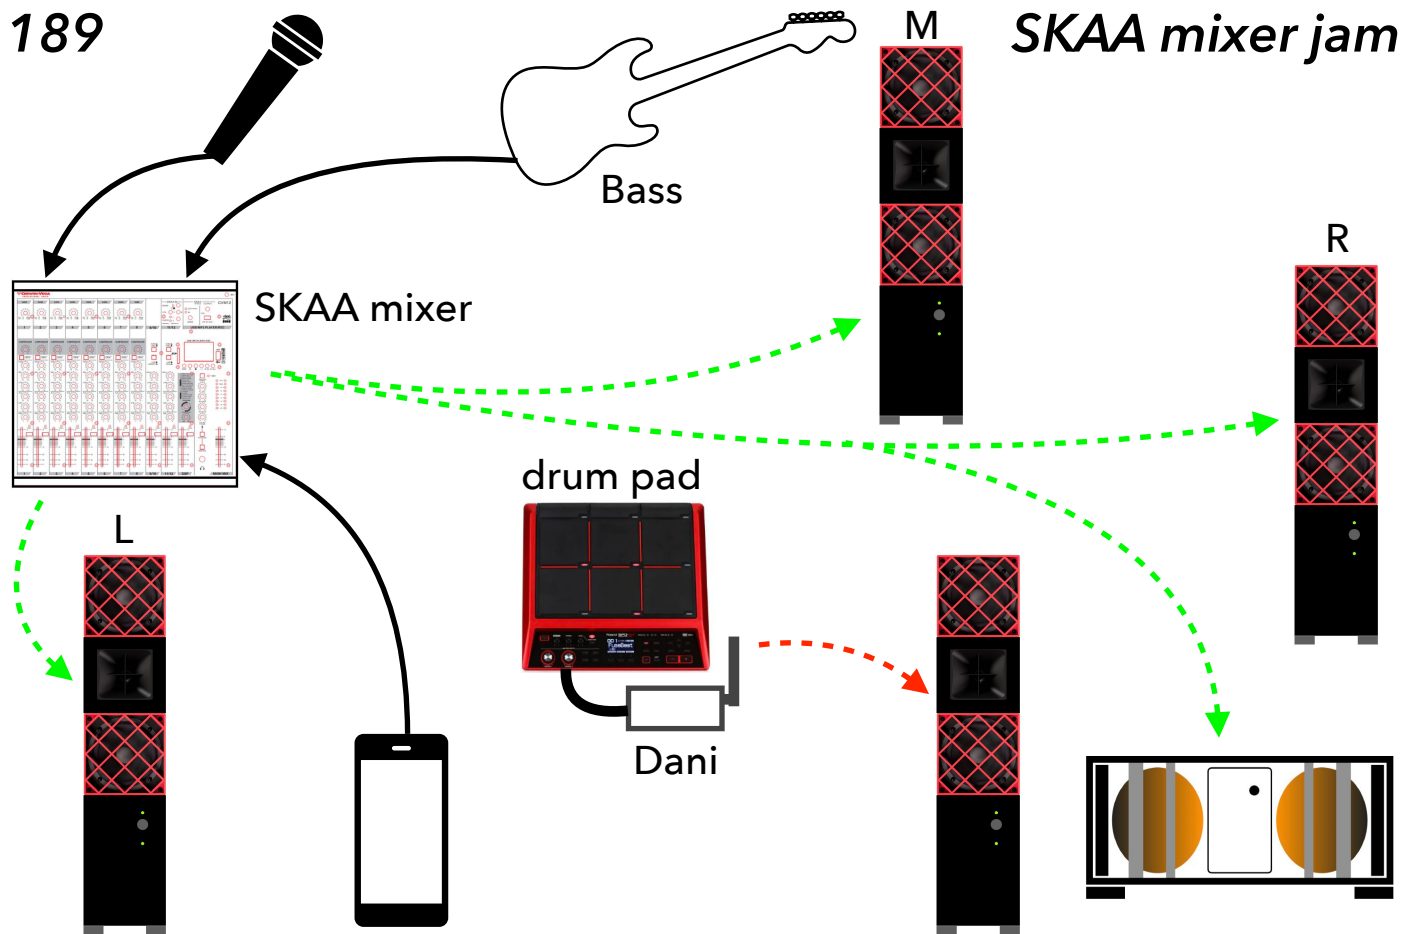

190


SKAA mixer jam II

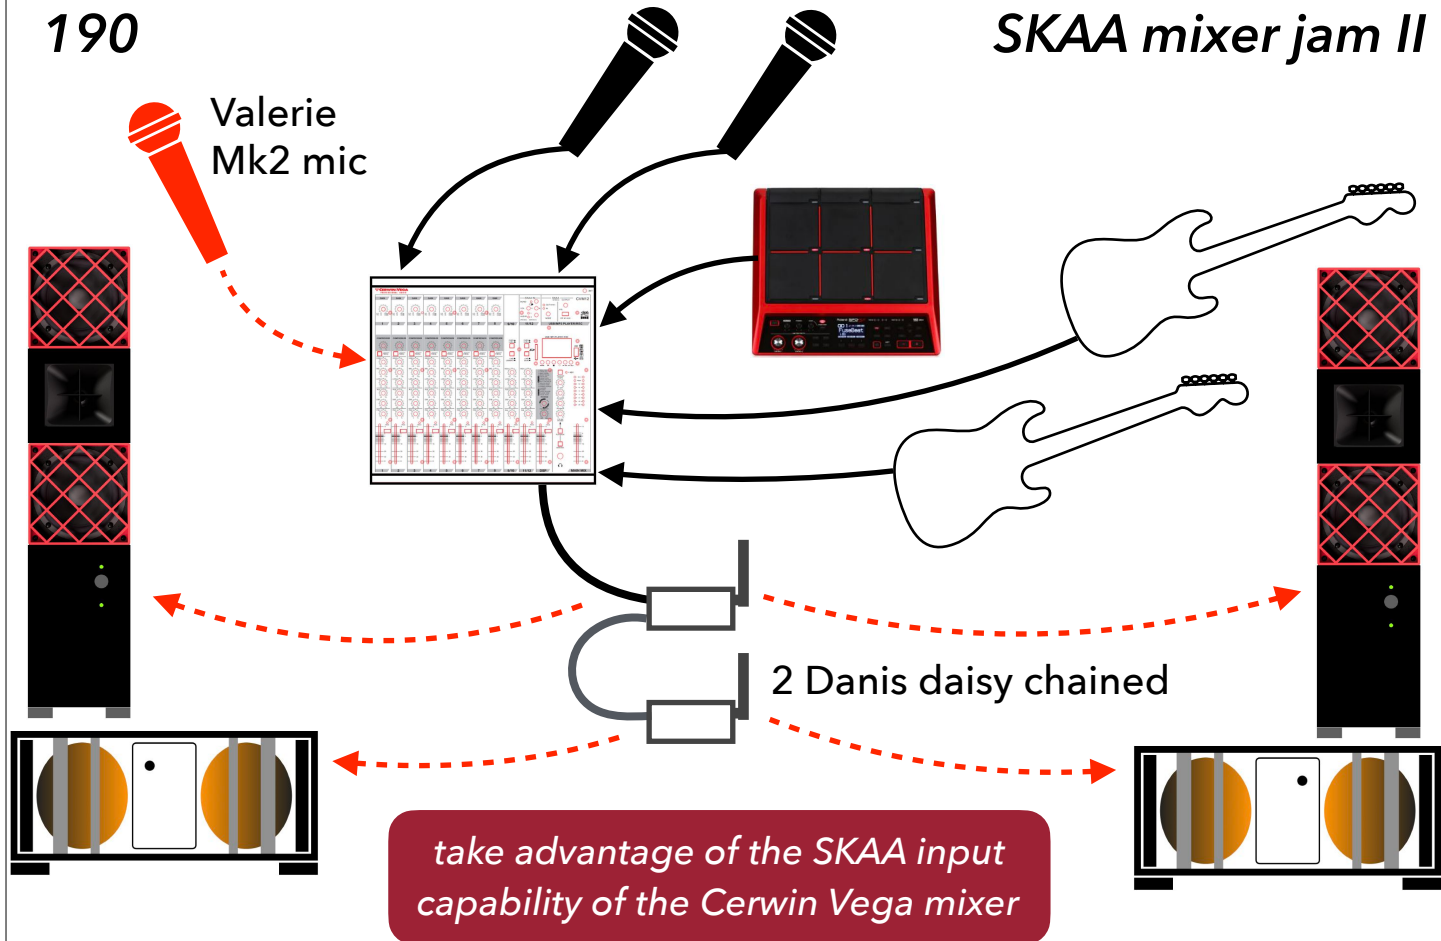


Creator

191

creator

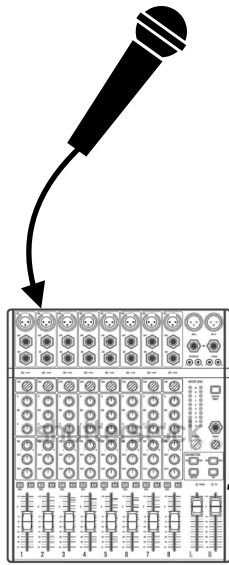

any mixer



Dani



Streetheart

it's the ol' Streetheart in the cameraman's backpack trick; usually the camera is setup to capture ambient sound on one audio channel and pristine mixed sound on the other

192


creator II



Valerie Mk2




Streetheart



SKAA mixer setup for SKAA input




Dani




193

corporate address

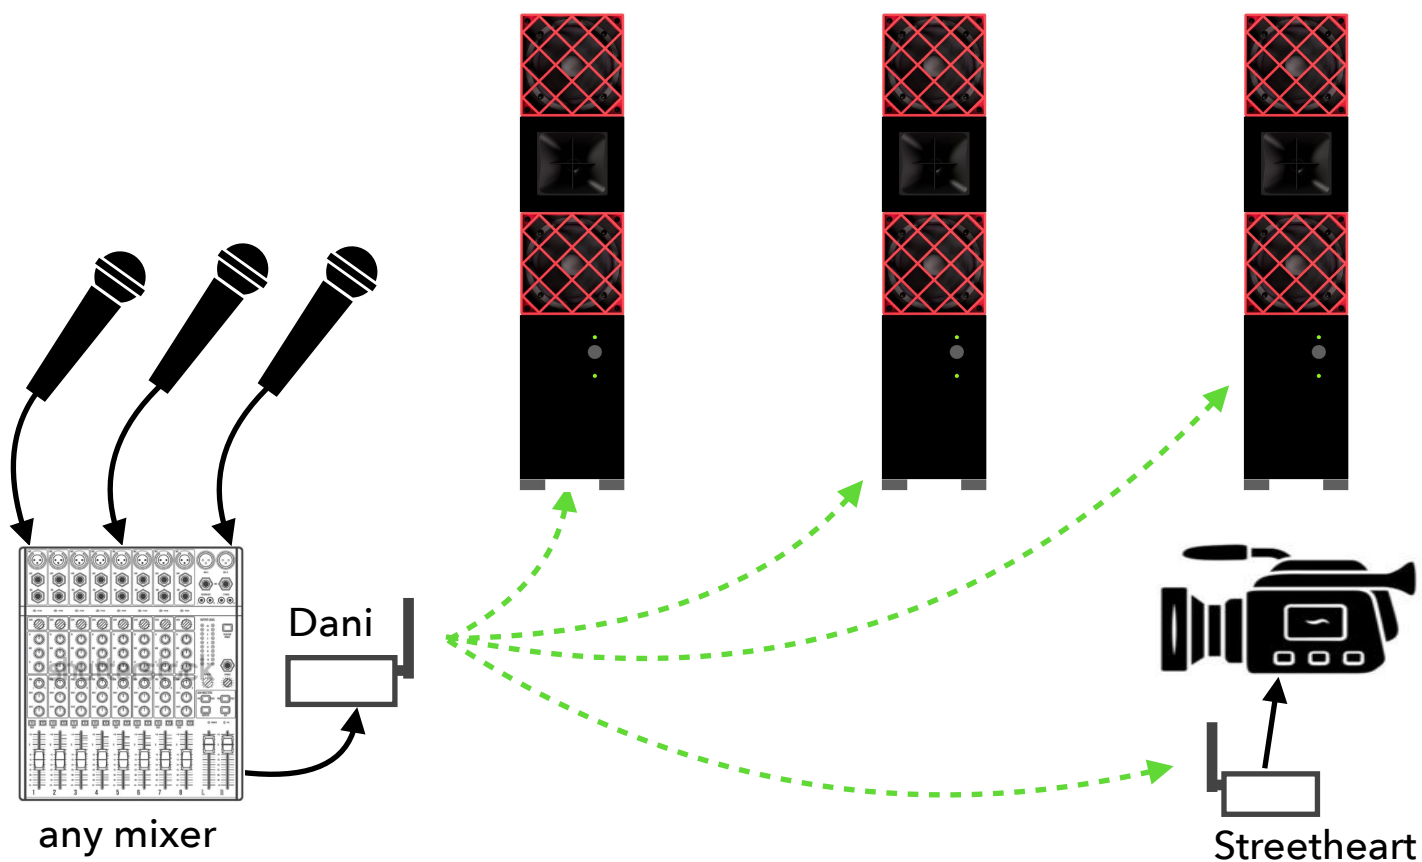


194

music video shoot

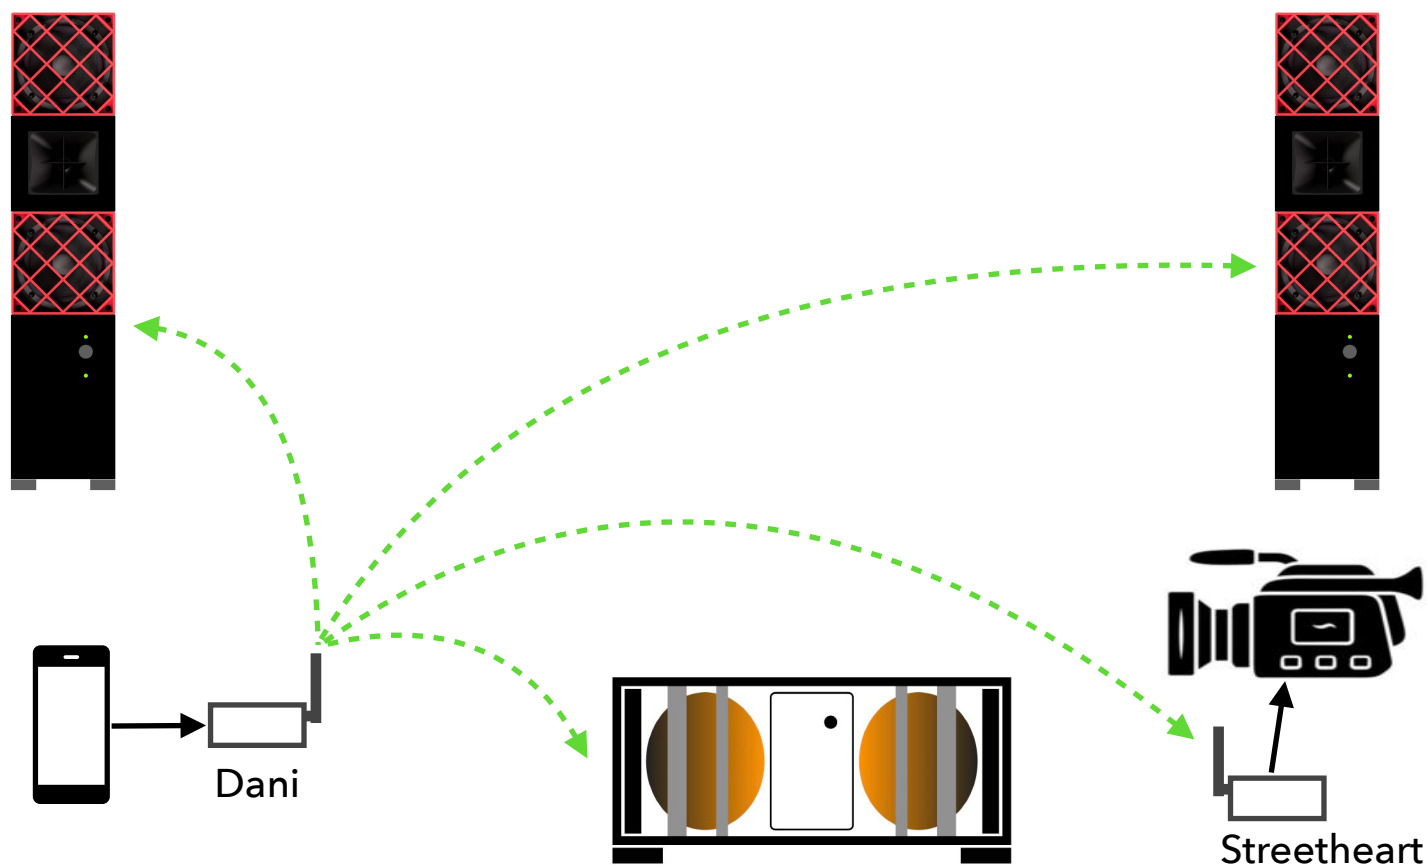


195

capture performance

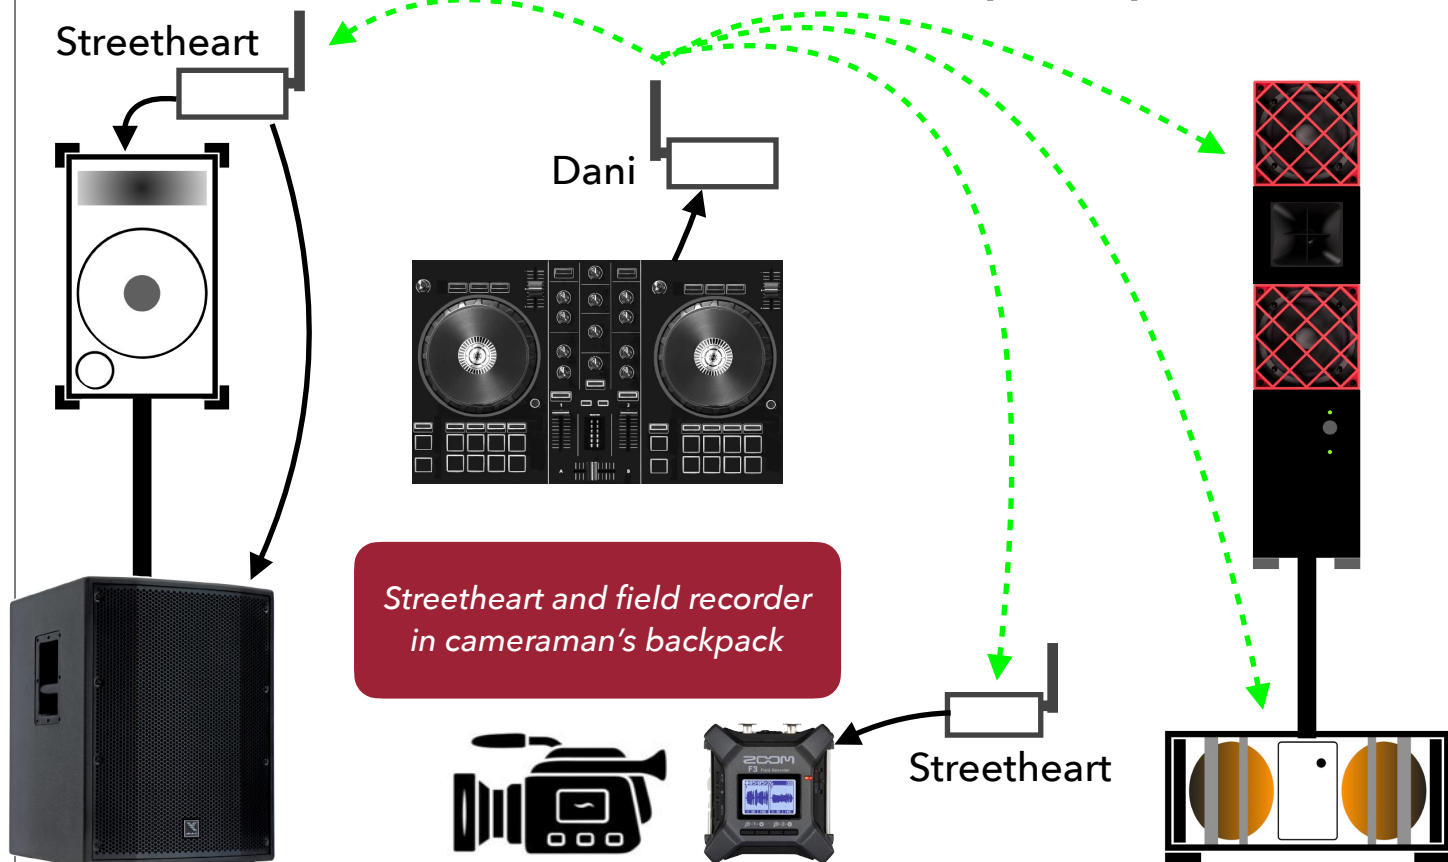

196


capture performance II

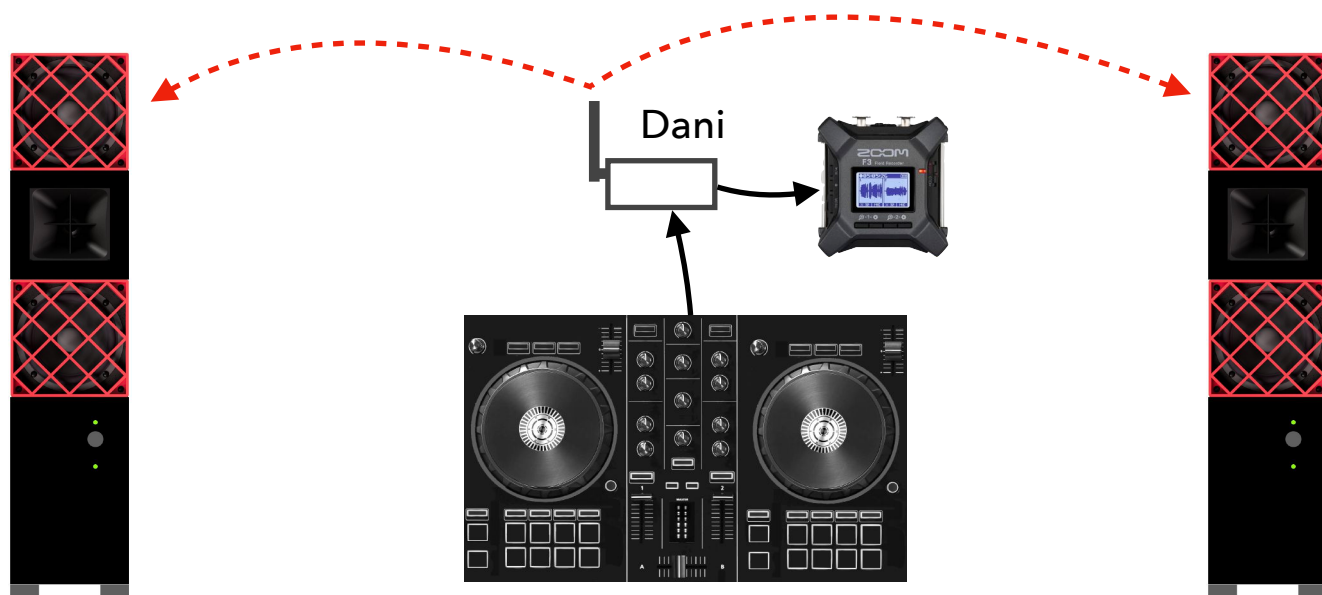

take advantage of the THRU's on Dani to record the performance on a field recorder


197

Joe R

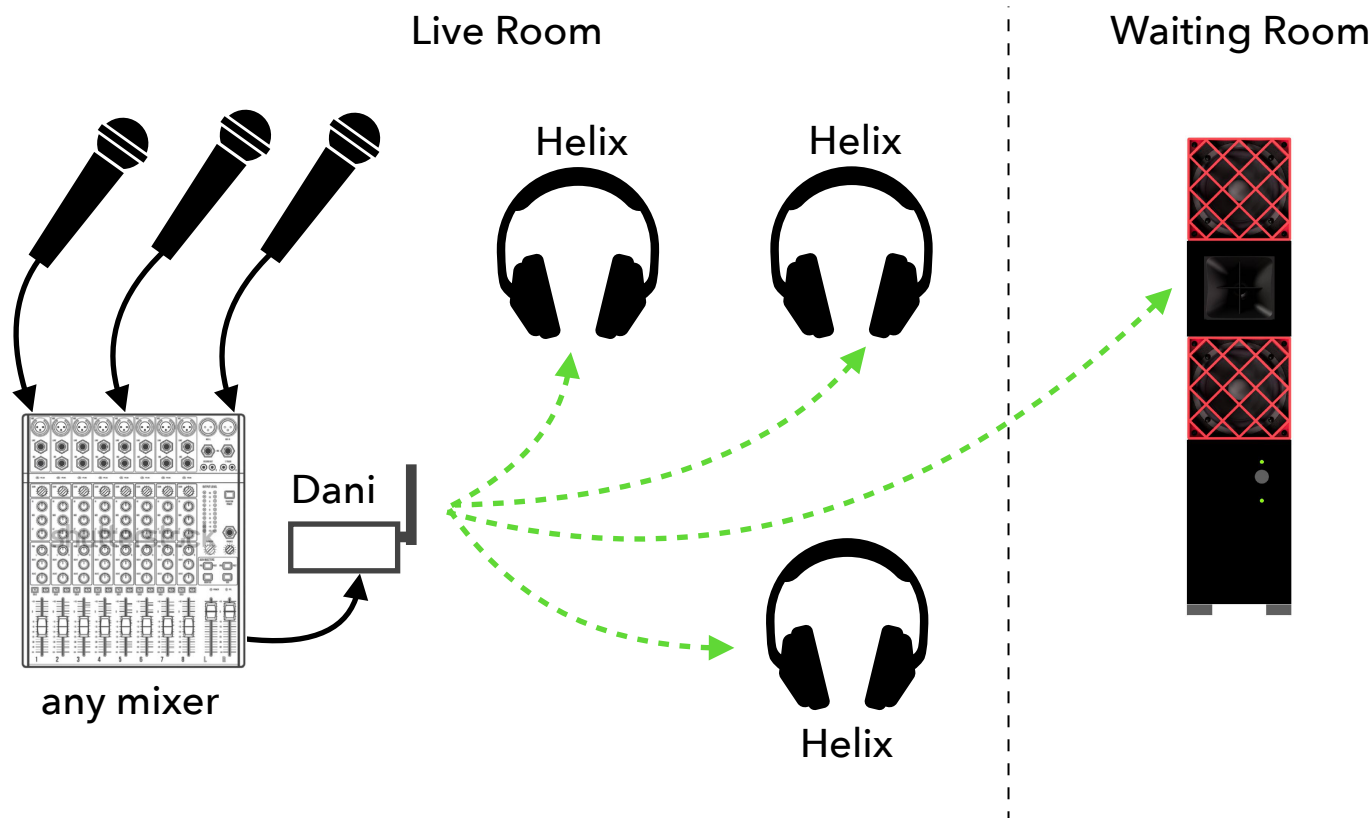


198

Joe R II

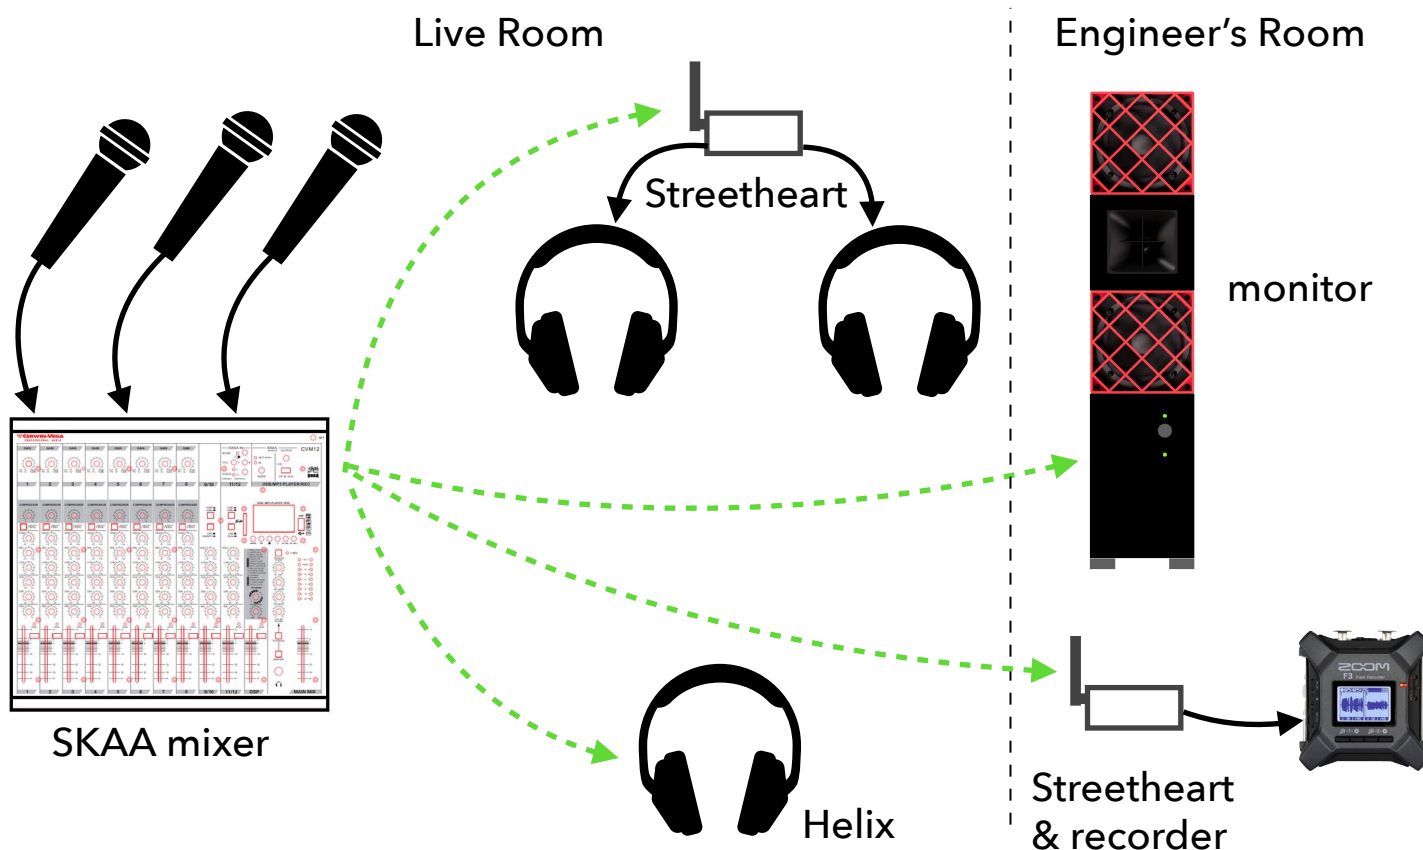


199

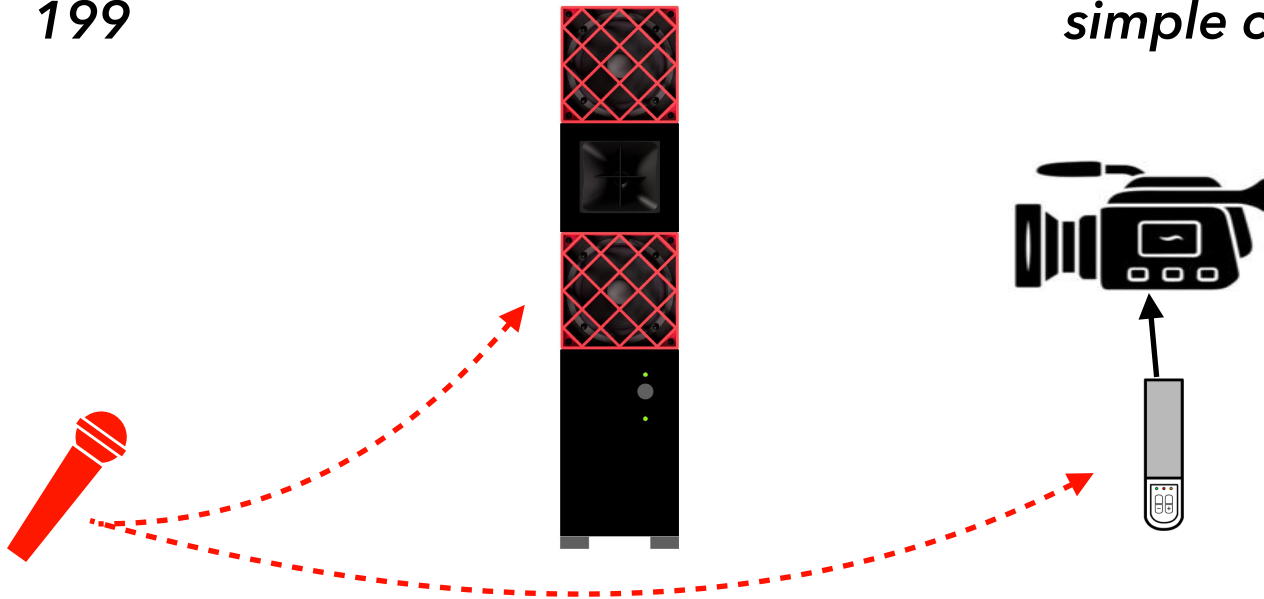simple capture

we take advantage of the fact the Valerie Mk2 SKAA Pro mic can send audio to 2 destinations, and capture that audio on our camera at the same time we're capturing video – A-Link Plus is a good Receiver for this since it's long-range, light weight and has a built-in battery

200

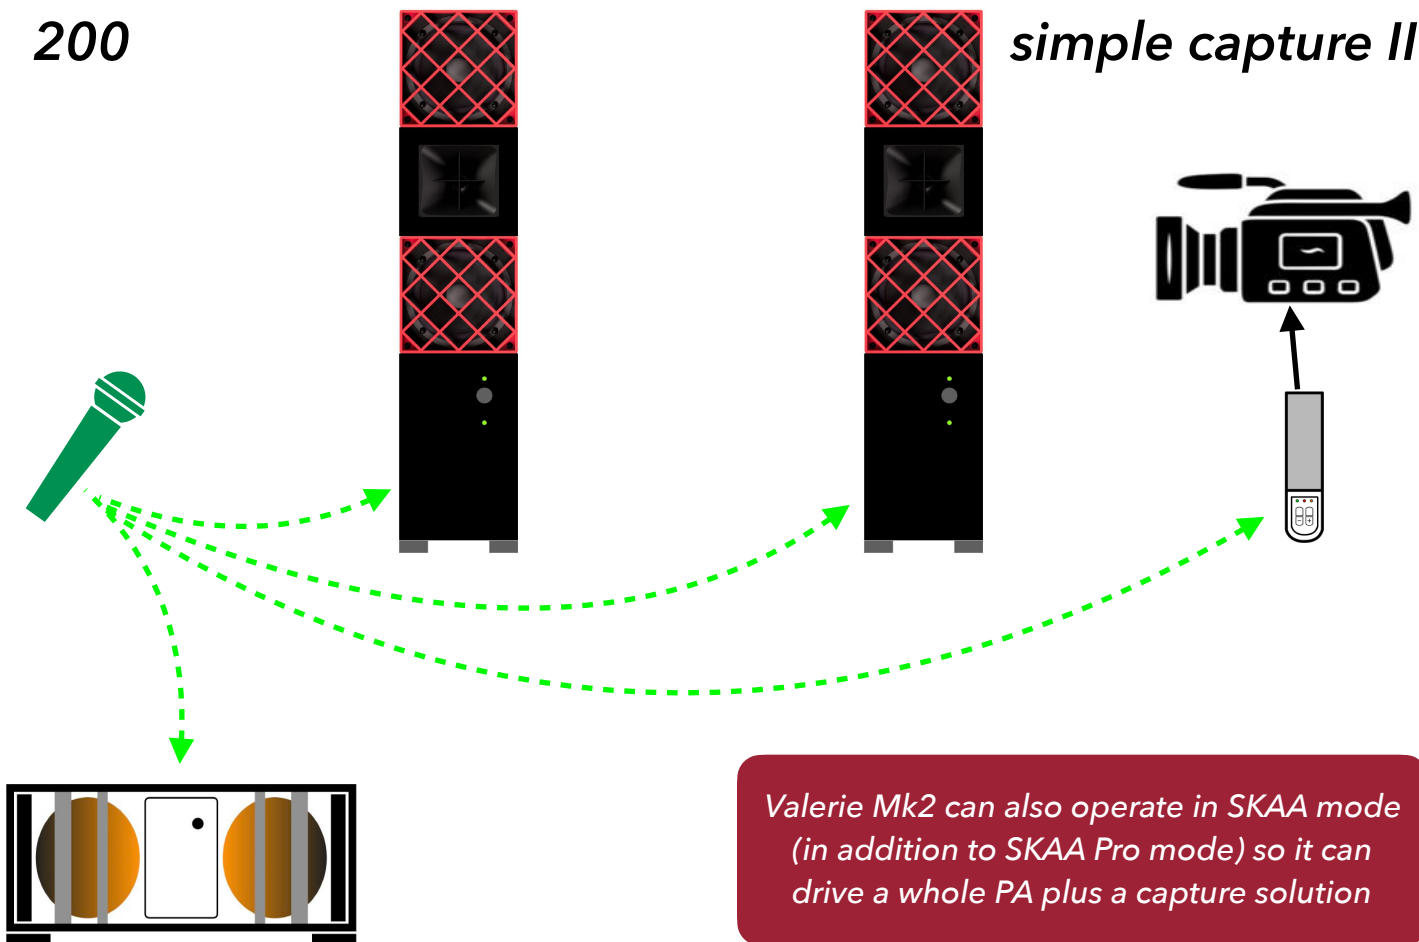
simple capture II

Valerie Mk2 can also operate in SKAA mode (in addition to SKAA Pro mode) so it can drive a whole PA plus a capture solution

Yard & Pool


201

phone pool party

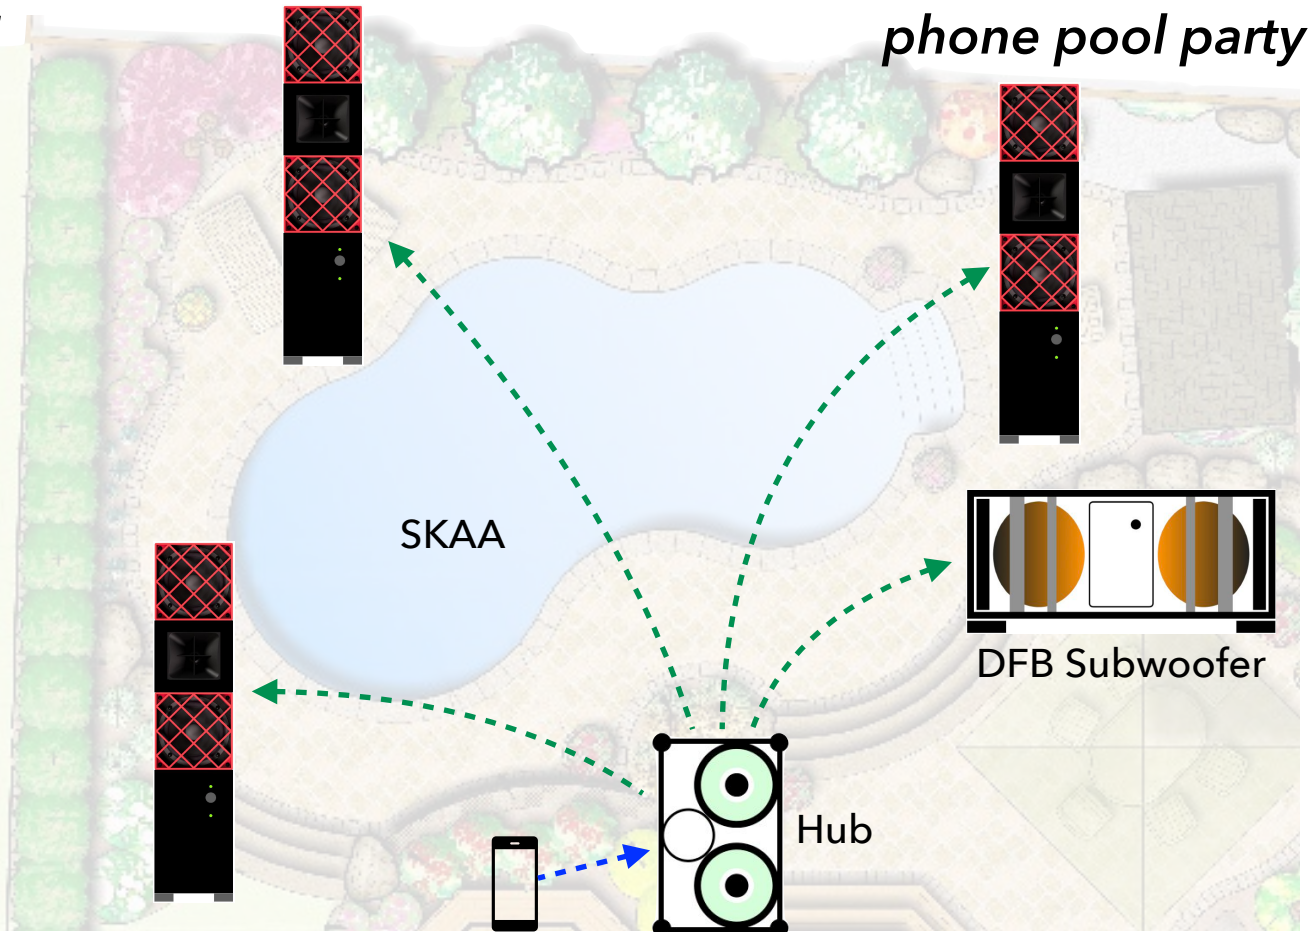


202

... now stream Spotify from the house wif

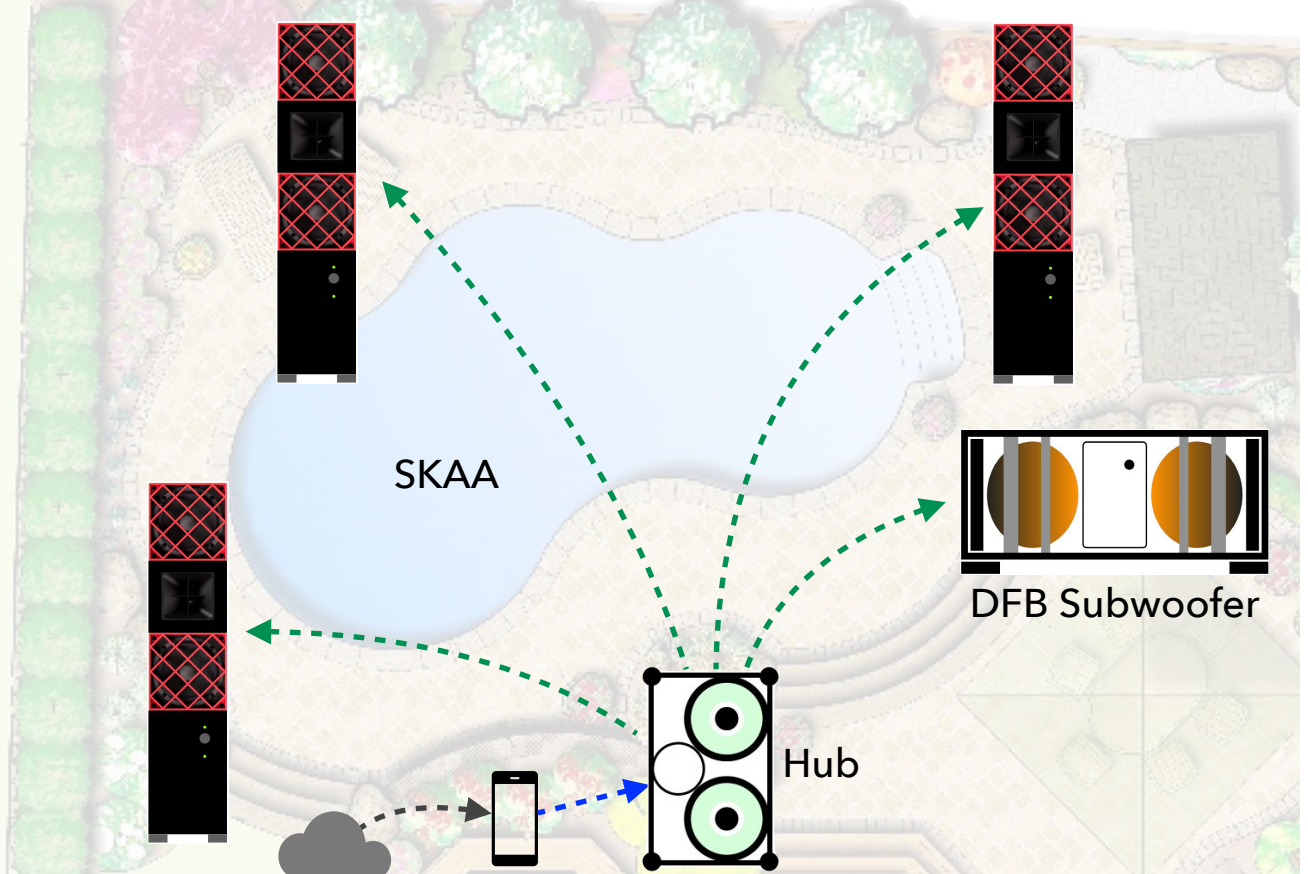


203

DJ pool party

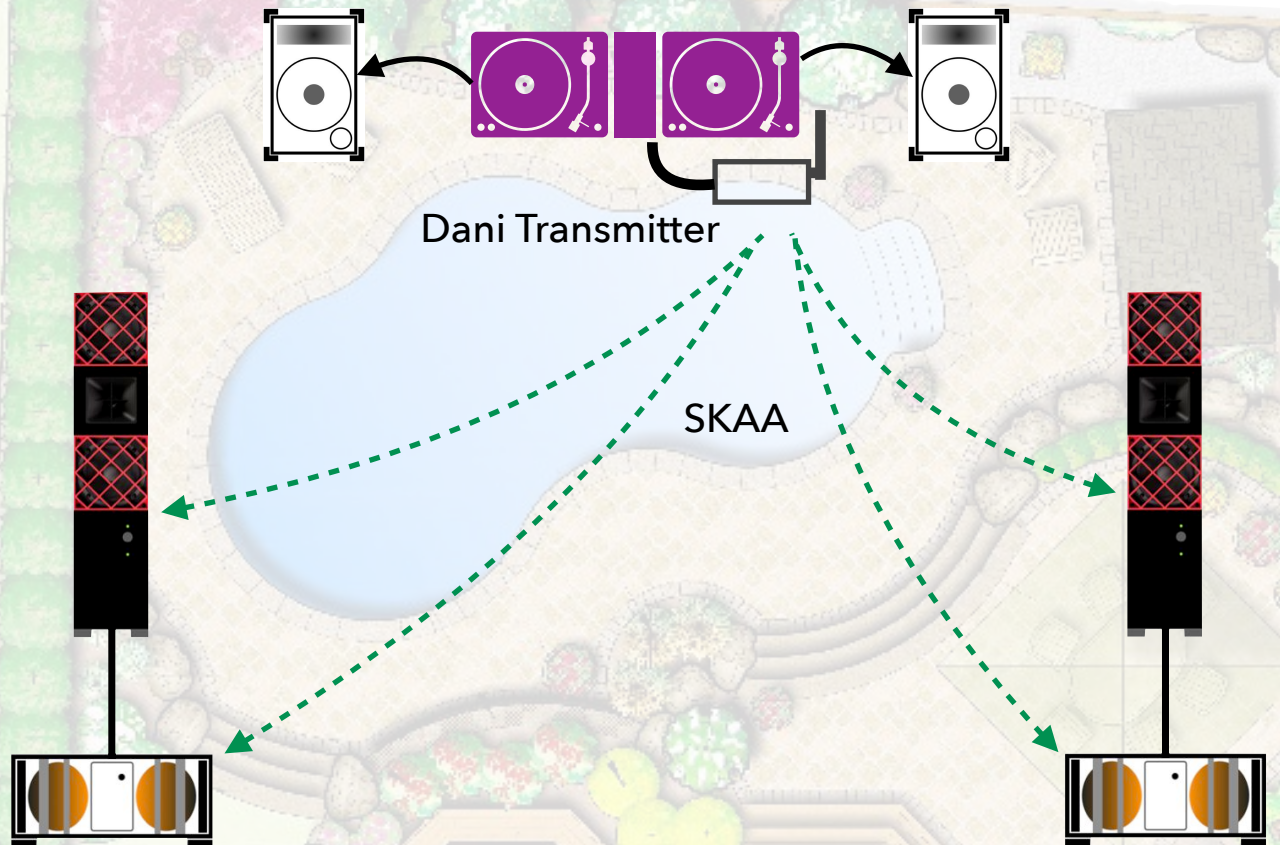


204

mondo DJ pool party

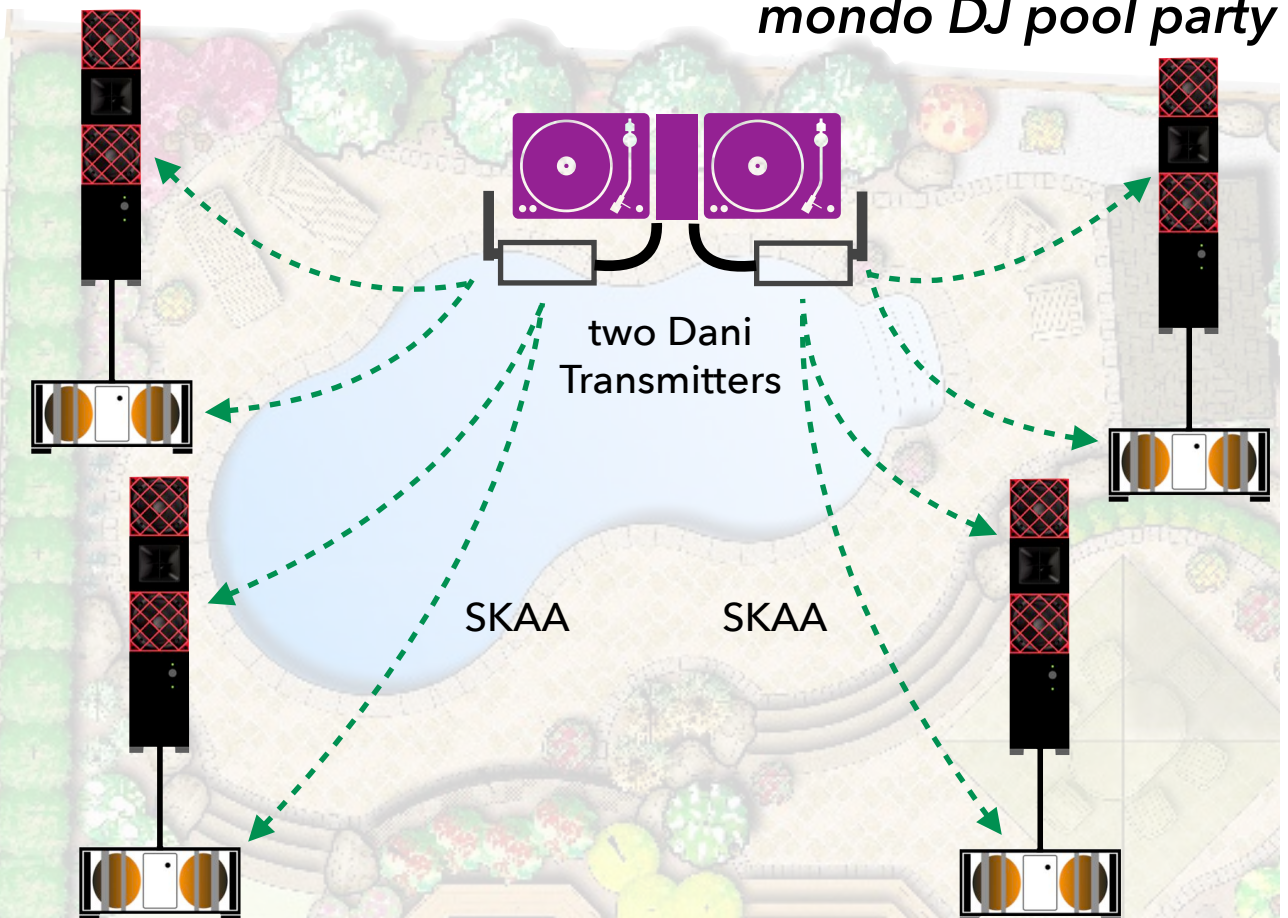


205

Surf Bum

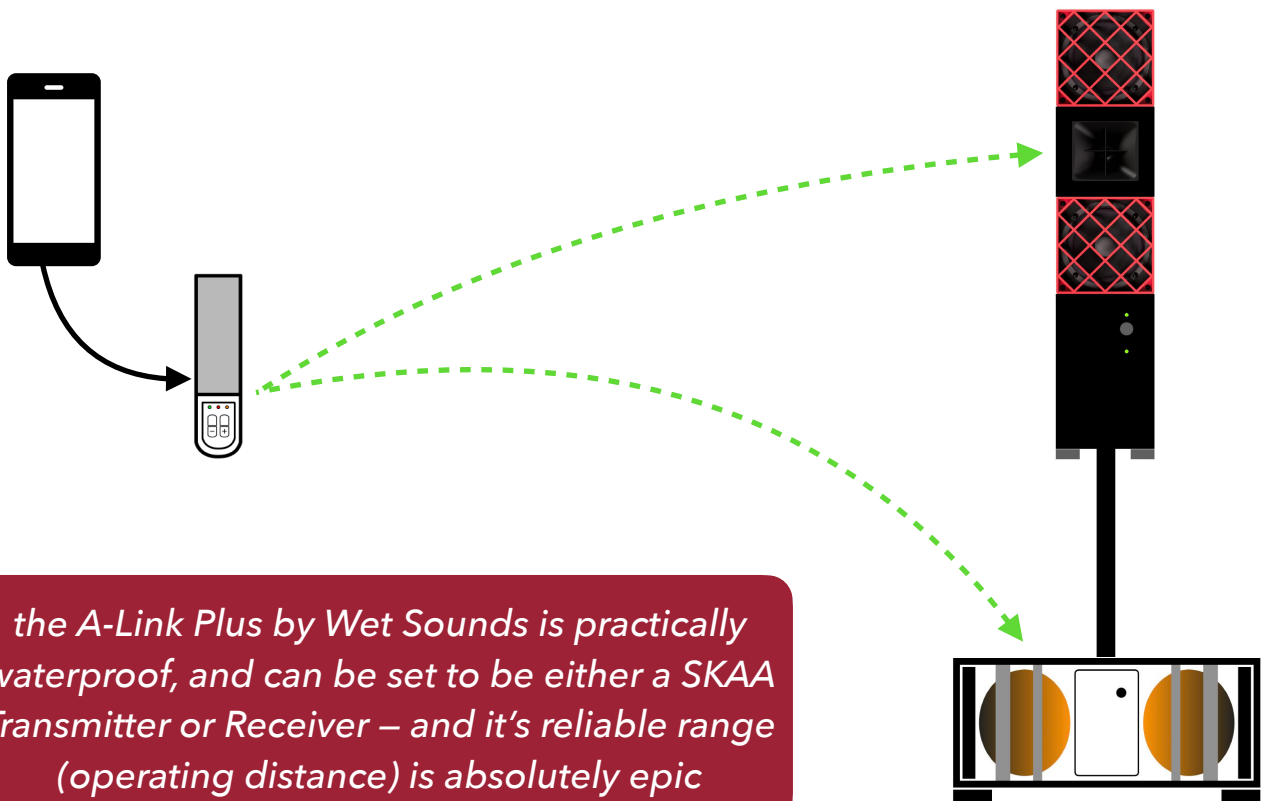

206

Surf Bum Extreme

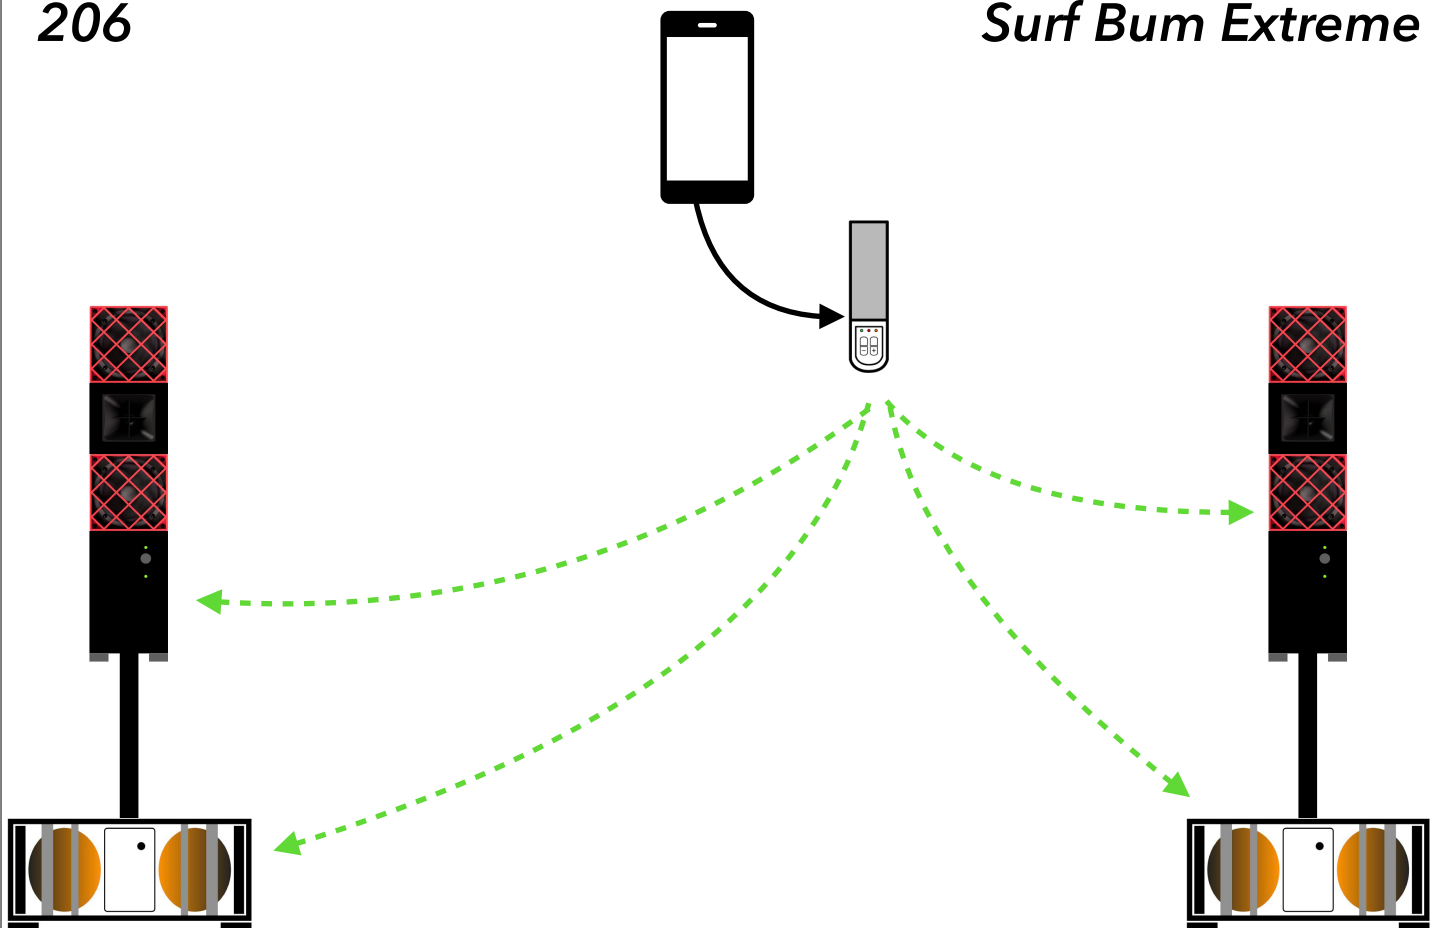


207


wet bar



A-Link Plus set
to transmit



A-Link Plus set
to receive





any powered
speaker

*the A-Link Plus comes in a 2-
pack; and you can set it to be
either a Transmitter or Receiver*

208


wattage to the cottage



boat audio
system

209


play nice

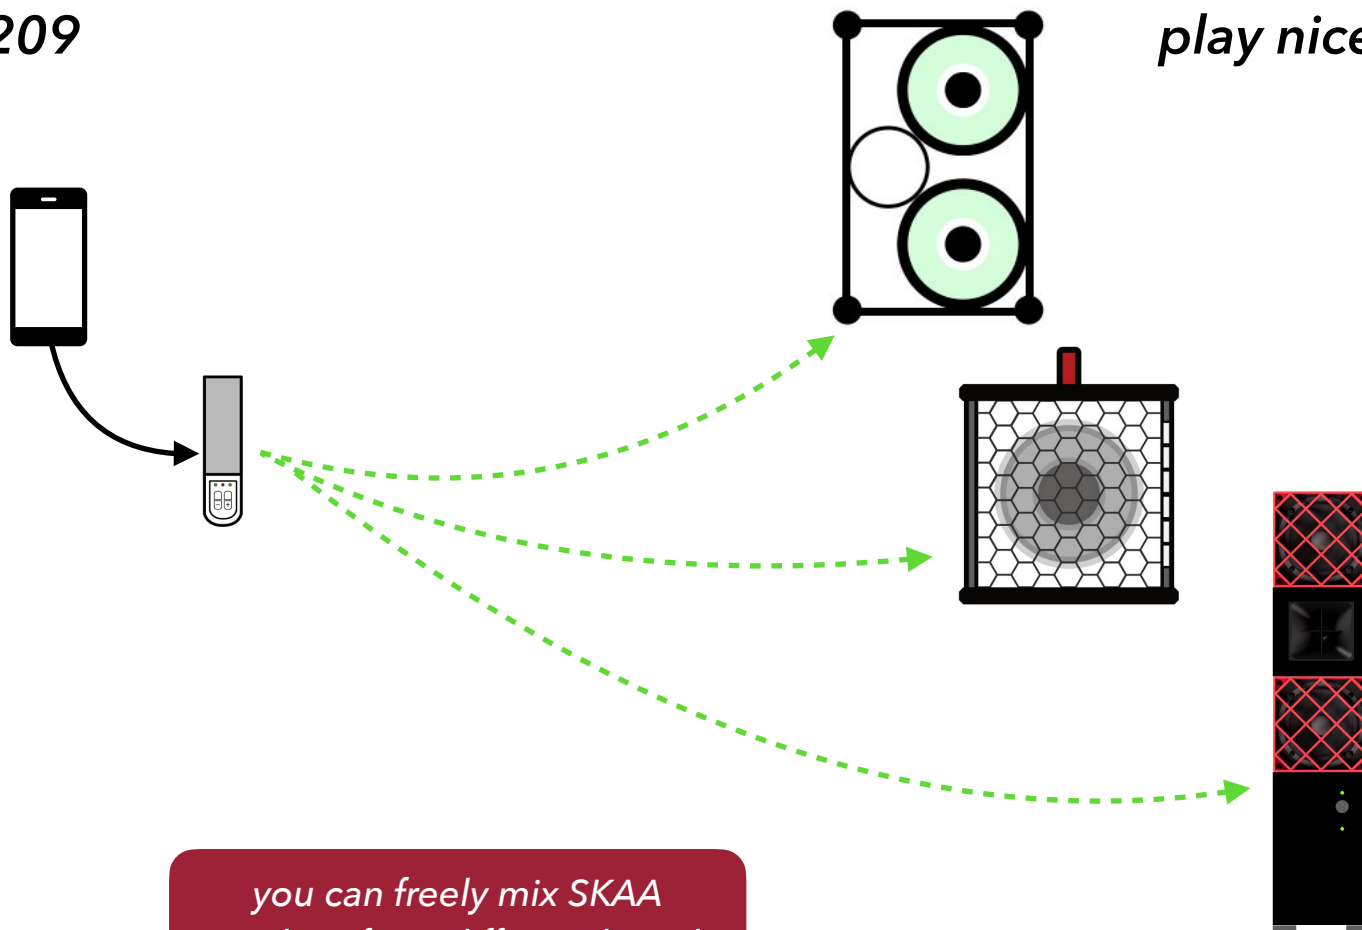

you can freely mix SKAA speakers from different brands in the same wireless network

210


play nice 2

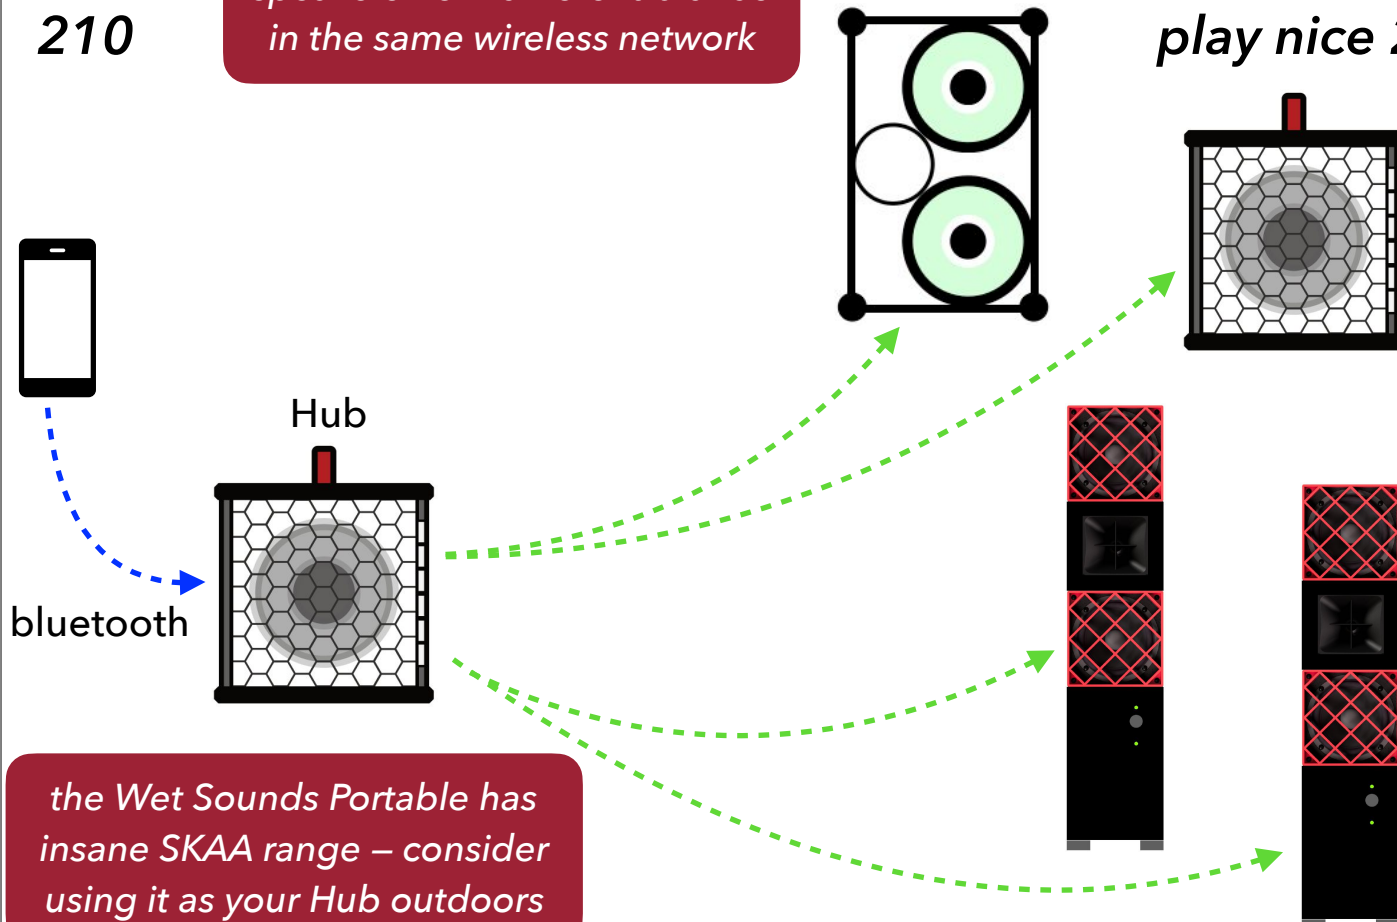

the Wet Sounds Portable has insane SKAA range – consider using it as your Hub outdoors

211


what to do with that Mackie

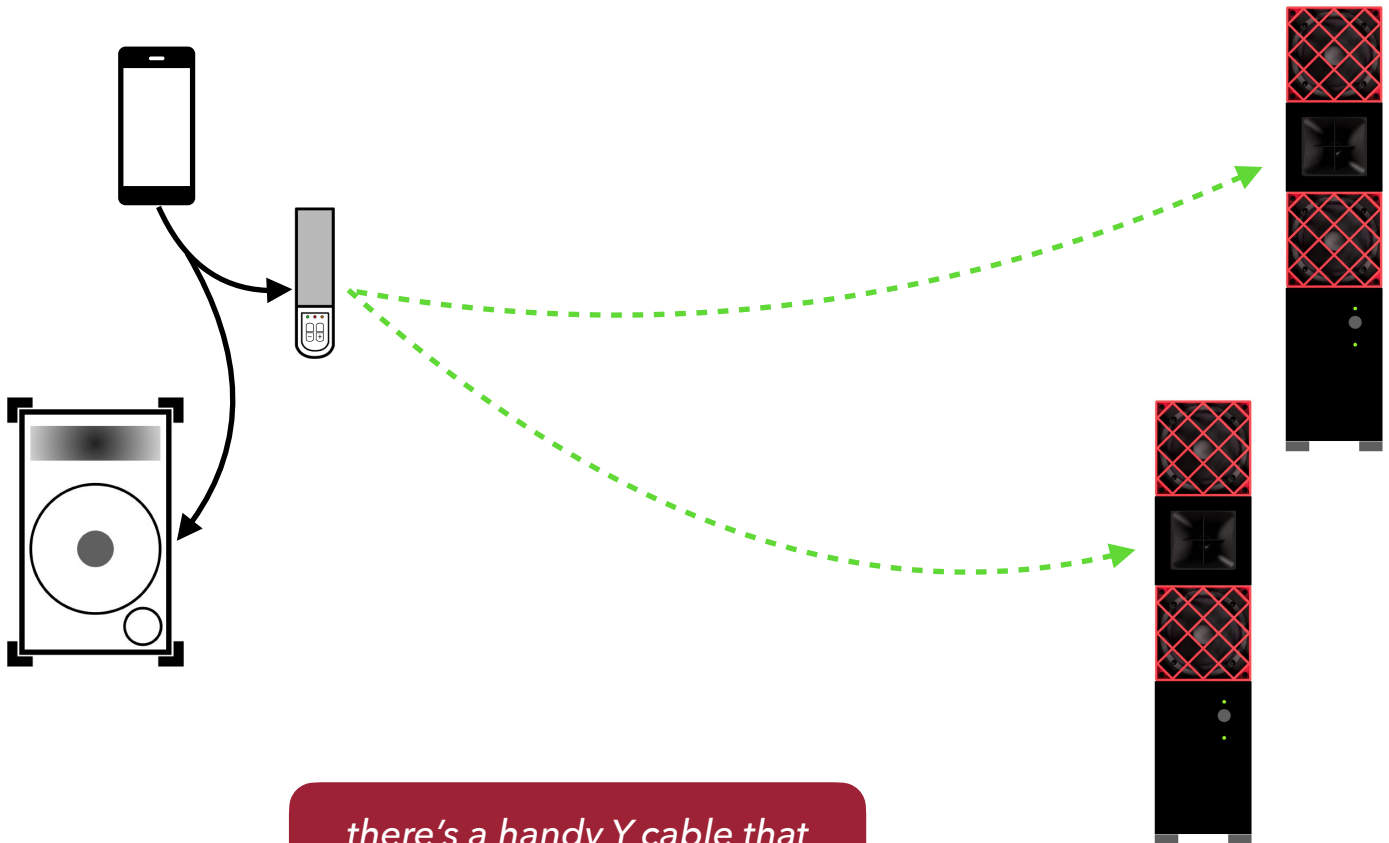

there's a handy Y cable that comes with the A-Link Plus so...


212

or those 2 Mackies

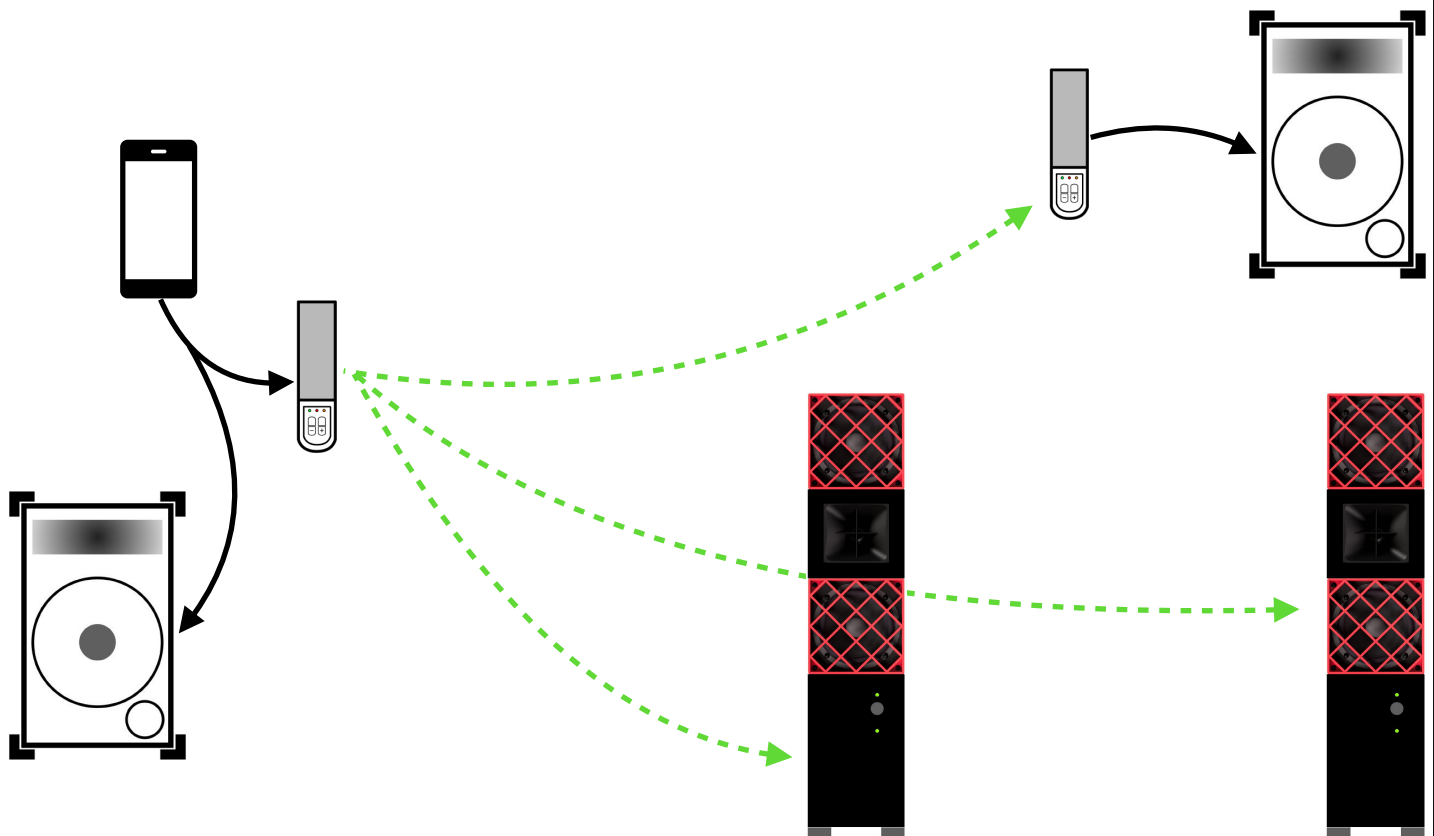

213


you'll never find my phone

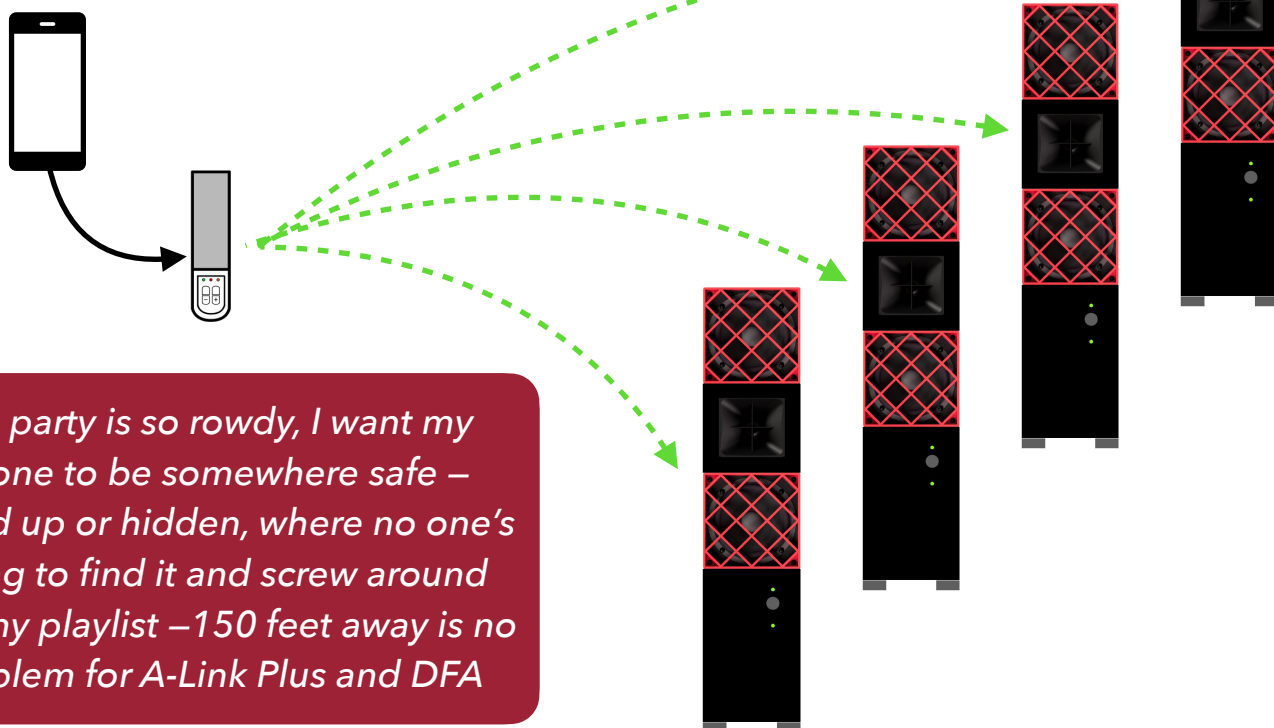

this party is so rowdy, I want my phone to be somewhere safe – locked up or hidden, where no one's going to find it and screw around with my playlist – 150 feet away is no problem for A-Link Plus and DFA

214

you'll never find my phone II

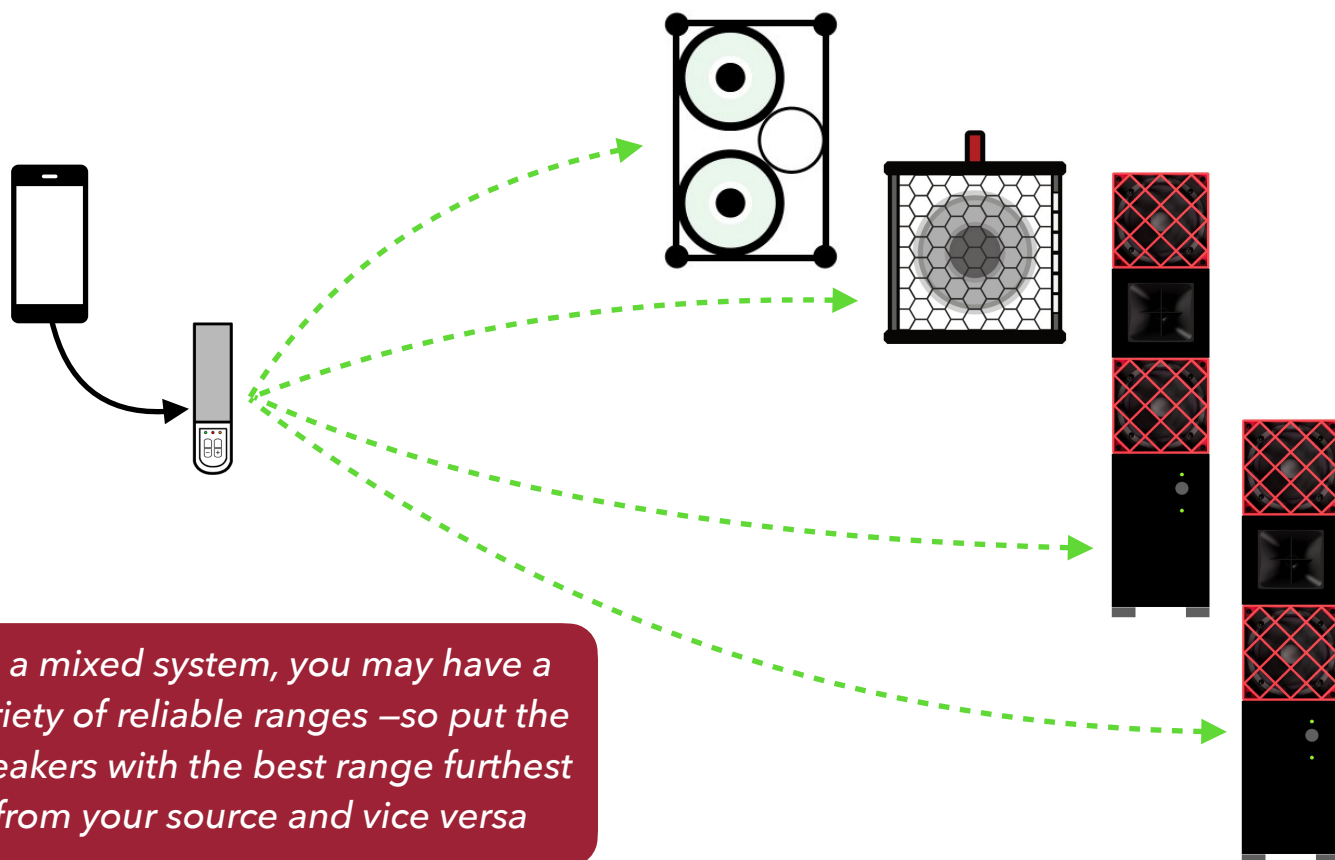

in a mixed system, you may have a variety of reliable ranges – so put the speakers with the best range furthest from your source and vice versa

